
Second Floor Plan Notes

COND FIGOR FIAM NOTES

Rainwater pipes; these are to be taken down and fully refurbished and reinstalled. They are to be put back in their orgional locations, they will be repainted with micaceous iron oxide undercoat and a Dulux Metalshield topcoat (colour to be determined, assume white as exisiting or lead grey), all joints are to be left uncaulked. The gulley is to be replaced with a new accessible gulley, the downpipes are to be fitted with a shoes.

DO NOT SCALE THIS DRAWING USE DIMENSIONS ONLY VERIFY ALL DIMENSIONS ON SITE BEFORE COMMENCING ANY WORK OR SHOP DRAWINGS $\,$ INFORM THE ARCHITECT BEFORE ANY WORK STARTS IF THIS DRAWING EXCEEDS THE QUANTITIES IN ANY WAY

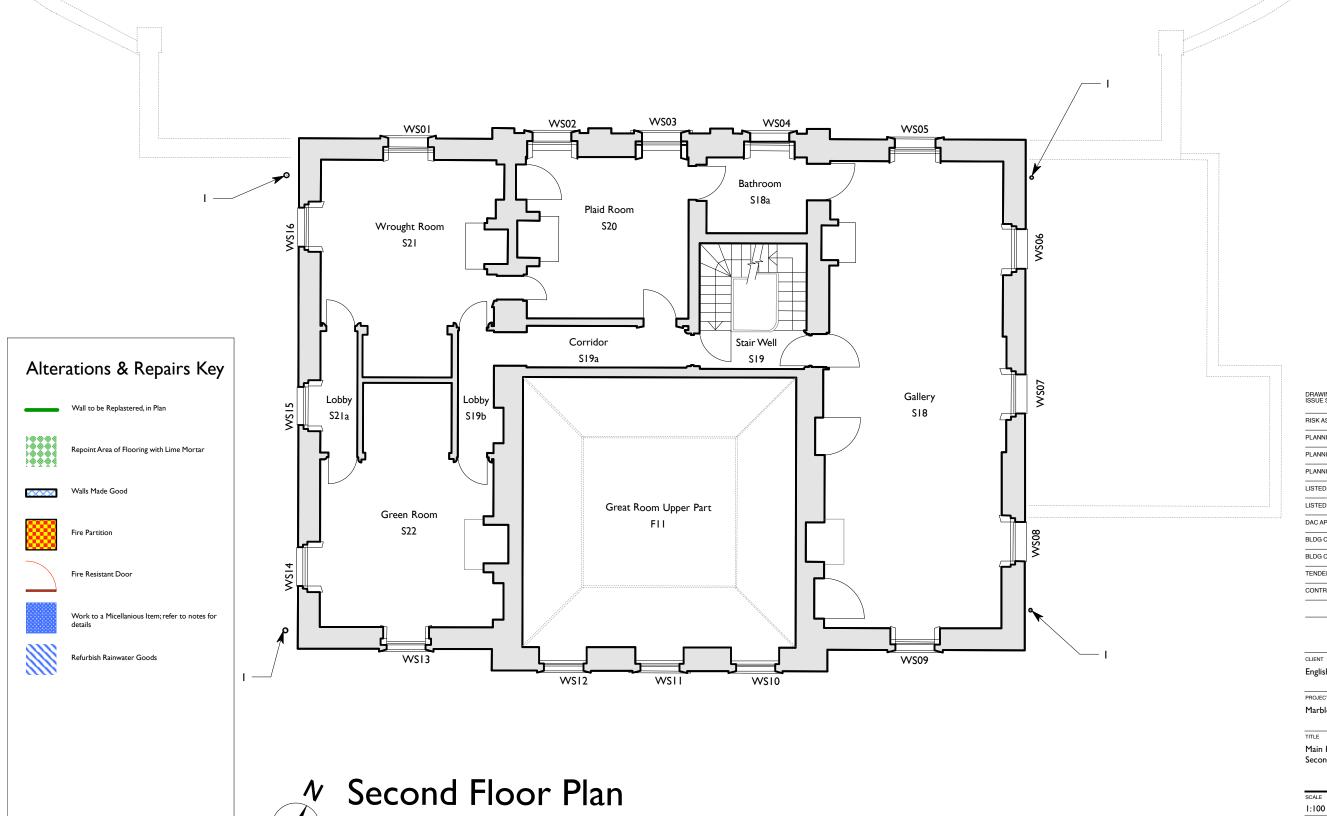

ISSUE STATUS	N°	DATE	SIGNED
RISK ASSESSMENT UNDERTAKEN			
PLANNING APPLICATION N° 1			
PLANNING APPLICATION N° 2			
PLANNING CONSENT			
LISTED BLDG APPLICATION			
LISTED BLDG CONSENT			
DAC APPROVAL			
BLDG CONTROL APPLICATION			
BLDG CONTROLAPPROVAL			
TENDER DOCUMENT			
CONTRACT DOCUMENT			

English Heritage

PROJECT Marble Hill House

TITLE

Main House: Second Floor Plan; as Proposed

SCALE	
I:100 @ A3	
DATE	DRAWN
December 2016	HS
JOB N°	DRAWING N°
16_132	212



Acanthus House 57 Hightown Road Banbury • Oxfordshire OX16 9BE Tel: 01295 702600 Fax: 01295 702601