


Revisions	AP	LP
P01 14.07.16	ADDITIONAL PLANNING INFORMATION	LP
P02 09.03.17	PLANNING AMENDMENT SUBMISSION	NH LP

- 1 ALUMINIUM SHINGLE RAINSCREEN CLADDING
- 2 DOUBLED GLAZED CURTAIN WALL SYSTEM WITH SOLAR CONTROL AND TINTED GLASS - COLOUR LIGHT GREEN
- 3 GLAZED BACK PAINTED SPANDREL PANEL INFILLS TO CURTAIN WALLING
- 4 PORCELAIN RAINSCREEN CLADDING
- 5 PPC LOUVRES DARK GREY
- 6 PPC ALUMINIUM MULLIONS AND TRANSOMS
- 7 PPC ALUMINIUM FINNINGS TO CURTAIN WALL MULLIONS COLOUR TO MATCH CURTAIN WALL FRAME
- 8 PORCELAIN SPANDREL PANEL
- 9 PRESSED ALUMINIUM ROOF EDGE PROFILE (WHITE COLOUR)
- 10 PRESSED METAL VERTICAL FINNINGS (WHITE COLOUR)
- 11 PPC METAL FLASHING TO THE TOP OF THE TURNSTILES AND GATES FASCIA EDGE
- 12 SINGLE GLAZED CURTAIN WALL SYSTEM TO TERRACE
- 13 STANDING SEAM ROOF
- 14 PPC MONORAIL SYSTEM TO PERIMETER EDGE FOR CLEANING AND MAINTENANCE VIA ABSAILING
- 15 PPC PROFILED ALUMINIUM RAINSCREEN CLADDING
- 16 PPC ALUMINIUM SPANDREL PANEL
- 17 PORCELAIN RAINSCREEN CLADDING WITH VERTICAL PATTERN
- 18 STANDING SEAM CANOPY WITH ALUMINIUM SOFFIT PANELS
- 19 WHITE PAINTED CIRCULAR HOLLOW SECTION STEEL PERIMETER COLUMNS
- 20 PRESSED METAL FLASHING DETAIL TO ROOF PARAPET - COLOUR TO MATCH LOUVRES
- 21 PRESSED METAL FLASHING DETAIL TO WINDOWS REVEALS COLOUR TO MATCH CURTAIN WALL FRAMING
- 22 EXIT GATES WITH GALVANISED AND POWDER COATED DOUBLE MESH INFILL PANELS
- 23 HPL RAINSCREEN CLADDING
- 24 WAYFINDING TO TURNSTILES AND GATES
- 25 GALVANISED AND POWDER COATED DOUBLE MESH SECURITY FENCING WITH VERTICAL POST
- 26 GREEN WALL WITH NATURAL PLANTING AND INTEGRATED IRRIGATION SYSTEM - PLANTING SPECIES TO BE DEVELOPED WITH SPECIALIST CONTRACTOR WHO WILL DEVELOP THE SUSTAINABLE PLANTING SPECIES SCHEME. IRRIGATION SYSTEM TO INCORPORATE NECESSARY FERTILISER DOSING. GREEN WALL SYSTEM AS BIOTECHTURE OR ANS GLOBAL OR SIMILAR.

NOTES
 To be read in conjunction with the following drawing series:
 001,010,020,030,110,120,200,800.

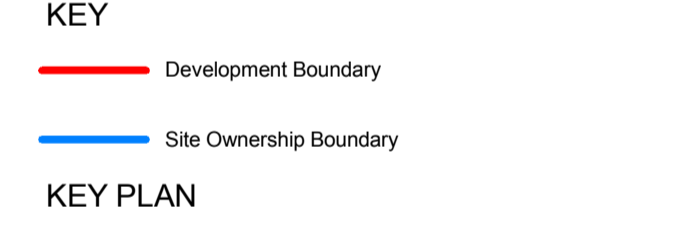

PLANNING


Client	RFU
Project	TWICKENHAM STADIUM EAST STAND EXTENSION
Drawing title	TYPICAL STREET FRONTAGE 2

KSS


Scale at A1
 As indicated

London 1 James Street London W1U 1DR T+44(0)20 7907 2222 F+44(0)20 7907 2299	Sevenoaks 7 Blighs Walk Sevenoaks TN13 1DB T+44(0)20 7907 2222 F+44(0)1732 467 841	AP 09.03.17	LP 09.03.17
------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------	----------------	----------------


Project number	Drawing number	Revision
15735	242	P02

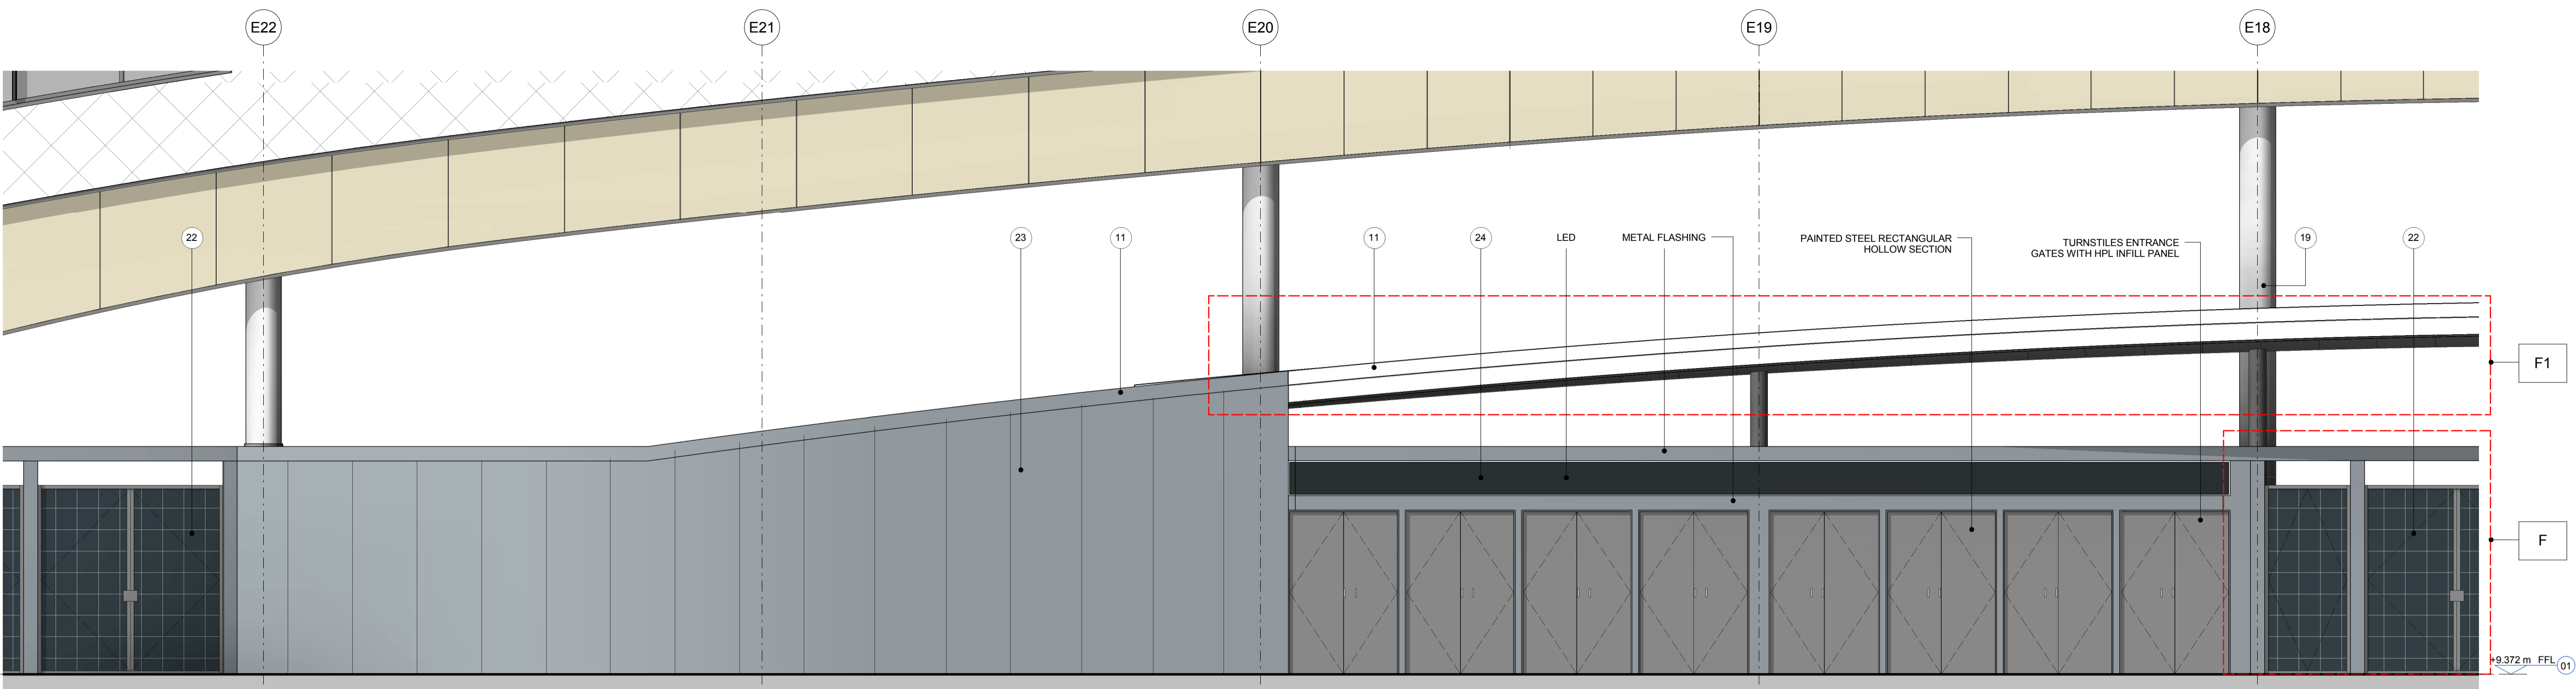

1 ELEVATION
 STREET FRONTAGE DETAILED ELEVATION 2
 1:50

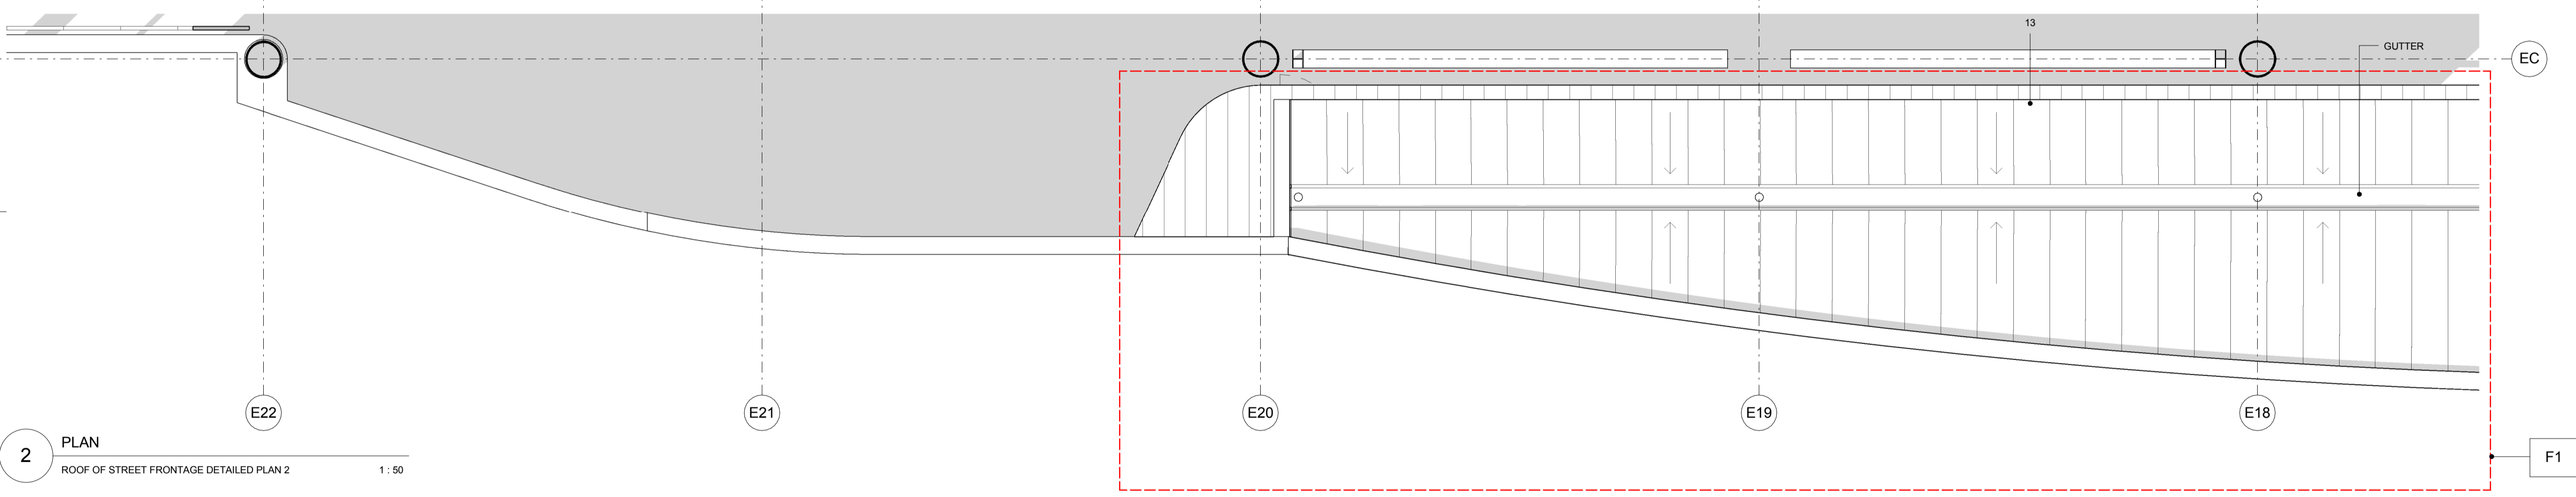

2 PLAN
 ROOF OF STREET FRONTAGE DETAILED PLAN 2
 1:50

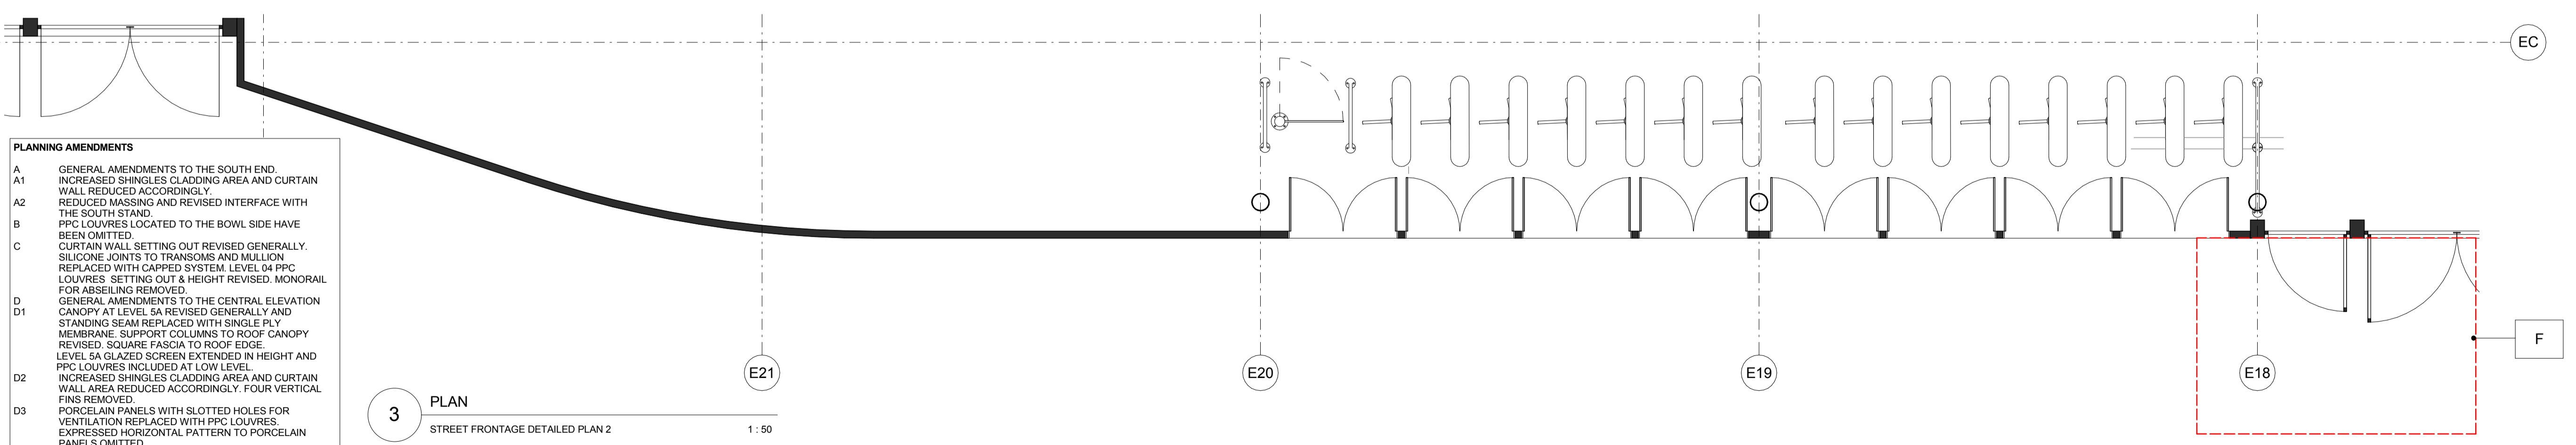

3 PLAN
 STREET FRONTAGE DETAILED PLAN 2
 1:50

- PLANNING AMENDMENTS**
- A GENERAL AMENDMENTS TO THE SOUTH END. INCREASED SHINGLES CLADDING AREA AND CURTAIN WALL REDUCED ACCORDINGLY.
 - A1 INCREASED SHINGLES CLADDING AREA AND CURTAIN WALL REDUCED ACCORDINGLY.
 - A2 REDUCED MASSING AND REVISED INTERFACE WITH THE SOUTH STAND.
 - B PPC LOUVRES LOCATED TO THE BOWL SIDE HAVE BEEN OMITTED.
 - C CURTAIN WALL SETTING OUT REVISED GENERALLY. SILICONE JOINTS TO TRANSOMS AND MULLION REPLACED WITH CAPPED SYSTEM. LEVEL 04 PPC LOUVRES SETTING OUT & HEIGHT REVISED. MONORAIL FOR ABSAILING REMOVED.
 - D GENERAL AMENDMENTS TO THE CENTRAL ELEVATION CANOPY AT LEVEL 5A REVISED GENERALLY AND STANDING SEAM REPLACED WITH SINGLE PLY MEMBRANE. SUPPORT COLUMNS TO ROOF CANOPY REVISED. SQUARE FASCIA TO ROOF EDGE.
 - D1 LEVEL 5A GLAZED SCREEN EXTENDED IN HEIGHT AND PPC LOUVRES INCLUDED AT LOW LEVEL.
 - D2 INCREASED SHINGLES CLADDING AREA AND CURTAIN WALL AREA REDUCED ACCORDINGLY. FOUR VERTICAL FINNINGS REMOVED.
 - D3 PORCELAIN PANELS WITH SLOTTED HOLES FOR VENTILATION REPLACED WITH PPC LOUVRES. EXPRESSED HORIZONTAL PATTERN TO PORCELAIN PANELS OMITTED.
 - E GENERAL AMENDMENTS TO THE NORTH END PORCELAIN CLADDING REPLACED WITH PPC ALUMINIUM CLADDING.
 - E1 PORCELAIN CLADDING REPLACED WITH PPC ALUMINIUM CLADDING.
 - E2 GREEN WALL TO THE NORTH END EXTENDED AND PPC LOUVRES REMOVED.
 - E3 INCREASED SHINGLES CLADDING AREA AND CURTAIN WALL REDUCED ACCORDINGLY.
 - F FENCELINE, GATE AND PERIMETER COLUMNS SETTING OUT REVISED.
 - F1 CANOPY TO TURNSTILES REVISED.
 - G PORCELAIN PATTERN CHANGED FROM HORIZONTAL TO VERTICAL.
 - H PORCELAIN PANELS TO THE SOFFIT OF THE ARCH REPLACED WITH PPC ALUMINIUM PANELS. PORCELAIN PANELS SETTING OUT REVISED.
 - K ROOF TO LEVEL 5A (NORTH END) EXTENDED.
 - L GLAZED SPANDREL PANELS REPLACED WITH METAL SPANDREL PANEL. PORCELAIN PANELS REPLACED WITH PPC ALUMINIUM CLADDING.
 - L1 PPC LOUVRES INCLUDED FOR MECHANICAL VENTILATION.