
Asbestos

8. New FD30 or FD60 door leafs fitted to the existing frames. Refer to Door Schedule 330,

- 12. Remove the asbestos lining from the staircase and repair structure in accordance with report.
- 13. Installation of the fire partitions and roof structure underside cladding. Refer to Drawing 312,
- 14. Add reinforcement to the Great Hall ceiling timbers where they have been cut through historically.
- 15. Chandelier winch is modern and currently not operational; this is to be repaired and/or replaced. 16. All existing cast iron rainwater pipes & lead rainwater goods are to be taken down, fully refurbished, redecorated/refinshed and reinstalled. They are to be reinstalled in their original locations; the downpipes are to be adapted and be fitted with shoes. The gulleys are to be replaced

with new earthenware accessible gulleys fitted with cast iron covers. Paint colour to match

DO NOT SCALE THIS DRAWING USE DIMENSIONS ONLY VERIFY ALL DIMENSIONS ON SITE BEFORE COMMENCING ANY WORK OR SHOP DRAWINGS $\,$ INFORM THE ARCHITECT BEFORE ANY WORK STARTS IF THIS DRAWING EXCEEDS THE QUANTITIES IN ANY WAY

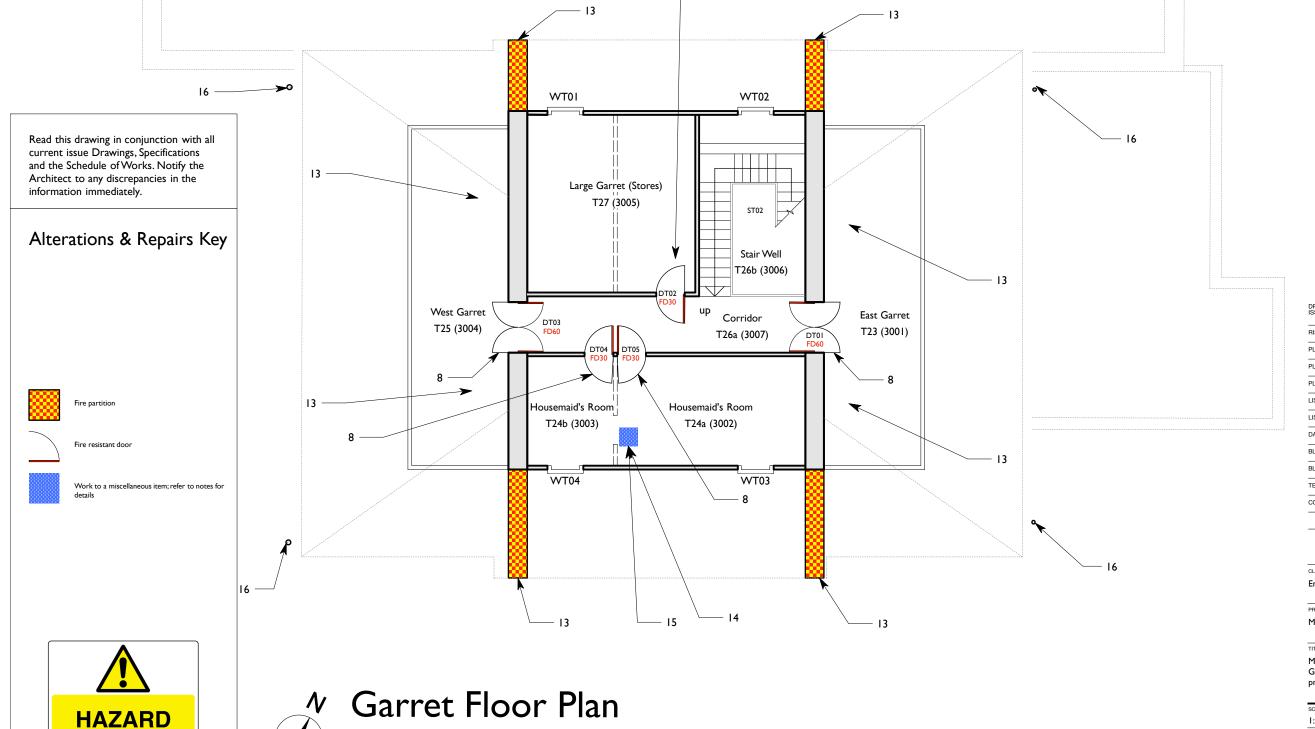

ISSUE STATUS	N°
RISK ASSESSMENT UNDERTAKEN	
PLANNING APPLICATION N° 1	
PLANNING APPLICATION N° 2	
PLANNING CONSENT	
LISTED BLDG APPLICATION	
LISTED BLDG CONSENT	
DAC APPROVAL	
BLDG CONTROL APPLICATION	
BLDG CONTROL APPROVAL	
TENDER DOCUMENT	
CONTRACT DOCUMENT	

English Heritage

PROJECT

Marble Hill House

TITLE

Main House: Garrett (Third) Floor Plan; as

16 132	213 C
JOB N°	DRAWING N°
December 2016	HS
DATE	DRAWN
I:100 @ A3	
SCALE	

Clews architects Acanthus House

57 Hightown Road Banbury • Oxfordshire OX16 9BE Tel: 01295 702600 Fax: 01295 702601