

Drainage Strategy Note (including SuDS Pro-Forma)

The Former Stag Brewery - Temporary Application for Filming

Date: July 2022

Client Name: Reselton Properties Ltd

Document Reference: WIE18671-113-R-12-3-1

This document has been prepared and checked in accordance with
Waterman Group's IMS (BS EN ISO 9001: 2015, BS EN ISO 14001: 2015 and BS EN ISO 45001:2018)

Issue	Prepared by	Checked by	Approved by
01	Nora Balboni Senior Engineer	Ellen Smith Senior Consultant	Ros Boalch Associate Director
			
02	Ellen Smith Principal Consultant	Sean Whelan Senior Engineer	Steve Brindle Associate Director
			
03	James Malone Consultant	Ellen Smith Principal Consultant	Steve Brindle Associate Director
			


1. Introduction

- 1.1. Waterman Infrastructure & Environment Ltd (Waterman IE) was commissioned by Reselton Properties Ltd to undertake a Drainage Strategy at the former Stag Brewery Site in Mortlake ('the Site') within the London Borough of Richmond Upon Thames ('LBRuT').
- 1.2. This Drainage Strategy Note has been prepared to support the update and renewal of the approved temporary use planning application (planning application 19/3870/FUL) for film production operations and ancillary activities within the Site (hereafter referred to as the 'Development'), which seeks to extend the existing two year permission by a further five years. There are no changes to the existing operating conditions other than the incorporation of the Sports Pavilion (Building 14) and an external film set created in the space adjacent to the Maltings. All buildings are being applied for use, with full details provided at this stage for Buildings 11, 12, 14 and 15 (with the other buildings only to be used following the submission of further details via condition). For full details of the proposed operations and activities as part of the Development please refer to the Environmental Assessment Note submitted with the planning application.

Site Setting

- 1.3. The Site is centred on Ordnance Survey Grid Reference (NGR) TQ 204 760 and is bounded by Lower Richmond Road to the south, the River Thames and the Thames Bank to the north, Williams Lane to the east and Bulls Alley (off Mortlake High Street) to the west. The Site is bisected by Ship Lane. The Site is dominated by a mixture of large-scale industrial brewing structures (refer to Figure 1 overleaf) and large areas of hardstanding with scattered trees.

Figure 1: Existing Buildings and Structures on the Site

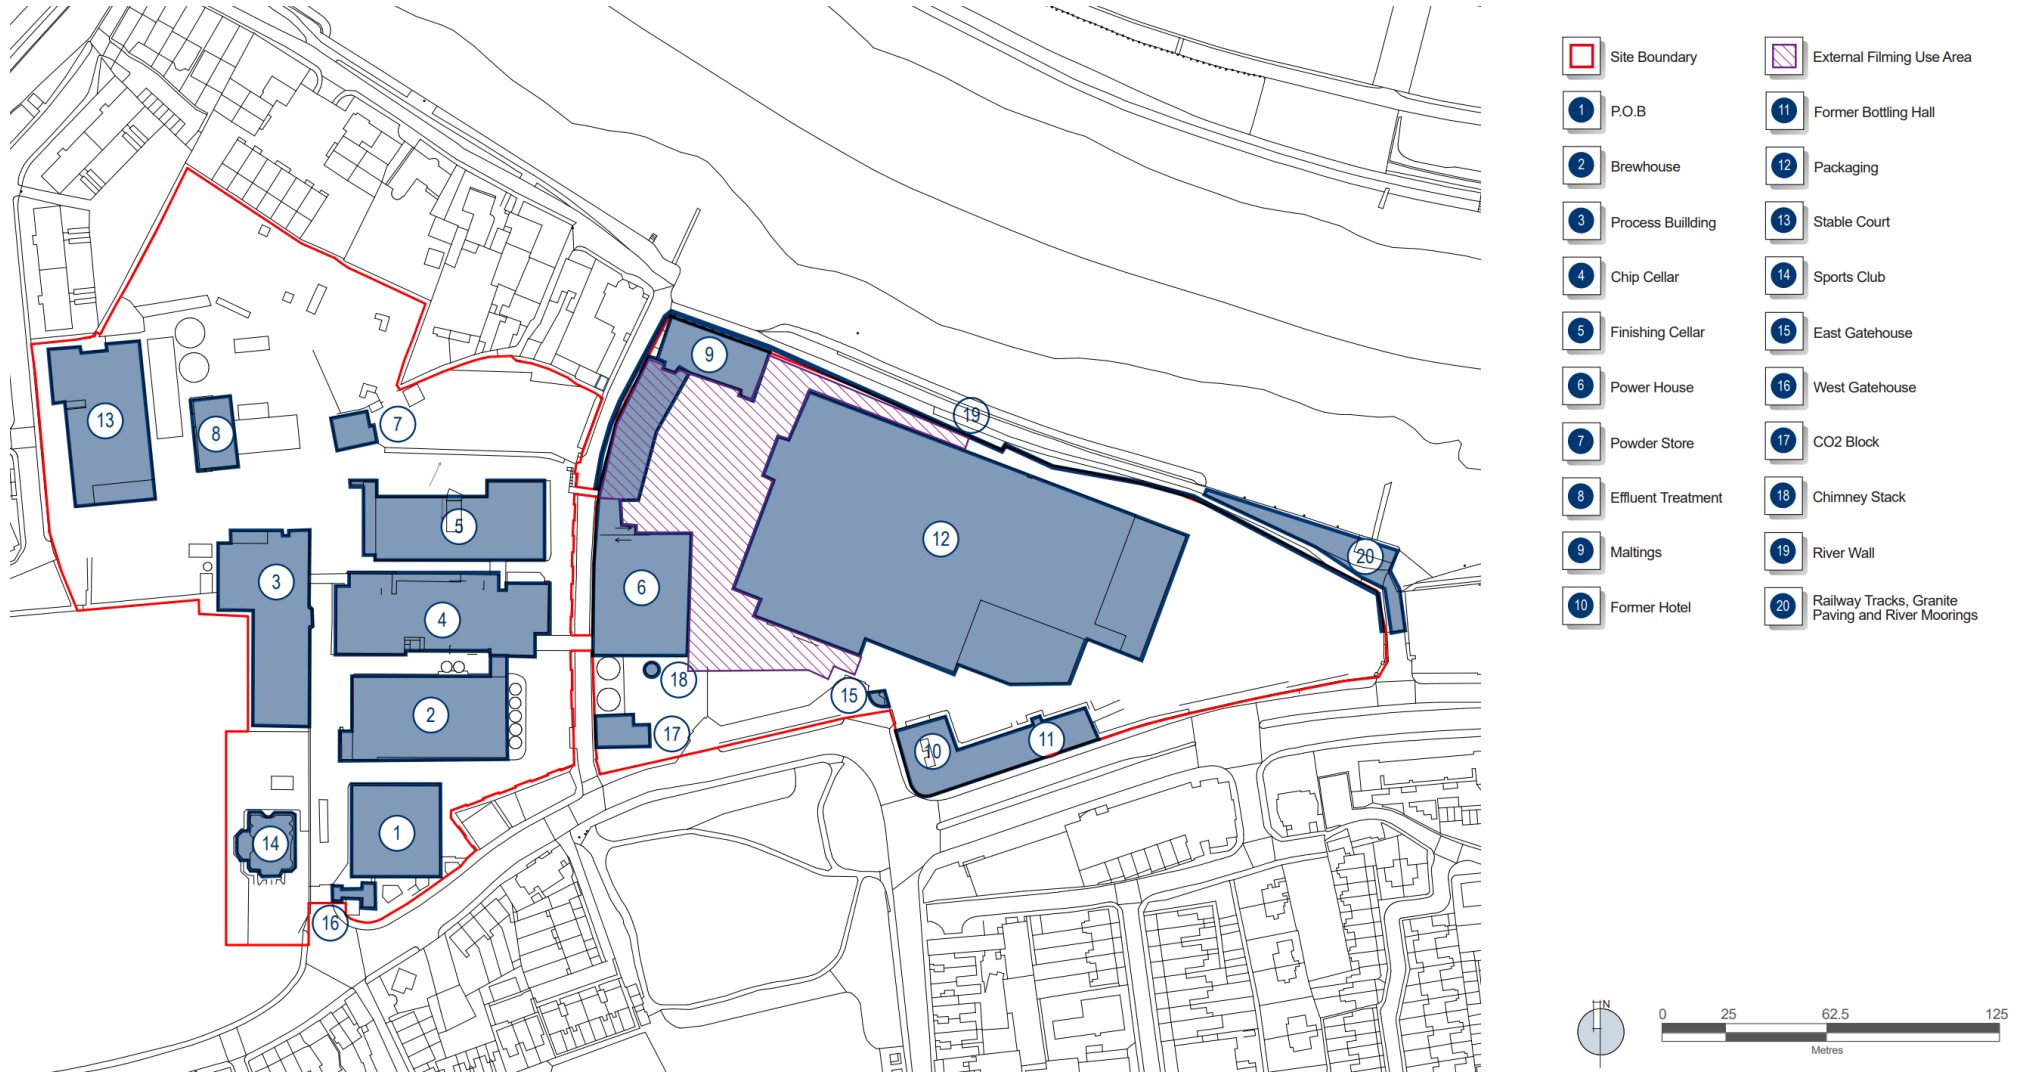

Topography

- 1.4. The Site is generally flat with no significant variations in the topographical gradient. The LiDAR map indicates that it is lowest to the east of the Site (4 to 6 m AOD) and highest in the north west of the Site (8 to 10 m AOD).

Drainage

- 1.5. Thames Water sewer records (Appendix A) indicate that several sewers are present in the vicinity of and crossing the Site, as indicated in Table 1.

Table 1: Existing Sewers Associated with the Site

Location	Sewer
Crossing through the north-west of the Site.	225mm diameter Thames Water foul sewer.
Within north-west of the Site.	Two Thames Water foul rising mains.
Along north-eastern boundary of the Site along Thames towpath.	686mm diameter combined Thames Water sewer.
West of the Site along Williams Lane.	900mm diameter Thames Water surface water sewer.
South of the Site along Lower Richmond Road.	600mm diameter Thames Water surface water sewer.
	750mm diameter and 225mm diameter Thames Water foul water sewer.
Centre of the Site along Ship Lane.	600mm diameter Thames Water surface water sewer.
	225mm diameter Thames Water foul water sewer.

- 1.6. The existing surface water drainage regime has been established to be as follows:
- Existing surface water flows from the north-east of the Site discharges into the Thames via an existing outfall; and
 - Existing surface water flows from the remainder of the Site discharges to the Thames Water sewer network at various connection points.

2. Assessment

- 2.1. No intrusive works are proposed as part of the proposals, with no change to external surfaces or to the external footprint of the buildings (other than the erection of a temporary film set in the external area adjacent to the Maltings). The proposals comprise a temporary change of use for film production operations and ancillary activities only, which would have no effect on the physical buildings/areas within the site. There would therefore be no change to the impermeable area as a result of the Proposed Development. The surface water discharge rate from the site would therefore remain as per the existing situation, draining via the existing regime outlined above. Rainwater downpipes and existing connections would remain unchanged. The Proposed Development would therefore have no impact on the surface water drainage regime within the Site.

- 2.2. It is therefore not considered appropriate or sustainable to include surface water attenuation features or Sustainable Drainage Systems (SuDS), which would require intrusive works.
- 2.3. The LBRuT SuDS Pro Forma has been completed (Appendix B), summarising the above assessment.

3. Conclusion

- 3.1. The proposed Development, including the erection of external film sets, would not alter the external fabric of the buildings on site, or the areas of hard and soft landscaping and therefore surface water runoff from the Site would continue to drain through the existing downpipes and connections into the Thames Water sewer network and into the River Thames via the existing outfall, as per the existing situation. The proposed Development would result in no increase in impermeable area. Irrespective of the point of discharge from the Site, there would be no impact on the capacity of the existing network.
- 3.2. In summary, no significant adverse surface water drainage effects would arise as a result of the temporary use planning application.



APPENDICES

Appendices

Drainage Strategy Note (including SuDS Pro-Forma)

WIE18671-113-R-12-3-1



A. Thames Water Asset Plans

Appendices

Sewer Flooding

History Enquiry



Waterman Infrastructure & Environment

Search address supplied Stag Brewing Co Ltd
The Stag Brewery
Mortlake
London
SW14 7ET

Your reference WIE10667

Our reference SFH/SFH Standard/2016_3238633

Received date 22 January 2016

Search date 23 January 2016

Thames Water Utilities Ltd

Property Searches
PO Box 3189
Slough SL1 4WW

DX 151280 Slough 13

T 0118 925 1504

E searches@thameswater.co.uk

I www.thameswater-propertysearches.co.uk

Registered in England and Wales
No. 2366661, Registered office
Clearwater Court, Vastern Road
Reading RG1 8DB

Sewer Flooding

History Enquiry



Search address supplied: Stag Brewing Co Ltd, The Stag
Brewery, Mortlake, London, SW14 7ET

This search is recommended to check for any sewer flooding in a specific address or area

TWUL, trading as Property Searches, are responsible in respect of the following:-

- (i) any negligent or incorrect entry in the records searched;
- (ii) any negligent or incorrect interpretation of the records searched;
- (iii) and any negligent or incorrect recording of that interpretation in the search report
- (iv) compensation payments

Thames Water Utilities Ltd

Property Searches
PO Box 3189
Slough SL1 4WW

DX 151280 Slough 13

T 0118 925 1504

E searches@thameswater.co.uk

I www.thameswater-propertysearches.co.uk

Registered in England and Wales
No. 2366661, Registered office
Clearwater Court, Vastern Road
Reading RG1 8DB

Sewer Flooding

History Enquiry



History of Sewer Flooding

Is the requested address or area at risk of flooding due to overloaded public sewers?

The flooding records held by Thames Water indicate that there have been no incidents of flooding in the requested area as a result of surcharging public sewers.

For your guidance:

- A sewer is “overloaded” when the flow from a storm is unable to pass through it due to a permanent problem (e.g. flat gradient, small diameter). Flooding as a result of temporary problems such as blockages, siltation, collapses and equipment or operational failures are excluded.
- “Internal flooding” from public sewers is defined as flooding, which enters a building or passes below a suspended floor. For reporting purposes, buildings are restricted to those normally occupied and used for residential, public, commercial, business or industrial purposes.
- “At Risk” properties are those that the water company is required to include in the Regulatory Register that is presented annually to the Director General of Water Services. These are defined as properties that have suffered, or are likely to suffer, internal flooding from public foul, combined or surface water sewers due to overloading of the sewerage system more frequently than the relevant reference period (either once or twice in ten years) as determined by the Company’s reporting procedure.
- Flooding as a result of storm events proven to be exceptional and beyond the reference period of one in ten years are not included on the At Risk Register.
- Properties may be at risk of flooding but not included on the Register where flooding incidents have not been reported to the Company.
- Public Sewers are defined as those for which the Company holds statutory responsibility under the Water Industry Act 1991.
- It should be noted that flooding can occur from private sewers and drains which are not the responsibility of the Company. This report excludes flooding from private sewers and drains and the Company makes no comment upon this matter.
- For further information please contact Thames Water on Tel: 0800 316 9800 or website www.thameswater.co.uk

Thames Water Utilities Ltd

Property Searches
PO Box 3189
Slough SL1 4WW

DX 151280 Slough 13

T 0118 925 1504

E searches@thameswater.co.uk

I www.thameswater-propertysearches.co.uk

Registered in England and Wales
No. 2366661, Registered office
Clearwater Court, Vastern Road
Reading RG1 8DB



The width of the displayed area is 500m and the centre of the map is located at OS coordinates 520250,175750
The position of the apparatus shown on this plan is given without obligation and warranty, and the accuracy cannot be guaranteed. Service pipes are not shown but their presence should be anticipated. No liability of any kind whatsoever is accepted by Thames Water for any error or omission. The actual position of mains and services must be verified and established on site before any works are undertaken.

Based on the Ordnance Survey Map with the Sanction of the controller of H.M. Stationery Office, License no. 100019345 Crown Copyright Reserved.

NB. Levels quoted in metres Ordnance Newlyn Datum. The value -9999.00 indicates that no survey information is available


Manhole Reference	Manhole Cover Level	Manhole Invert Level
4512	6.54	4.41
4601	6.78	4.11
46MK	n/a	n/a
46NE	n/a	n/a
46NL	n/a	n/a
4605	6.03	4.3
4604	5.92	2.97
4603	6.02	4.11
4602	5.92	2.18
46MN	n/a	n/a
46NH	n/a	n/a
46LN	n/a	n/a
461A	n/a	n/a
4508	6.77	5.28
4507	n/a	n/a
4506	6.76	5.22
4501	6.75	4.26
451B	n/a	n/a
451A	n/a	n/a
4502	6.44	3.91
4510	6.45	3.59
4511	6.34	3.37
4504	6.33	2.52
4503	6.45	2.92
4513	6.36	3.22
4505	n/a	2.86
4802	5.35	.8
4716	n/a	n/a
4706	6.33	4.22
4717	n/a	n/a
4707	n/a	n/a
4801	5.22	1.38
4708	n/a	n/a
4714	5.95	3.74
4718	n/a	n/a
4705	5.87	2.69
4713	5.79	1.65
4715	5.75	2.45
4711	6.05	2.52
4712	n/a	n/a
4703	5.84	1.98
4804	5.05	2.06
4803	4.95	n/a
4908	4.97	n/a
4905	5.03	2.59
4904	5.02	.89
4903	5.08	.89
4907	4.94	2.32
4902	4.86	1.96
4906	4.96	n/a
4901	4.93	2.36
35LH	n/a	n/a
35LJ	n/a	n/a
3502	6.37	5.2
3501	6.57	5.49
4509	5.71	5.46
351A	n/a	n/a
361A	n/a	n/a
3611	6.7	4.84
3610	6.8	4.74
3609	6.77	4.77
3604	6.76	4.09
46ME	n/a	n/a
3605	6.78	3.94
36LL	n/a	n/a
36LM	n/a	n/a
3603	n/a	n/a
36NC	n/a	n/a
36NL	n/a	n/a
36NK	n/a	n/a
36NH	n/a	n/a
36MM	n/a	n/a
361B	n/a	n/a
3802	5.33	3.22
39MJ	n/a	n/a
39NE	n/a	n/a
391A	n/a	n/a
38LK	n/a	n/a
38MK	n/a	n/a
38ML	n/a	n/a
39ND	n/a	n/a
39NK	n/a	n/a
3904	5.14	2.68
3907	5.99	1.99
39NJ	n/a	n/a
39NC	n/a	n/a
3902	4.98	3.64
3903	6	1.53
3906	5.17	2.03
3908	n/a	n/a
3905	5.19	2.25

Manhole Reference	Manhole Cover Level	Manhole Invert Level
3901	5.2	1.62
361C	n/a	n/a
3608	6.19	5.48
36MJ	n/a	n/a
36MH	n/a	n/a
36NF	n/a	n/a
36ML	n/a	n/a
361D	n/a	n/a
3602	5.82	3.69
3701	6.15	3.48
3702	6.16	4.58
271D	n/a	n/a
371B	n/a	n/a
2701	5.59	2.87
371A	n/a	n/a
371D	n/a	n/a
371C	n/a	n/a
1603	6.29	5.13
1506	6.76	5.16
1503	6.75	4.86
26MK	n/a	n/a
26ME	n/a	n/a
26LF	n/a	n/a
26LE	n/a	n/a
26LN	n/a	n/a
26LM	n/a	n/a
26LD	n/a	n/a
26LL	n/a	n/a
2601	6.27	4.87
2602	6.33	5.17
2510	6.72	4.76
2508	6.68	5.12
26HD	n/a	n/a
2502	6.83	5.04
2503	6.67	4.98
261A	n/a	n/a
26FN	n/a	n/a
2604	n/a	n/a
251B	n/a	n/a
251A	n/a	n/a
35MN	n/a	n/a
3607	6.32	4.48
3606	6.55	4.89
35NF	n/a	n/a
35MJ	n/a	n/a
3601	6.58	4.51
16NK	n/a	n/a
16ME	n/a	n/a
16LM	n/a	n/a
271A	n/a	n/a
271C	n/a	n/a
26MF	n/a	n/a
271B	n/a	n/a
27NM	n/a	n/a
26HM	n/a	n/a
26HL	n/a	n/a
2702	6.33	5.28
281A	n/a	n/a
261B	n/a	n/a
2703	5.61	2.87
2603	n/a	n/a
3804	4.67	4.08
3801	n/a	n/a
1809	5.06	3.86
1804	5.11	n/a
1805	5.12	2.35
1801	5.09	.25
2808	5.07	3.63
381D	n/a	n/a
2807	5.2	3.42
381C	n/a	n/a
381B	n/a	n/a
2803	5.26	2.16
2802	5.28	.38
381A	n/a	n/a
38NL	n/a	n/a
38NH	n/a	n/a
38NM	n/a	n/a
38NJ	n/a	n/a
2809	5.07	n/a
2805	5.19	2.78
2806	5.3	3.26
3803	4.87	3.65
38LM	n/a	n/a
2801	5.32	.44
38MM	n/a	n/a
2804	5.33	1.95
38LL	n/a	n/a
16JM	n/a	n/a
26KL	n/a	n/a
06NL	n/a	n/a
26KK	n/a	n/a
16LH	n/a	n/a

Manhole Reference	Manhole Cover Level	Manhole Invert Level
26KJ	n/a	n/a
1604	6.26	5.46
16LD	n/a	n/a
1601	6.28	4.59
26KD	n/a	n/a
16KM	n/a	n/a
26KC	n/a	n/a
16KJ	n/a	n/a
16MM	n/a	n/a
26JN	n/a	n/a
16KE	n/a	n/a
261C	n/a	n/a
1606	6.33	5.49
1602	6.34	5.24
26JJ	n/a	n/a
26JH	n/a	n/a
26JF	n/a	n/a
161A	n/a	n/a
16MN	n/a	n/a
16NG	n/a	n/a
26HN	n/a	n/a
16LN	n/a	n/a
0613	6.15	4.12
0606	n/a	n/a
0614	6.16	3.64
0506	n/a	n/a
0610	6.19	5.11
0517	n/a	n/a
0611	n/a	n/a
0604	6.15	3.68
0516	n/a	n/a
0504	6.97	4.62
0609	6.14	4.77
0515	6.78	3.96
0501	6.94	4.13
151A	n/a	n/a
151C	n/a	n/a
151B	n/a	n/a
16JJ	n/a	n/a
1508	6.71	4.9
1504	6.71	5.25
1502	6.89	5.09
16LL	n/a	n/a
1505	6.86	5.41
16MF	n/a	n/a
1605	6.3	5.42
09ND	n/a	n/a
09NM	n/a	n/a
09NJ	n/a	n/a
09NL	n/a	n/a
091A	n/a	n/a
0903	n/a	n/a
0904	5.55	3.51
0901	n/a	n/a
0902	5.59	1.67
09MN	n/a	n/a
19NE	n/a	n/a
19NL	n/a	n/a
19NM	n/a	n/a
19NF	n/a	n/a
19NH	n/a	n/a
19MK	n/a	n/a
19MJ	n/a	n/a
19MF	n/a	n/a
19MH	n/a	n/a
18ME	n/a	n/a
1901	n/a	n/a
0807	5.16	2.54
07NK	n/a	n/a
0804	5.18	1.83
0802	5.19	.09
0703	5.21	3.38
0701	5.18	2.31
0702	n/a	n/a
0605	6.1	2.99
0809	5.08	2.26
0808	5.06	2.47
07ML	n/a	n/a
07NE	n/a	n/a
0805	5.1	1.16
0801	5.15	.14
08NM	n/a	n/a
18NJ	n/a	n/a
18MN	n/a	n/a
18NK	n/a	n/a
18NC	n/a	n/a
18NL	n/a	n/a
18ND	n/a	n/a
18NM	n/a	n/a
1808	5.26	2.26
1807	5.17	2.41
1806	5	2.43
1802	5.16	.2

Manhole Reference	Manhole Cover Level	Manhole Invert Level
1803	5.03	2.03
05LD	n/a	n/a
05LE	n/a	n/a
07LK	n/a	n/a
07KN	n/a	n/a
08NE	n/a	n/a
08NC	n/a	n/a
0803	5.12	.01
07LM	n/a	n/a
07LD	n/a	n/a
071B	n/a	n/a
07NM	n/a	n/a
0806	5.16	2.62
071A	n/a	n/a
07ME	n/a	n/a
07LJ	n/a	n/a
0507	6.41	5.15
0503	6.36	4.68
0607	5.99	4.16
0608	6	4.7
25ML	n/a	n/a
25MN	n/a	n/a
35LD	n/a	n/a
35LE	n/a	n/a
35LF	n/a	n/a
2506	6.95	5.58
2501	6.76	5.28
2504	6.82	5.1
35LC	n/a	n/a
2507	6.79	5.15
2505	6.65	5.28
25MJ	n/a	n/a
35NK	n/a	n/a

The position of the apparatus shown on this plan is given without obligation and warranty, and the accuracy cannot be guaranteed. Service pipes are not shown but their presence should be anticipated. No liability of any kind whatsoever is accepted by Thames Water for any error or omission. The actual position of mains and services must be verified and established on site before any works are undertaken.

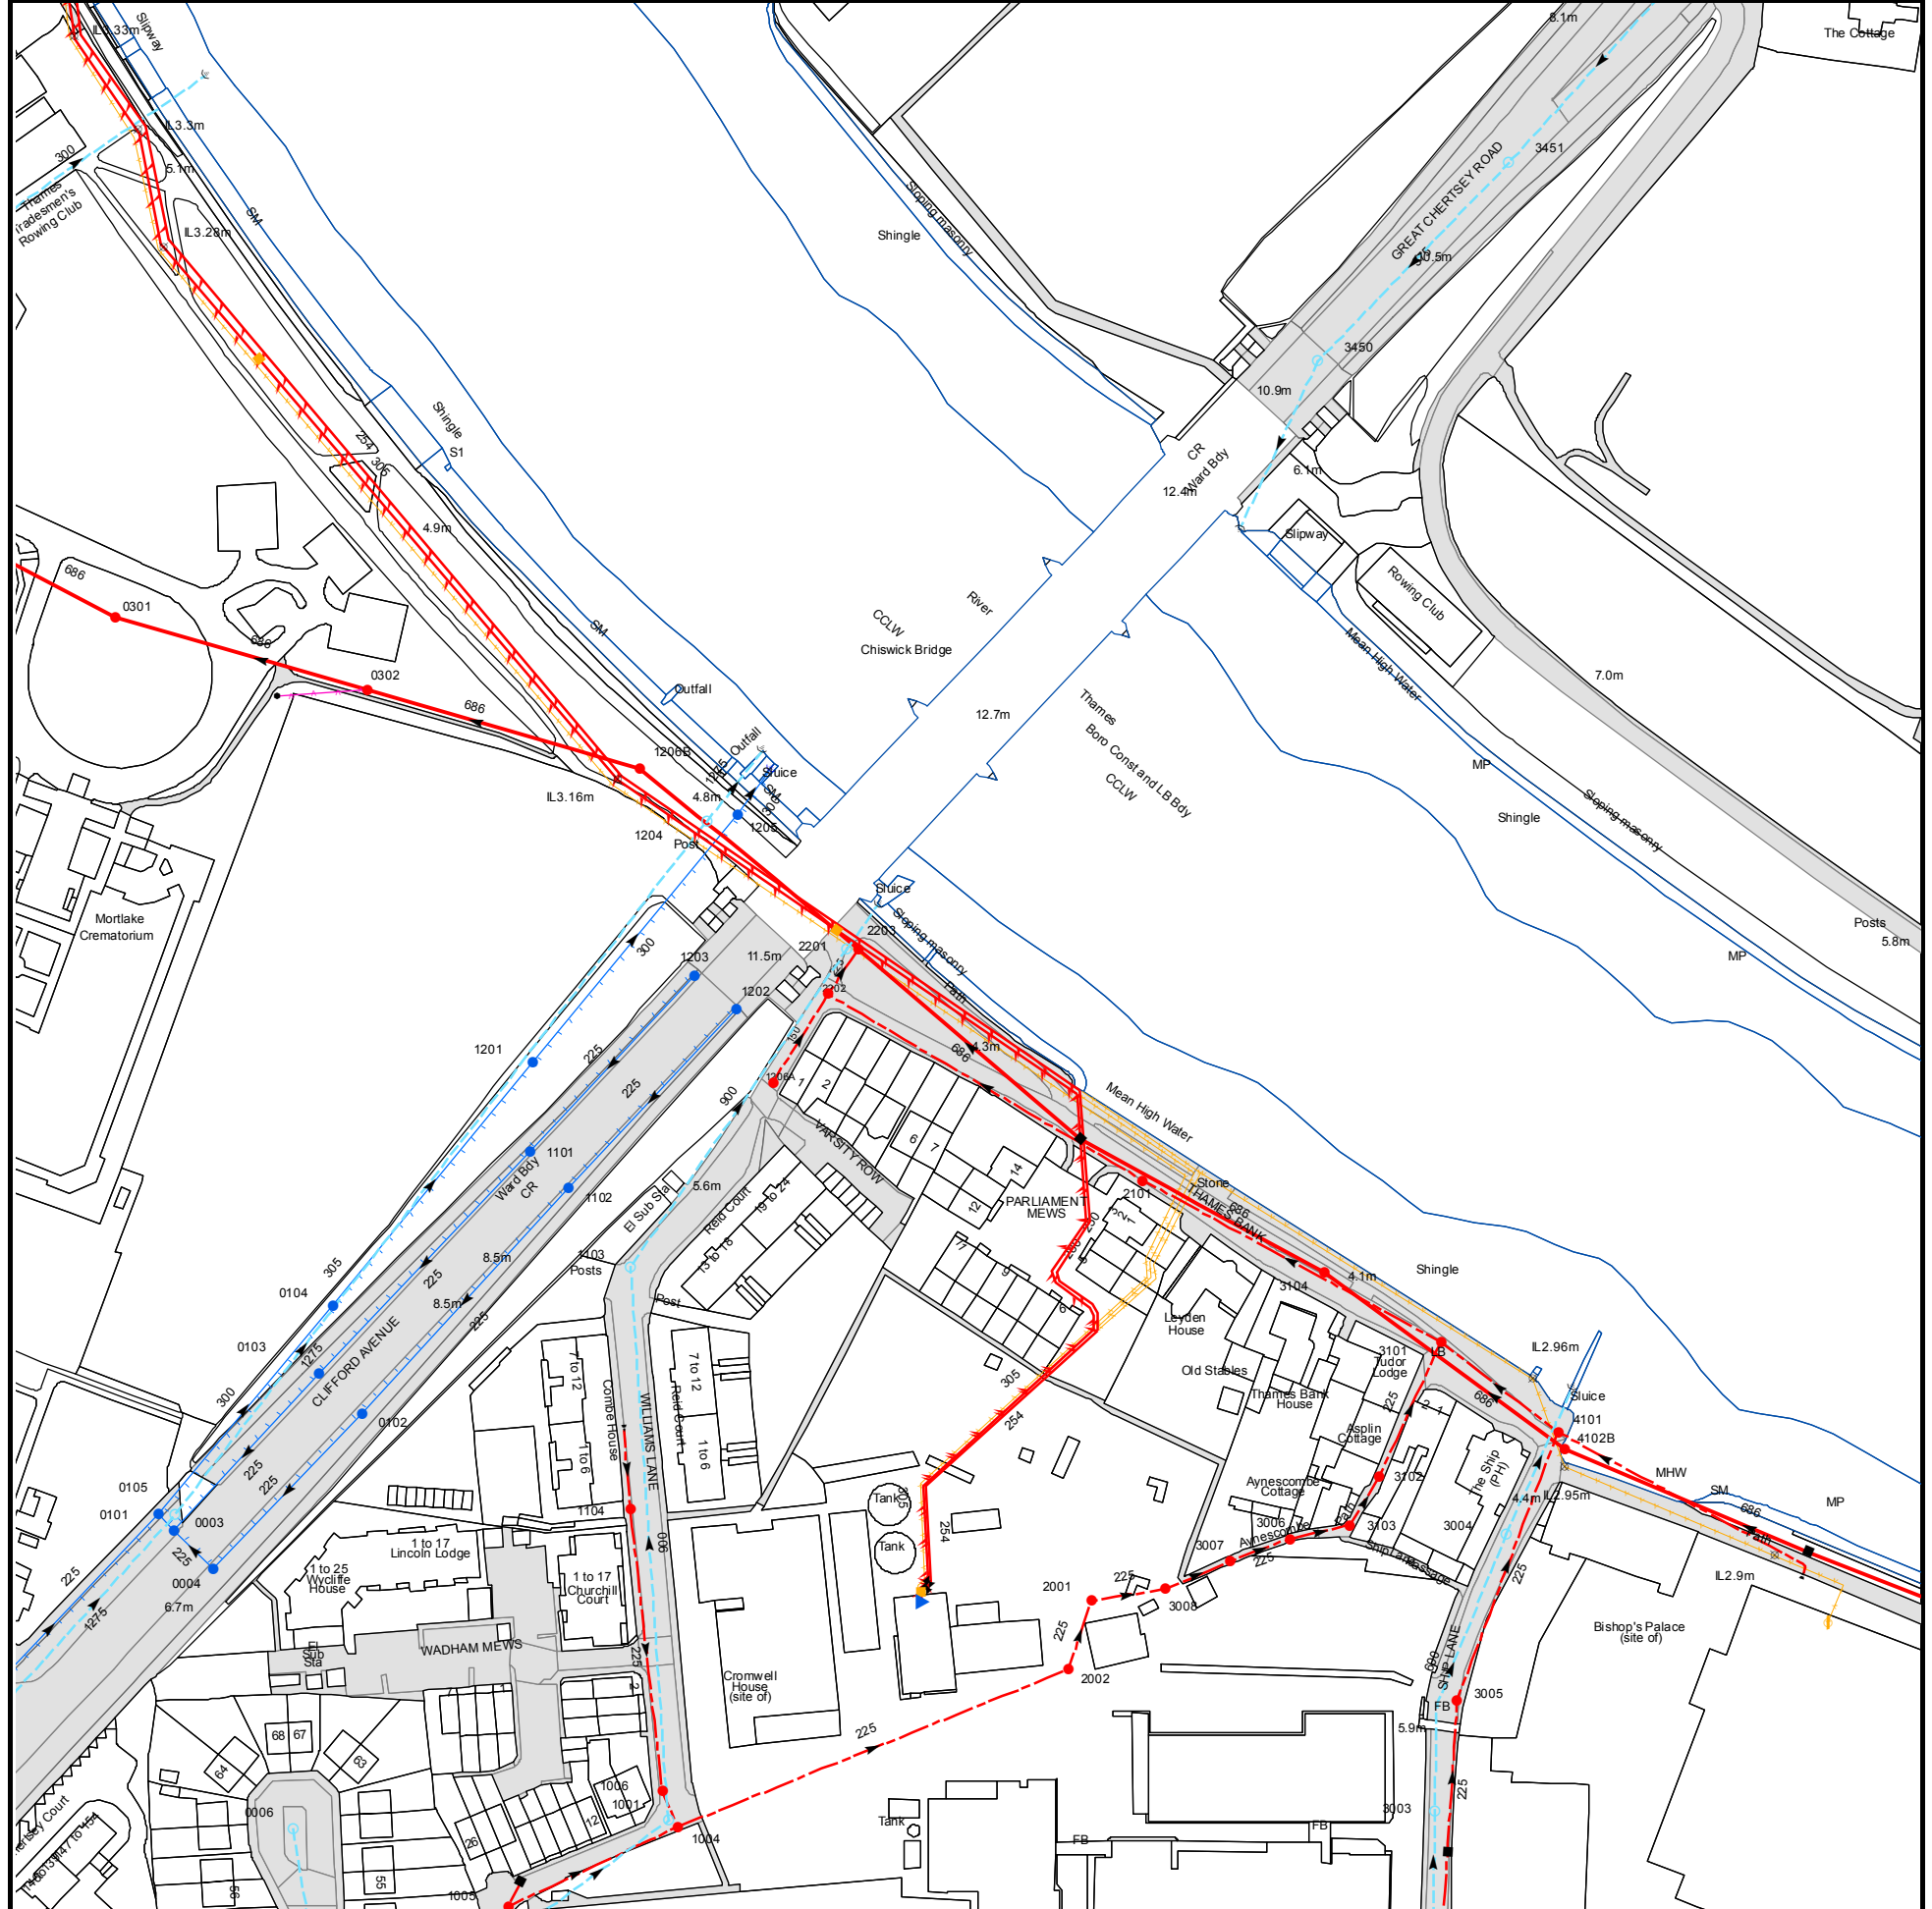

The width of the displayed area is 500m and the centre of the map is located at OS coordinates 520250,176250

The position of the apparatus shown on this plan is given without obligation and warranty, and the accuracy cannot be guaranteed. Service pipes are not shown but their presence should be anticipated. No liability of any kind whatsoever is accepted by Thames Water for any error or omission. The actual position of mains and services must be verified and established on site before any works are undertaken.

Based on the Ordnance Survey Map with the Sanction of the controller of H.M. Stationery Office, License no. 100019345 Crown Copyright Reserved.

NB. Levels quoted in metres Ordnance Newlyn Datum. The value -9999.00 indicates that no survey information is available

Manhole Reference	Manhole Cover Level	Manhole Invert Level
3103	6.12	1.37
1104	5.93	4.19
3102	5.77	1.35
4102B	n/a	-4.73
4101	3.47	1.08
0102	n/a	n/a
0103	n/a	n/a
3101	4.14	.92
0104	n/a	n/a
3104	n/a	-4.82
1103	5.88	1.73
1102	n/a	n/a
2101	n/a	n/a
1101	n/a	n/a
1206A	5.06	4
1201	n/a	n/a
1202	n/a	n/a
2202	4.53	.29
1203	n/a	n/a
2201	n/a	n/a
2203	n/a	-4.99
1204	n/a	n/a
1205	4.62	2.02
1206B	n/a	-5.07
0302	n/a	-5.16
3450	10.79	1.9
3451	9.23	2.01
0003	n/a	n/a
0105	n/a	n/a
0101	n/a	n/a
0301	n/a	-5.24
2002	n/a	n/a
2001	n/a	n/a
3008	n/a	n/a
3007	6.65	1.7
3006	6.59	1.59
3003	6.06	2.01
3005	5.56	1.22
3004	4.81	1.77
0004	n/a	n/a
0006	5.52	4.54
1005	6.3	3.66
1006	6.3	1.96
1001	6.3	1.96
1004	6.26	2.79

The position of the apparatus shown on this plan is given without obligation and warranty, and the accuracy cannot be guaranteed. Service pipes are not shown but their presence should be anticipated. No liability of any kind whatsoever is accepted by Thames Water for any error or omission. The actual position of mains and services must be verified and established on site before any works are undertaken.



The width of the displayed area is 500m and the centre of the map is located at OS coordinates 520750,175750

The position of the apparatus shown on this plan is given without obligation and warranty, and the accuracy cannot be guaranteed. Service pipes are not shown but their presence should be anticipated. No liability of any kind whatsoever is accepted by Thames Water for any error or omission. The actual position of mains and services must be verified and established on site before any works are undertaken.

Based on the Ordnance Survey Map with the Sanction of the controller of H.M. Stationery Office, License no. 100019345 Crown Copyright Reserved.

NB. Levels quoted in metres Ordnance Newlyn Datum. The value -9999.00 indicates that no survey information is available


Manhole Reference	Manhole Cover Level	Manhole Invert Level
96MD	n/a	n/a
971E	n/a	n/a
96LF	n/a	n/a
96LE	n/a	n/a
96LL	n/a	n/a
96LM	n/a	n/a
96LN	n/a	n/a
96MC	n/a	n/a
96ME	n/a	n/a
9710	6.67	4.13
971F	n/a	n/a
9707	6.64	2.63
96LK	n/a	n/a
9601	6.12	2.72
97MJ	n/a	n/a
9609	6.31	4.48
9602	6.33	2.85
96KN	n/a	n/a
97MK	n/a	n/a
96KF	n/a	n/a
97MN	n/a	n/a
96LD	n/a	n/a
96LC	n/a	n/a
971G	n/a	n/a
851C	n/a	n/a
851D	n/a	n/a
851A	n/a	n/a
8503	6.32	4.8
8513	6.29	5.27
951D	n/a	n/a
951B	n/a	n/a
951C	n/a	n/a
961B	n/a	n/a
95NC	n/a	n/a
9603	6.17	4.47
9608	6.18	4.65
9604	6.14	4.4
9507	5.96	4.66
9510	5.92	4.84
95HH	n/a	n/a
951A	n/a	n/a
96NM	n/a	n/a
95HJ	n/a	n/a
9511	5.91	4.65
9501	6.01	2.93
95JC	n/a	n/a
8804	5.61	4.52
88MF	n/a	n/a
8801	5.95	2.33
88LM	n/a	n/a
88MK	n/a	n/a
88MM	n/a	n/a
88MN	n/a	n/a
8709	6.12	3.86
88MH	n/a	n/a
8705	6.09	2.51
88LN	n/a	n/a
9806	5.91	4.13
9805	5.91	3.33
9708	6.06	3.86
9702	6.14	2.54
9703	6.11	n/a
9709	5.94	4.62
9804	5.62	4.66
98KJ	n/a	n/a
98KE	n/a	n/a
98KC	n/a	n/a
9802	5.7	3.13
9801	5.44	2.75
8802	5.62	2.12
8910	5.9	4.51
8903	5.91	3.91
99MM	n/a	n/a
99MN	n/a	n/a
9905	5.4	4.49
891B	n/a	n/a
9902	5.43	n/a
9901	5.71	2.13
89ND	n/a	n/a
89NE	n/a	n/a
861A	n/a	n/a
871A	n/a	n/a
861C	n/a	n/a
861D	n/a	n/a
8711	6.83	4.51
8704	6.85	4.1
8701	6.37	4.24
87NH	n/a	n/a
8601	6.19	4.92
8611	6.14	4.94
97MM	n/a	n/a

Manhole Reference	Manhole Cover Level	Manhole Invert Level
96MJ	n/a	n/a
96MK	n/a	n/a
961C	n/a	n/a
96ML	n/a	n/a
96MM	n/a	n/a
961A	n/a	n/a
971A	n/a	n/a
97MF	n/a	n/a
9605	6.24	5
971B	n/a	n/a
96KL	n/a	n/a
971C	n/a	n/a
971D	n/a	n/a
97MD	n/a	n/a
96KJ	n/a	n/a
96LH	n/a	n/a
7709	6.39	3.48
7706	6.29	3.83
77MK	n/a	n/a
77NF	n/a	n/a
77NC	n/a	n/a
77NH	n/a	n/a
7602	6.24	4.7
7601	6.39	4.58
7704	6.45	4.56
77MN	n/a	n/a
7703	6.89	4.35
7713	6.37	4.63
77KN	n/a	n/a
7621	n/a	n/a
7610	n/a	n/a
77MC	n/a	n/a
7708	6.18	3.64
7701	6.1	3.73
761A	n/a	n/a
761B	n/a	n/a
771A	n/a	n/a
8707	6.77	4.33
8706	6.16	1.91
8708	6.38	4.35
8602	6.35	4.39
8710	6.83	4.66
861B	n/a	n/a
7917	5.32	2.72
7916	5.32	2.75
7915	5.31	2.8
7910	n/a	2.98
7914	5.41	2.87
7913	5.07	3.02
7901	4.94	1.5
7904	5.06	2.39
7919	n/a	n/a
7805	n/a	n/a
7911	5.13	3.41
7918	5.14	2.67
791B	n/a	n/a
791A	n/a	n/a
7905	5.32	2.96
7912	5.21	3.71
781A	n/a	n/a
791C	n/a	n/a
781B	n/a	n/a
7902	5.37	1.76
7906	5.76	3.88
8911	n/a	n/a
8909	5.67	4.34
8904	5.68	2.08
8908	5.52	3.96
8905	5.55	1.97
891C	n/a	n/a
8901	5.61	1.86
7613	6.53	4.74
7614	6.39	5.01
8606	6.3	4.55
861E	n/a	n/a
7615	n/a	n/a
7604	n/a	n/a
66NH	n/a	n/a
66NL	n/a	n/a
8605	6.32	2.1
7605	n/a	n/a
8604	6.3	4.52
7606	n/a	n/a
7616	n/a	n/a
8610	6.29	4.09
7617	n/a	n/a
7618	6.11	5.01
76JF	n/a	n/a
76HC	n/a	n/a
7607	6.16	5.12
76MJ	n/a	n/a
7619	6.37	4.27
7608	n/a	n/a

Manhole Reference	Manhole Cover Level	Manhole Invert Level
8603	6.25	4.44
8609	6.27	4.84
7622	n/a	n/a
7609	n/a	n/a
7620	6.3	4.27
6520	6.28	4.78
6506	6.31	5.29
65LM	n/a	n/a
65MK	n/a	n/a
65MM	n/a	n/a
65NE	n/a	n/a
65NC	n/a	n/a
6511	n/a	n/a
6512	n/a	n/a
7612	6.38	4.92
75NG	n/a	n/a
75NF	n/a	n/a
751B	n/a	n/a
75NH	n/a	n/a
7511	6.4	4.85
7510	6.39	4.86
7508	6.1	5.05
75NM	n/a	n/a
7507	6.51	5.34
75NL	n/a	n/a
77LF	n/a	n/a
6808	5.94	4.75
68LJ	n/a	n/a
78KN	n/a	n/a
6809	5.95	3.03
78LH	n/a	n/a
68JM	n/a	n/a
68JC	n/a	n/a
68LL	n/a	n/a
68MD	n/a	n/a
68JF	n/a	n/a
68JD	n/a	n/a
7804	n/a	n/a
7802	5.84	3.2
68MF	n/a	n/a
78NM	n/a	n/a
78ML	n/a	n/a
7801	5.67	3.09
7803	5.69	3.92
68LC	n/a	n/a
68KH	n/a	n/a
78ME	n/a	n/a
78NF	n/a	n/a
68ND	n/a	n/a
7806	n/a	n/a
6807	5.66	4.37
68MN	n/a	n/a
6907	5.38	2.03
69NK	n/a	n/a
68NH	n/a	n/a
6912	4.72	2.17
68MM	n/a	n/a
681B	n/a	n/a
68ML	n/a	n/a
6914	5.5	1.63
6915	5.27	1.67
6913	4.82	1.52
6917	4.57	1.51
69NC	n/a	n/a
6806	5.34	2.58
6918	4.6	1.82
6919	4.82	2.06
6805	5.36	3.72
6903	4.71	1.07
6803	5.3	3.44
6920	4.9	2.26
6921	4.91	3.31
6804	5.26	2.5
6908	4.96	2.33
68NM	n/a	n/a
78LM	n/a	n/a
7909	4.94	2.63
6707	6.05	4.43
6704	6.04	4.24
67KL	n/a	n/a
67LF	n/a	n/a
67LD	n/a	n/a
6703	5.93	4.58
67MJ	n/a	n/a
67ML	n/a	n/a
6708	5.92	4.26
6706	6.73	3.34
67MH	n/a	n/a
67MK	n/a	n/a
7712	6.05	3.64
77LH	n/a	n/a
77LK	n/a	n/a
7705	6.46	1.76

Manhole Reference	Manhole Cover Level	Manhole Invert Level
77LE	n/a	n/a
7710	6.73	3.44
7702	6.75	4.27
7711	6.78	4.67
76HK	n/a	n/a
76FF	n/a	n/a
7611	5.99	4.16
76FH	n/a	n/a
76NL	n/a	n/a
76NM	n/a	n/a
7603	6.02	4.9
65NM	n/a	n/a
55JL	n/a	n/a
6501	n/a	n/a
55JK	n/a	n/a
65KE	n/a	n/a
66LD	n/a	n/a
66LF	n/a	n/a
6604	6.22	5.14
6605	6.21	5.01
66LE	n/a	n/a
6606	6.26	4.81
6601	n/a	n/a
66LK	n/a	n/a
66LN	n/a	n/a
6608	n/a	n/a
66LJ	n/a	n/a
66LM	n/a	n/a
6602	n/a	n/a
6609	6.09	4.68
6603	6.08	4.75
6607	6.03	3.82
66ND	n/a	n/a
66LH	n/a	n/a
66LL	n/a	n/a
66MM	n/a	n/a
661B	n/a	n/a
661A	n/a	n/a
5514	6.58	5.12
55MN	n/a	n/a
65NL	n/a	n/a
65JJ	n/a	n/a
65JE	n/a	n/a
65HN	n/a	n/a
65HK	n/a	n/a
651B	n/a	n/a
6514	n/a	n/a
65HF	n/a	n/a
65KC	n/a	n/a
65JD	n/a	n/a
65HM	n/a	n/a
6516	6.27	5.28
65HJ	n/a	n/a
651A	n/a	n/a
6503	6.31	4.79
65HE	n/a	n/a
6515	6.33	5.14
6504	n/a	n/a
6521	6.31	4.13
6518	6.37	5.51
6505	6.36	4.54
6519	6.32	4.23
65KK	n/a	n/a
65LC	n/a	n/a
65LF	n/a	n/a
65MD	n/a	n/a
57NH	n/a	n/a
5803	n/a	1.33
5705	n/a	n/a
58LK	n/a	n/a
5704	6.83	3.79
581A	n/a	n/a
5718	6.57	5.16
5804	6.28	1.37
5717	6.88	4.38
57ML	n/a	n/a
5808	6.27	5.43
5806	6.21	4.15
5710	6.2	1.5
5712	6.26	5.22
5713	6.04	4.5
5706	6.04	3.81
67NM	n/a	n/a

The position of the apparatus shown on this plan is given without obligation and warranty, and the accuracy cannot be guaranteed. Service pipes are not shown but their presence should be anticipated. No liability of any kind whatsoever is accepted by Thames Water for any error or omission. The actual position of mains and services must be verified and established on site before any works are undertaken.

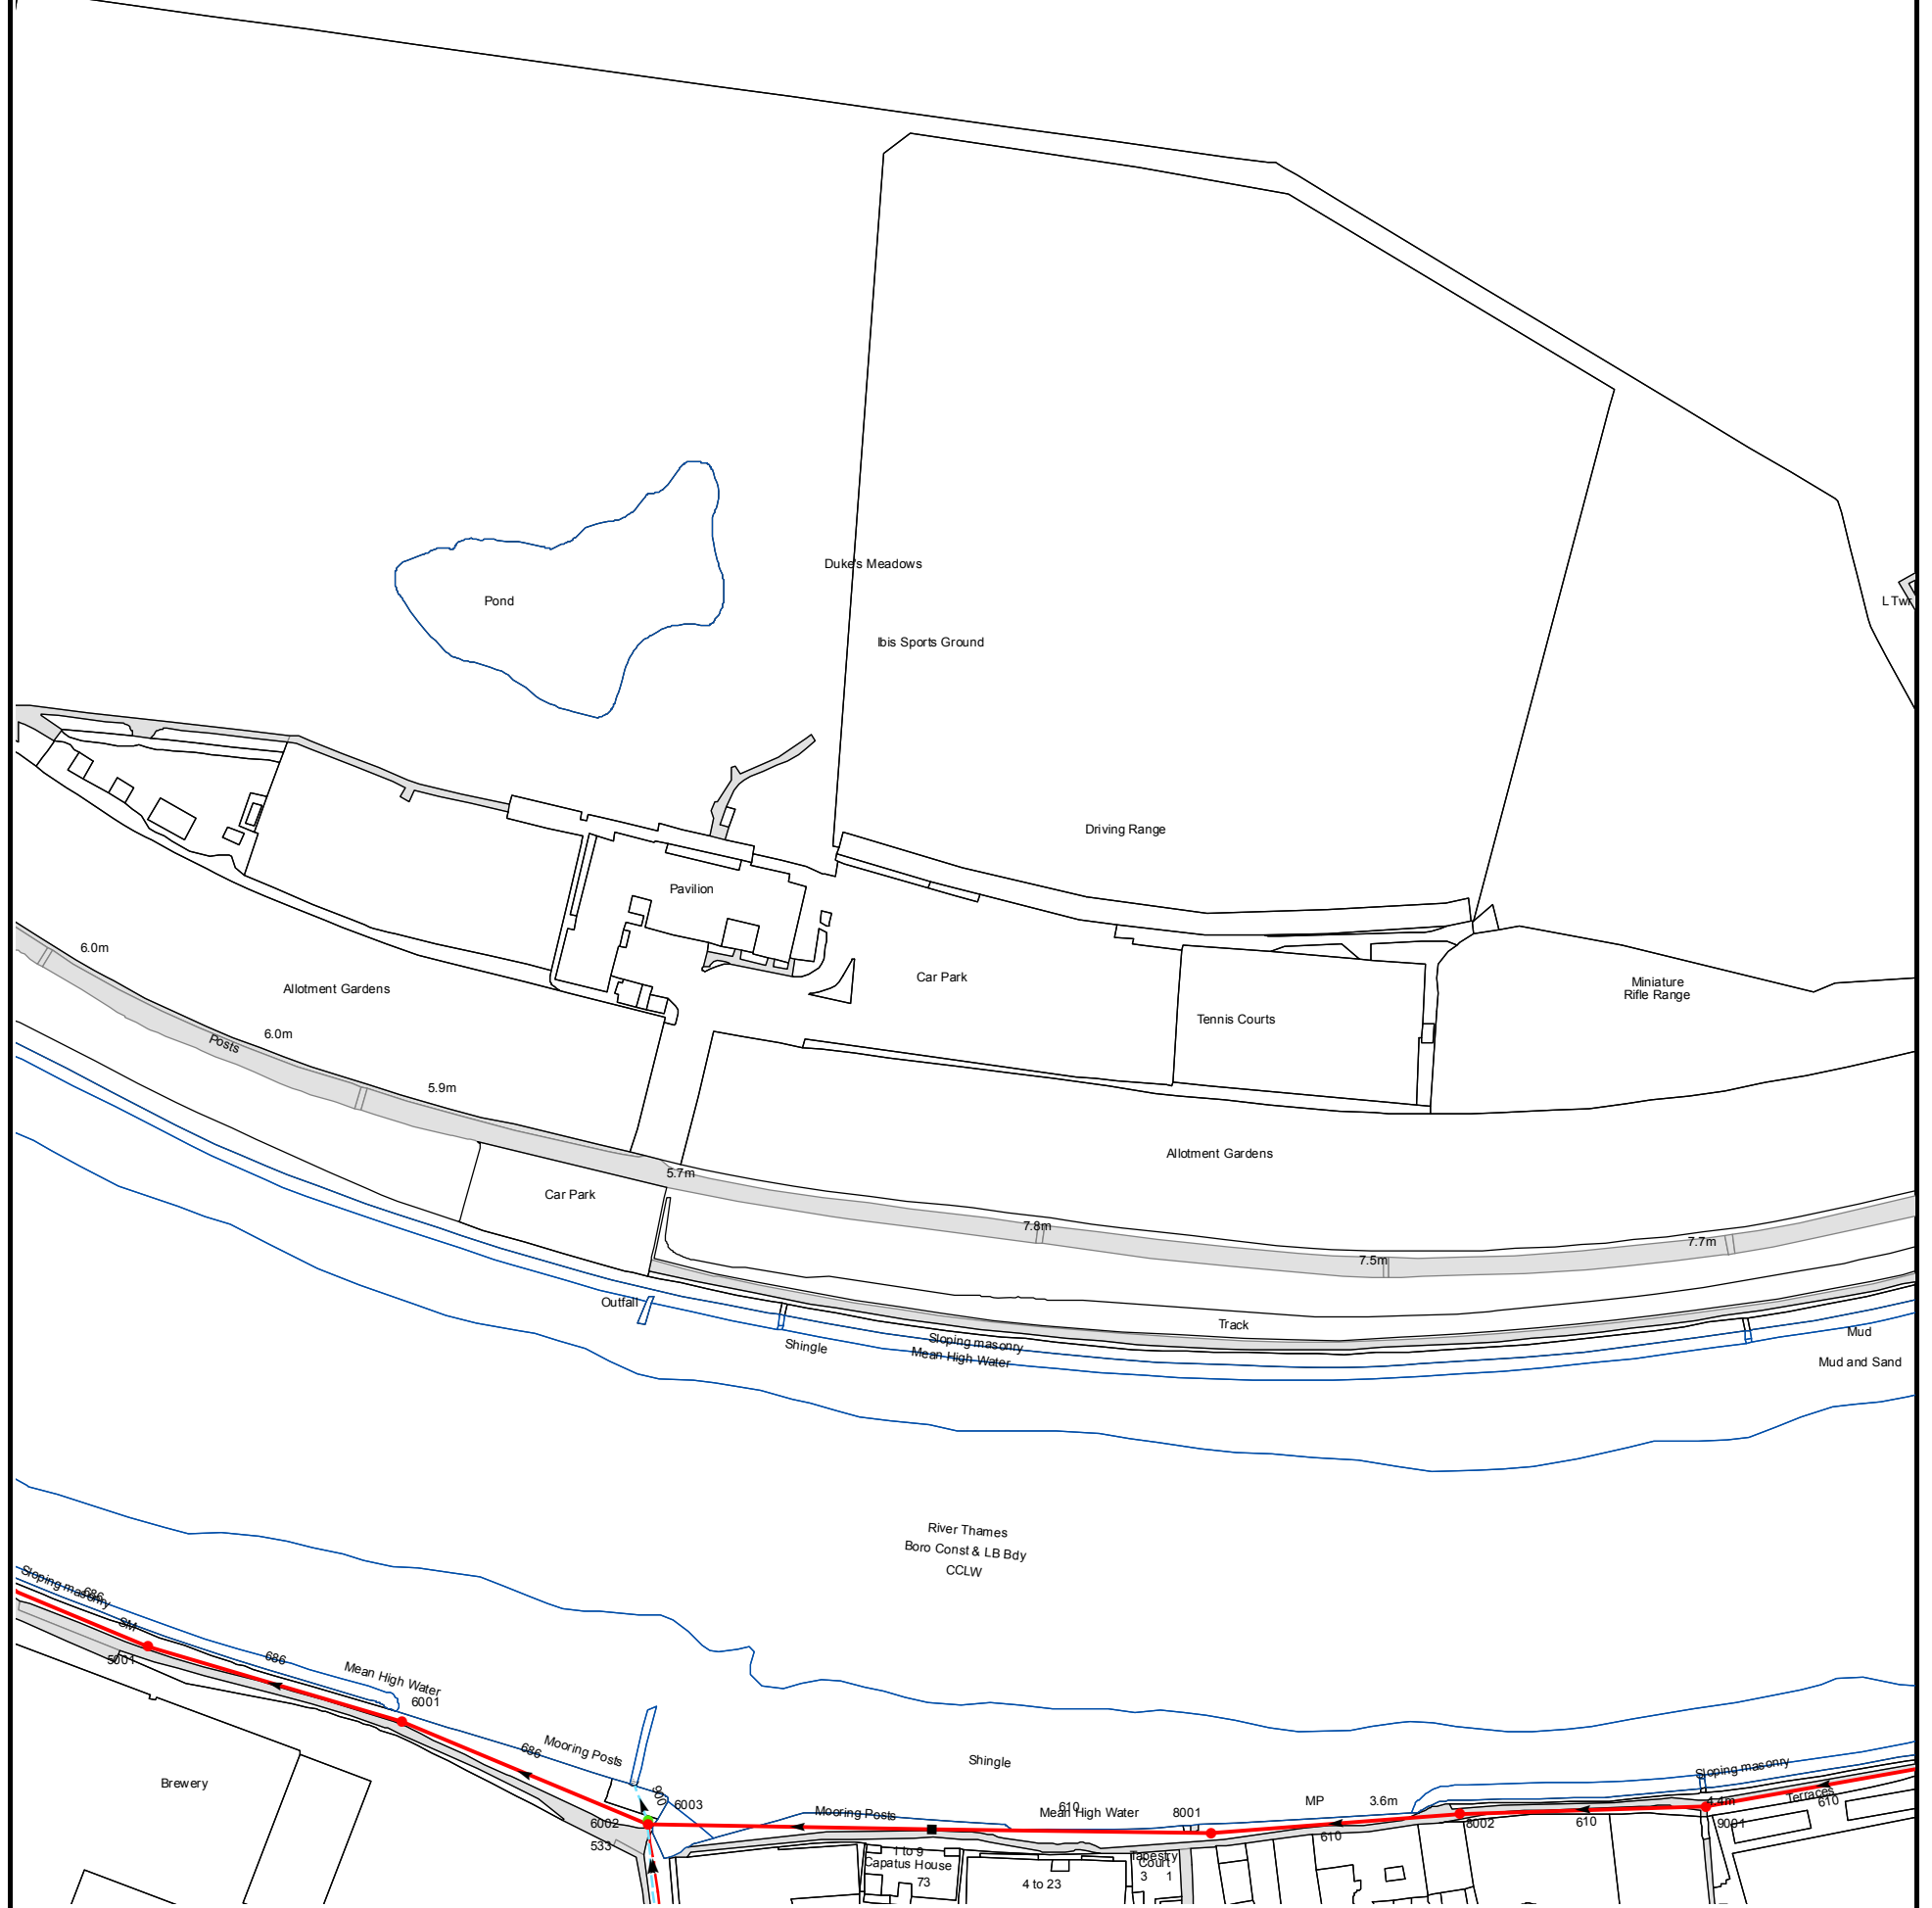

The width of the displayed area is 500m and the centre of the map is located at OS coordinates 520750,176250
The position of the apparatus shown on this plan is given without obligation and warranty, and the accuracy cannot be guaranteed. Service pipes are not shown but their presence should be anticipated. No liability of any kind whatsoever is accepted by Thames Water for any error or omission. The actual position of mains and services must be verified and established on site before any works are undertaken.

Based on the Ordnance Survey Map with the Sanction of the controller of H.M. Stationery Office, License no. 100019345 Crown Copyright Reserved.

NB. Levels quoted in metres Ordnance Newlyn Datum. The value -9999.00 indicates that no survey information is available



















Manhole Reference	Manhole Cover Level	Manhole Invert Level
8002	n/a	-4.15
9001	n/a	-4.06
8001	n/a	-4.23
6003	3.64	.92
6002	n/a	-4.41
6001	n/a	-4.49
5001	n/a	-4.57

The position of the apparatus shown on this plan is given without obligation and warranty, and the accuracy cannot be guaranteed. Service pipes are not shown but their presence should be anticipated. No liability of any kind whatsoever is accepted by Thames Water for any error or omission. The actual position of mains and services must be verified and established on site before any works are undertaken.








ALS Sewer Map Key

Public Sewer Types (Operated & Maintained by Thames Water)

-  **Foul:** A sewer designed to convey waste water from domestic and industrial sources to a treatment works.
-  **Surface Water:** A sewer designed to convey surface water (e.g. rain water from roofs, yards and car parks) to rivers or watercourses.
-  **Combined:** A sewer designed to convey both waste water and surface water from domestic and industrial sources to a treatment works.
-  Trunk Surface Water
-  Trunk Foul
-  Storm Relief
-  Trunk Combined
-  Vent Pipe
-  Bio-solids (Sludge)
-  Proposed Thames Surface Water Sewer
-  Proposed Thames Water Foul Sewer
-  Gallery
-  Foul Rising Main
-  Surface Water Rising Main
-  Combined Rising Main
-  Sludge Rising Main
-  Proposed Thames Water Rising Main
-  Vacuum





Sewer Fittings

A feature in a sewer that does not affect the flow in the pipe. Example: a vent is a fitting as the function of a vent is to release excess gas.

-  Air Valve
-  Dam Chase
-  Fitting
-  Meter
-  Vent Column




Operational Controls

A feature in a sewer that changes or diverts the flow in the sewer. Example: A hydrobrake limits the flow passing downstream.

-  Control Valve
-  Drop Pipe
-  Ancillary
-  Weir





End Items

End symbols appear at the start or end of a sewer pipe. Examples: an Undefined End at the start of a sewer indicates that Thames Water has no knowledge of the position of the sewer upstream of that symbol, Outfall on a surface water sewer indicates that the pipe discharges into a stream or river.

-  Outfall
-  Undefined End
-  Inlet






Other Symbols

Symbols used on maps which do not fall under other general categories








-  Public/Private Pumping Station
-  Change of characteristic indicator (C.O.C.I.)
-  Invert Level
-  Summit

Areas

Lines denoting areas of underground surveys, etc.

-  Agreement
-  Operational Site
-  Chamber
-  Tunnel
-  Conduit Bridge

Other Sewer Types (Not Operated or Maintained by Thames Water)

-  Foul Sewer
-  Surface Water Sewer
-  Combined Sewer
-  Gully
-  Culverted Watercourse
-  Proposed
-  Abandoned Sewer

Notes:


- 1) All levels associated with the plans are to Ordnance Datum Newlyn.
- 2) All measurements on the plans are metric.
- 3) Arrows (on gravity fed sewers) or flecks (on rising mains) indicate direction of flow.
- 4) Most private pipes are not shown on our plans, as in the past, this information has not been recorded.
- 5) 'na' or '0' on a manhole level indicates that data is unavailable.
- 6) The text appearing alongside a sewer line indicates the internal diameter of the pipe in millimetres. Text next to a manhole indicates the manhole reference number and should not be taken as a measurement. If you are unsure about any text or symbology present on the plan, please contact a member of Property Insight on 0845 070 9148.



The width of the displayed area is 500m and the centre of the map is located at OS coordinates 520250,175750


The position of the apparatus shown on this plan is given without obligation and warranty, and the accuracy cannot be guaranteed. Service pipes are not shown but their presence should be anticipated. No liability of any kind whatsoever is accepted by Thames Water for any error or omission. The actual position of mains and services must be verified and established on site before any works are undertaken.

Based on the Ordnance Survey Map with the Sanction of the controller of H.M. Stationery Office, License no. 100019345 Crown Copyright Reserved.

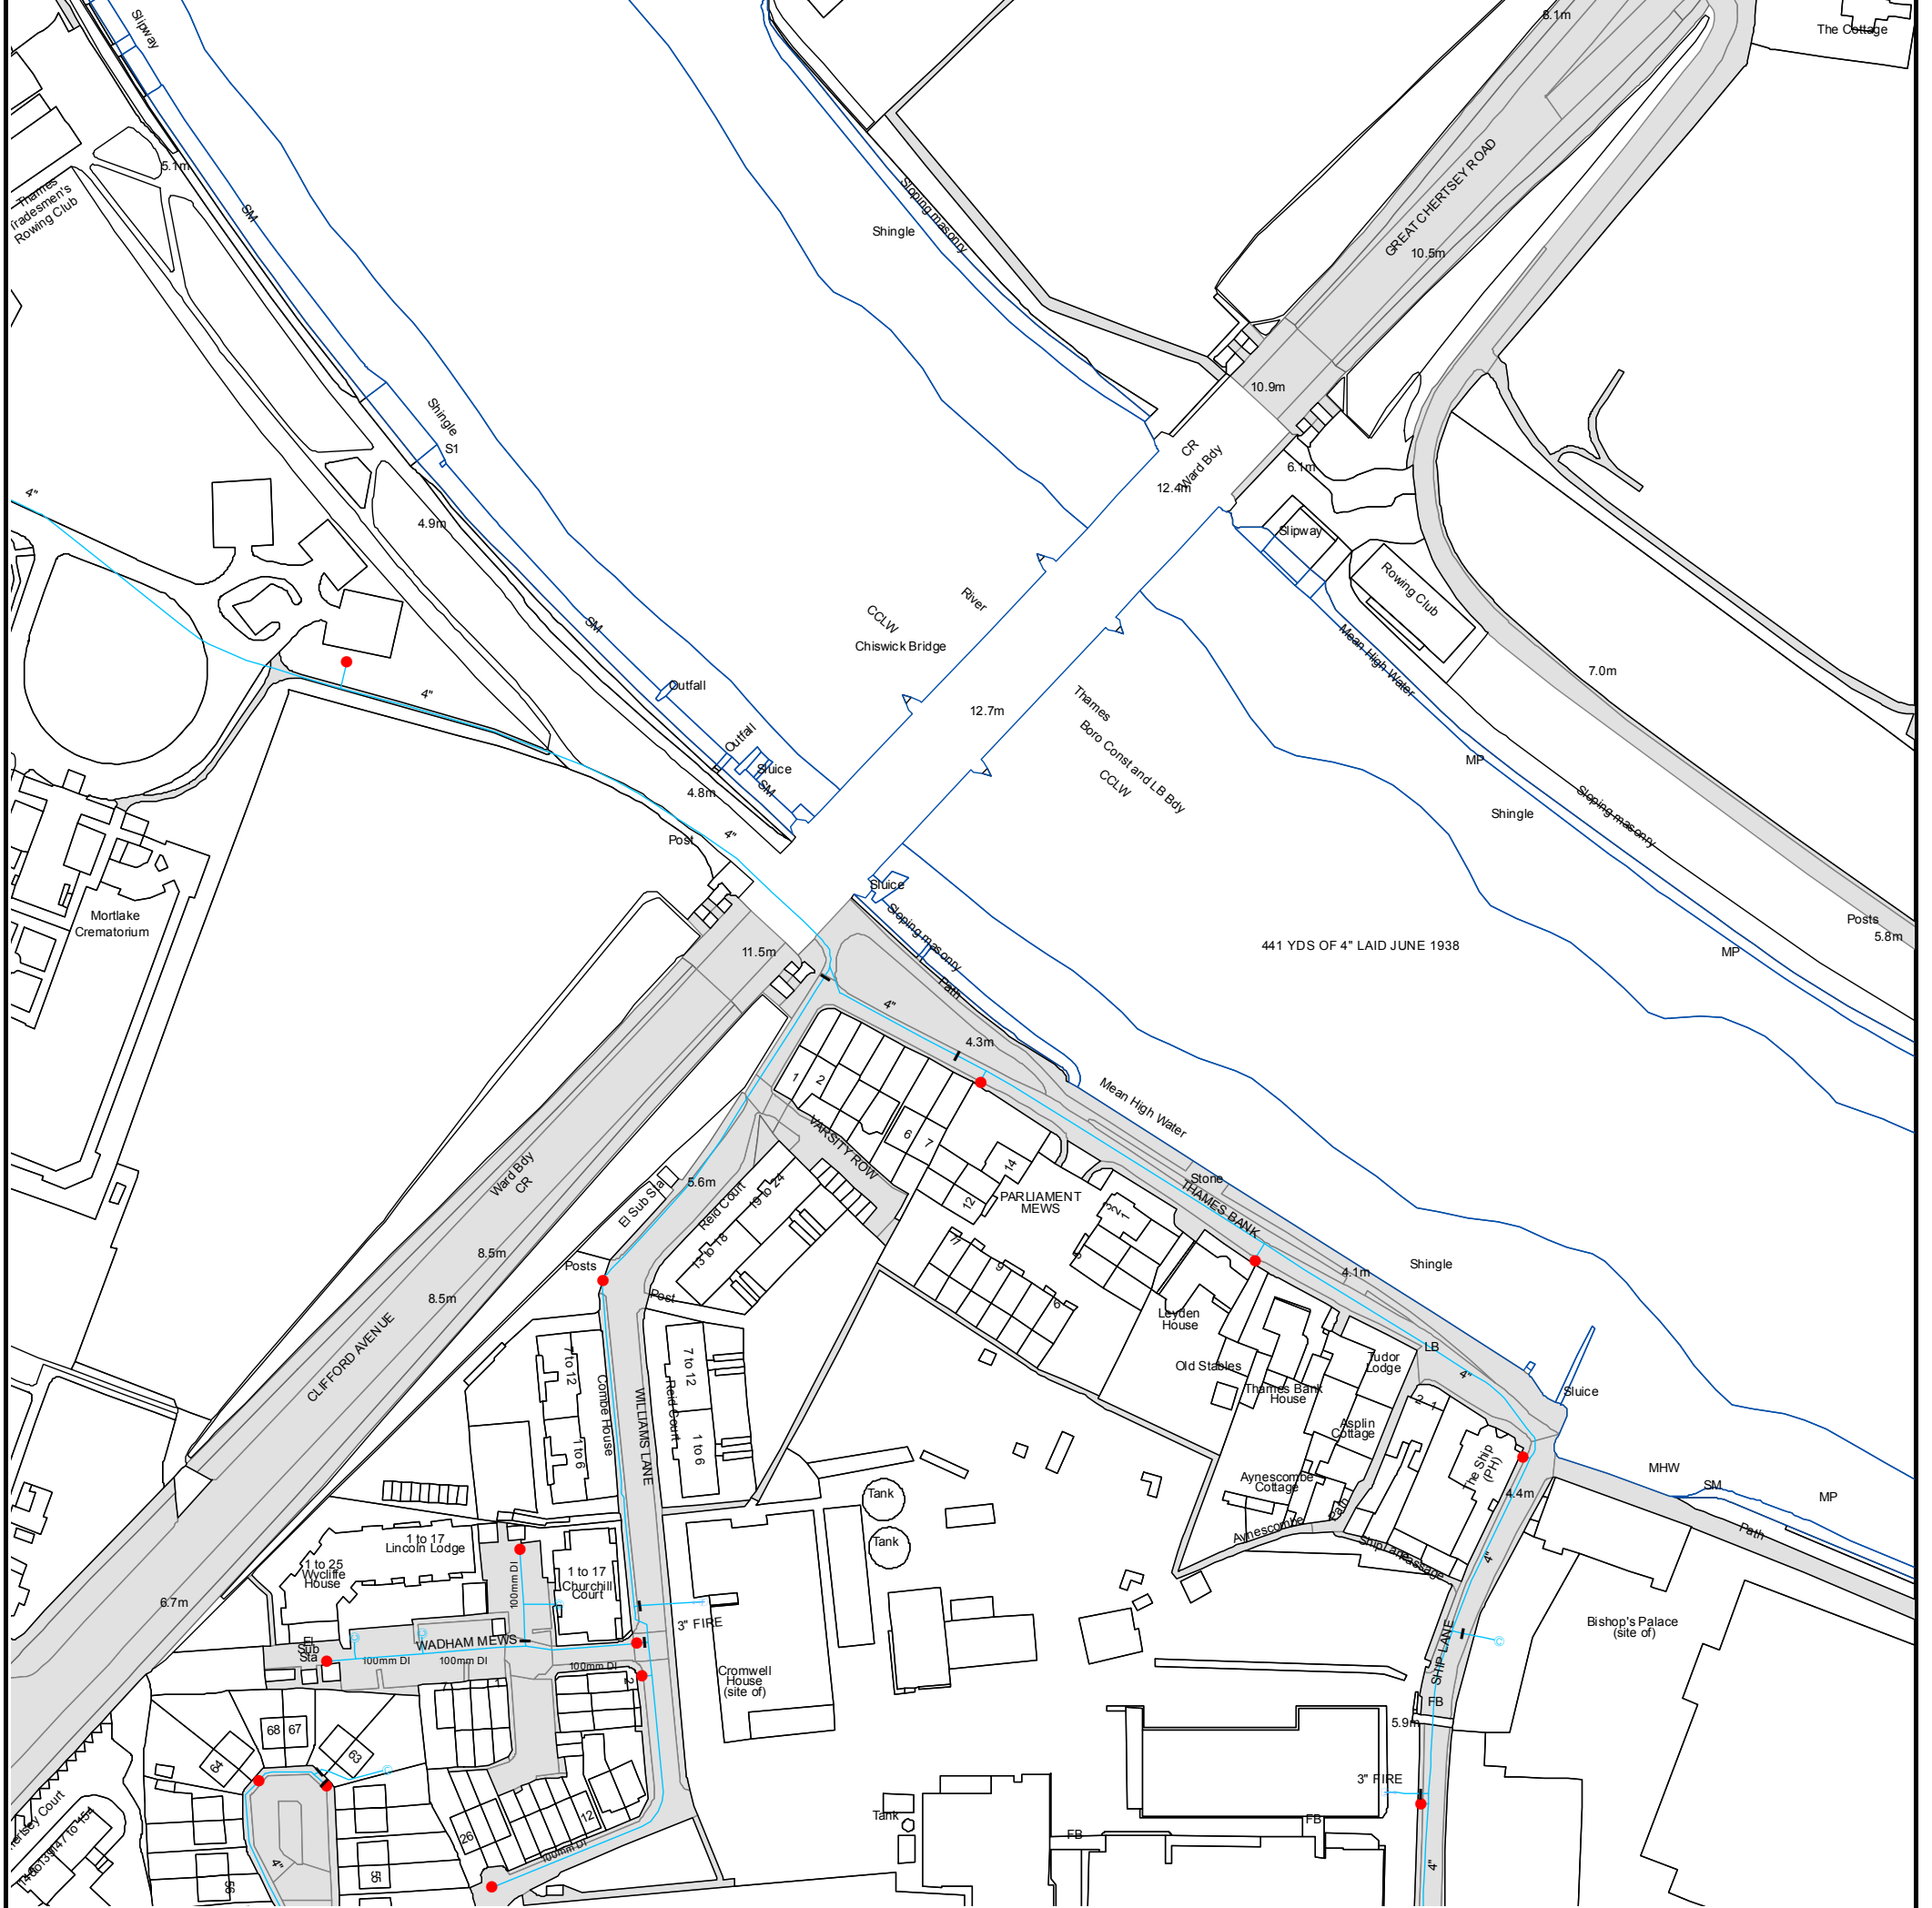

The width of the displayed area is 500m and the centre of the map is located at OS coordinates 520250,176250
 The position of the apparatus shown on this plan is given without obligation and warranty, and the accuracy cannot be guaranteed. Service pipes are not shown but their presence should be anticipated. No liability of any kind whatsoever is accepted by Thames Water for any error or omission. The actual position of mains and services must be verified and established on site before any works are undertaken.

Based on the Ordnance Survey Map with the Sanction of the controller of H.M. Stationery Office, License no. 100019345 Crown Copyright Reserved.

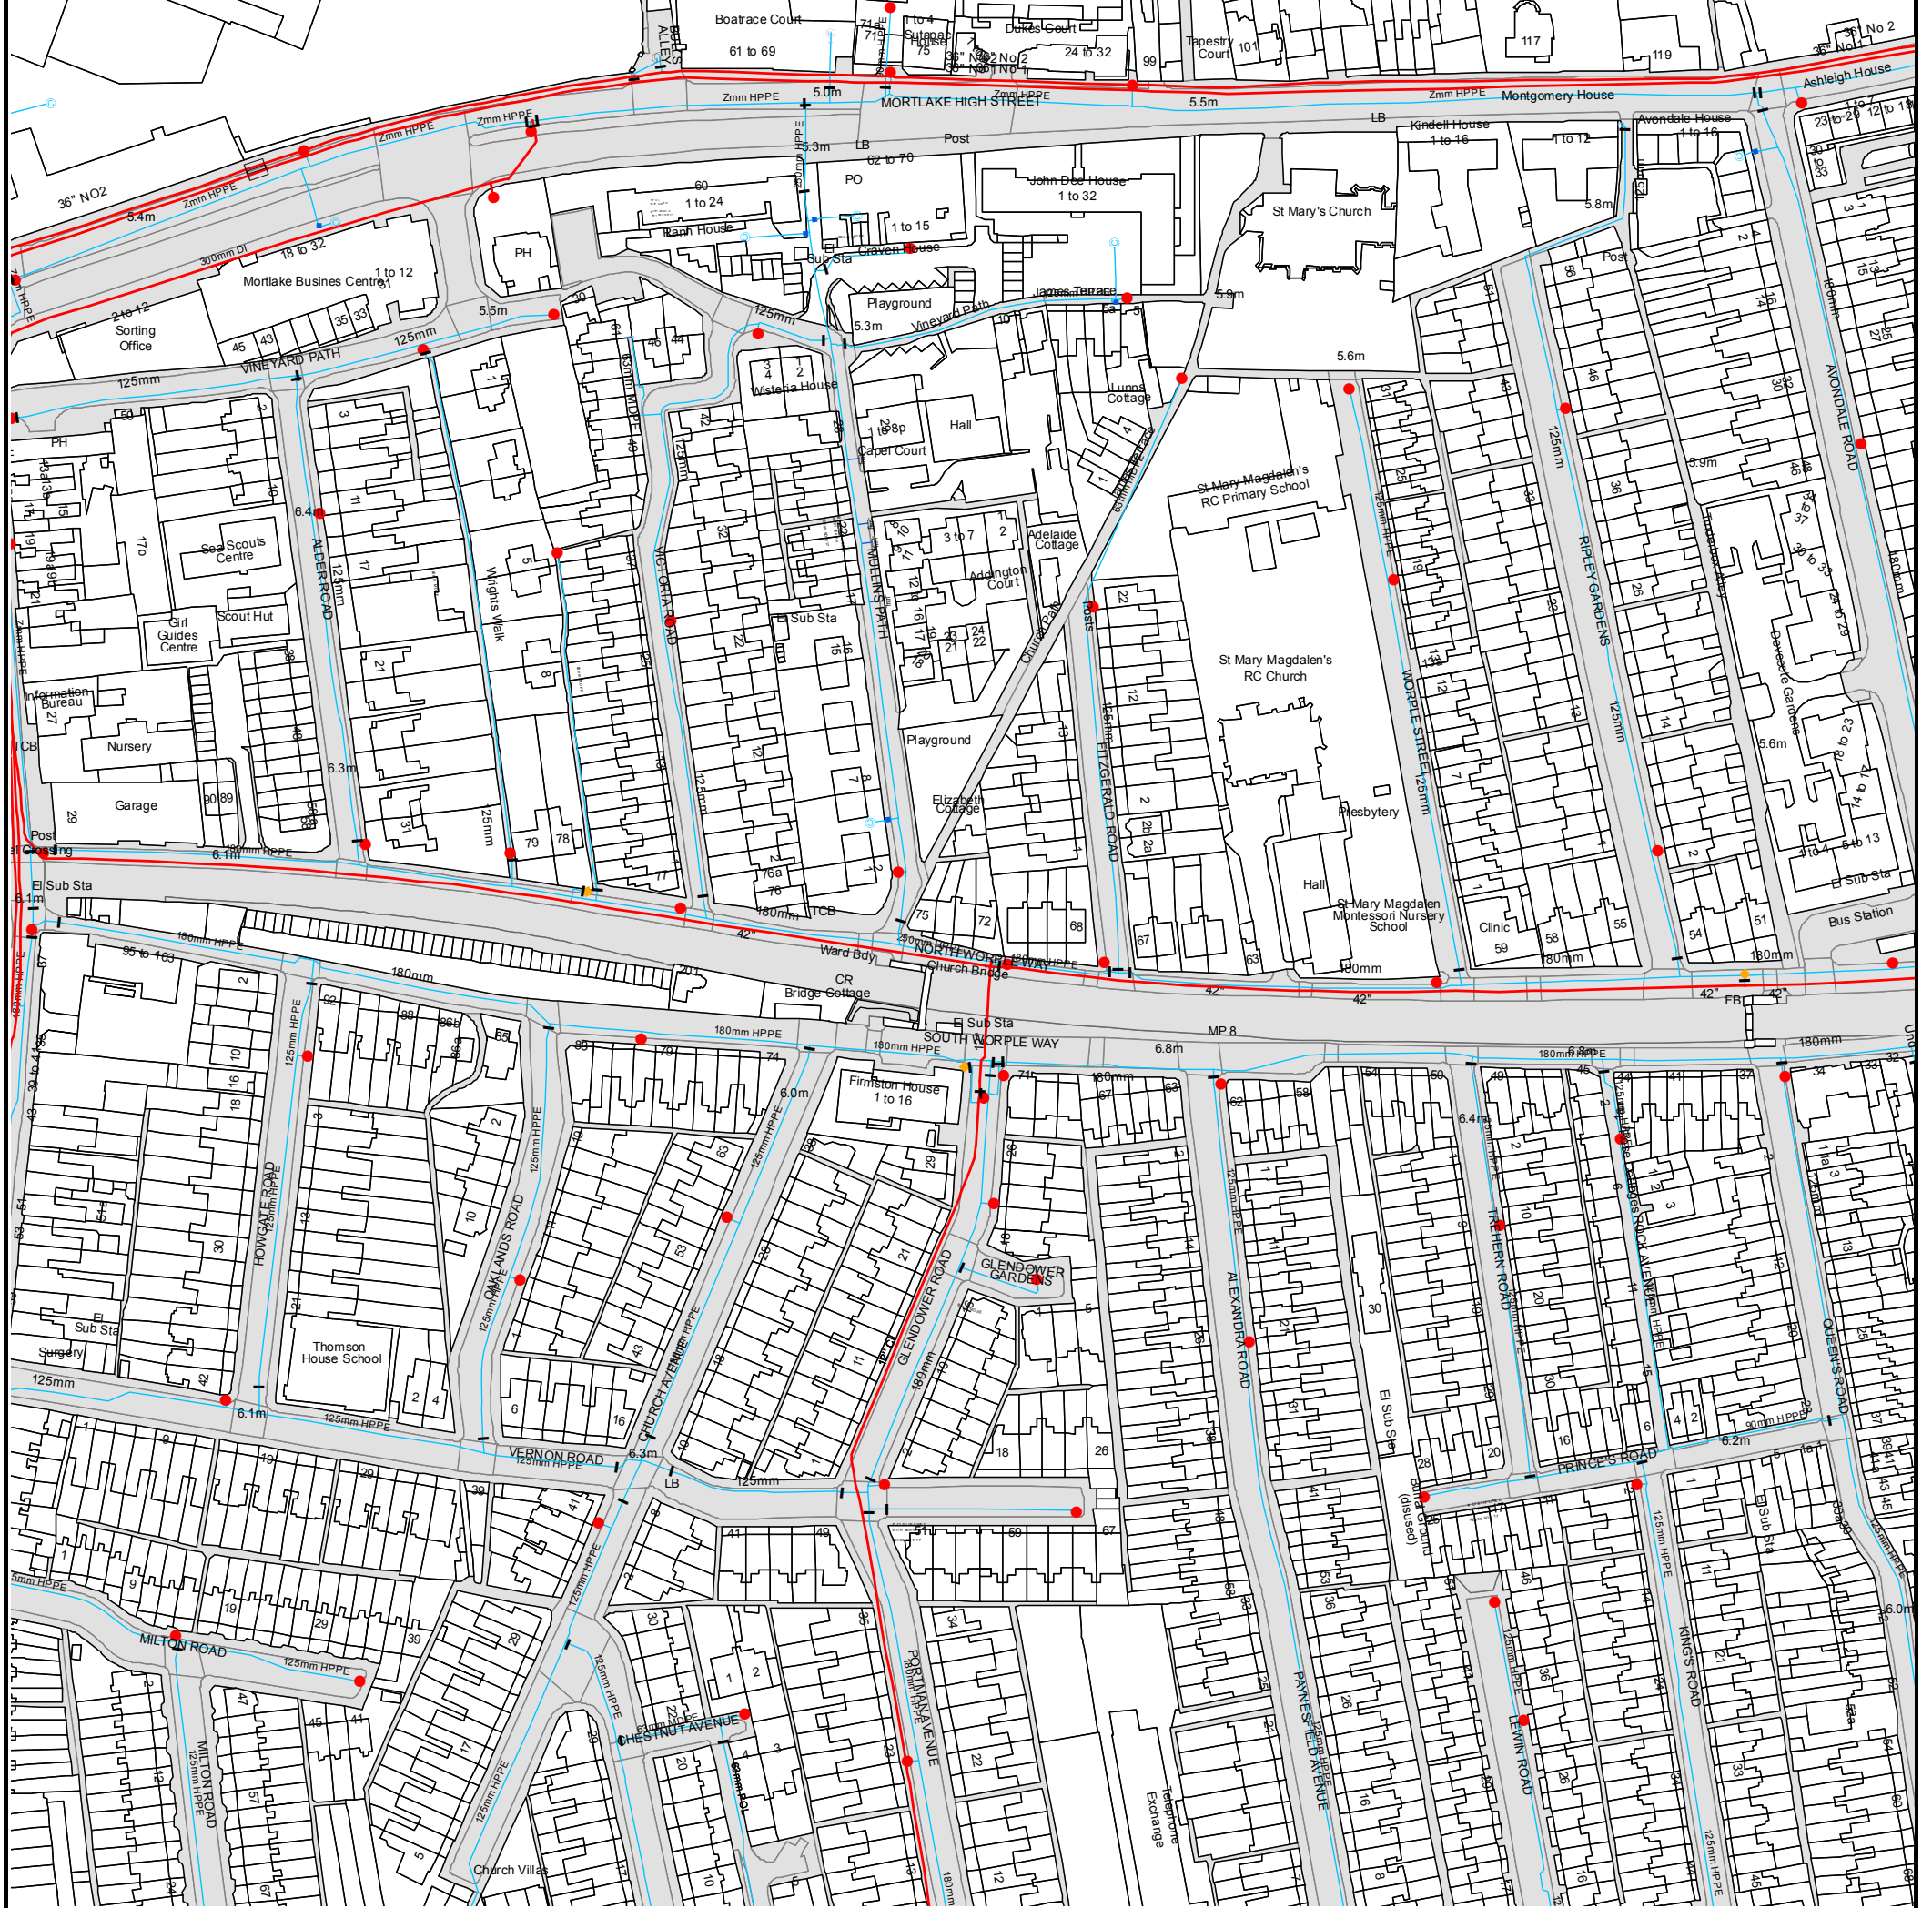

The width of the displayed area is 500m and the centre of the map is located at OS coordinates 520750,175750
 The position of the apparatus shown on this plan is given without obligation and warranty, and the accuracy cannot be guaranteed. Service pipes are not shown but their presence should be anticipated. No liability of any kind whatsoever is accepted by Thames Water for any error or omission. The actual position of mains and services must be verified and established on site before any works are undertaken.

Based on the Ordnance Survey Map with the Sanction of the controller of H.M. Stationery Office, License no. 100019345 Crown Copyright Reserved.




The width of the displayed area is 500m and the centre of the map is located at OS coordinates 520750,176250
 The position of the apparatus shown on this plan is given without obligation and warranty, and the accuracy cannot be guaranteed. Service pipes are not shown but their presence should be anticipated. No liability of any kind whatsoever is accepted by Thames Water for any error or omission. The actual position of mains and services must be verified and established on site before any works are undertaken.


Based on the Ordnance Survey Map with the Sanction of the controller of H.M. Stationery Office, License no. 100019345 Crown Copyright Reserved.





ALS Water Map Key


Water Pipes (Operated & Maintained by Thames Water)


- 
4" **Distribution Main:** The most common pipe shown on water maps. With few exceptions, domestic connections are only made to distribution mains.


- 
16" **Trunk Main:** A main carrying water from a source of supply to a treatment plant or reservoir, or from one treatment plant or reservoir to another. Also a main transferring water in bulk to smaller water mains used for supplying individual customers.

- 
3" SUPPLY **Supply Main:** A supply main indicates that the water main is used as a supply for a single property or group of properties.

- 
3" FIRE **Fire Main:** Where a pipe is used as a fire supply, the word FIRE will be displayed along the pipe.





- 
3" METERED **Metered Pipe:** A metered main indicates that the pipe in question supplies water for a single property or group of properties and that quantity of water passing through the pipe is metered even though there may be no meter symbol shown.

- 
Transmission Tunnel: A very large diameter water pipe. Most tunnels are buried very deep underground. These pipes are not expected to affect the structural integrity of buildings shown on the map provided.


- 
Proposed Main: A main that is still in the planning stages or in the process of being laid. More details of the proposed main and its reference number are generally included near the main.

PIPE DIAMETER	DEPTH BELOW GROUND
Up to 300mm (12")	900mm (3')
300mm - 600mm (12" - 24")	1100mm (3' 8")
600mm and bigger (24" plus)	1200mm (4')

Valves

-  General Purpose Valve
-  Air Valve
-  Pressure Control Valve
-  Customer Valve

Hydrants








-  Single Hydrant

Meters










-  Meter

End Items

Symbol indicating what happens at the end of a water main.

-  Blank Flange
-  Capped End
-  Emptying Pit
-  Undefined End
-  Manifold
-  Customer Supply
-  Fire Supply



Operational Sites

-  Booster Station
-  Other
-  Other (Proposed)
-  Pumping Station
-  Service Reservoir
-  Shaft Inspection
-  Treatment Works
-  Unknown
-  Water Tower

Other Symbols

-  Data Logger

Other Water Pipes (Not Operated or Maintained by Thames Water)

-  **Other Water Company Main:** Occasionally other water company water pipes may overlap the border of our clean water coverage area. These mains are denoted in purple and in most cases have the owner of the pipe displayed along them.
-  **Private Main:** Indicates that the water main in question is not owned by Thames Water. These mains normally have text associated with them indicating the diameter and owner of the pipe.

**B. London Borough of Richmond Upon Thames Sustainable Drainage Systems
Pro Forma**

Appendices

1. Project & Site Details	Project / Site Name (including sub-catchment / stage / phase where appropriate)	The Former Stag Brewery - Temporary Application for Filming
	Address & post code	Former Stag Brewery Site, Mortlake, Richmond Upon Thames
	OS Grid ref. (Easting, Northing)	E 520380
		N 176003
	LPA reference (if applicable)	PP-08380962
	Brief description of proposed work	Temporary use planning application for film production operations, erection of external film sets and ancillary activities within the Site
	Total site Area	61344 m ²
	Total existing impervious area	61344 m ²
	Total proposed impervious area	61344 m ²
	Is the site in a surface water flood risk catchment (ref. local Surface Water Management Plan)?	in critical drainage area (LFRMS)
Existing drainage connection type and location	River Thames via outfall & into Thames Water surface water network	
Designer Name	Nora Balboni	
Designer Position	Senior Engineer	

2. Proposed Discharge Arrangements	2a. Infiltration Feasibility		
	Superficial geology classification	Made Ground/Alluvium and Kempton Park Gravel	
	Bedrock geology classification	London Clay	
	Site infiltration rate	n/a	m/s
	Depth to groundwater level	n/a	m below ground level
	Is infiltration feasible?	no	
	2b. Drainage Hierarchy		
		<i>Feasible (Y/N)</i>	<i>Proposed (Y/N)</i>
	1 store rainwater for later use	N	N
	2 use infiltration techniques, such as porous surfaces in non-clay areas	N	N
	3 attenuate rainwater in ponds or open water features for gradual release	N	N
	4 attenuate rainwater by storing in tanks or sealed water features for gradual release	N	N
	5 discharge rainwater direct to a watercourse	N	N
	6 discharge rainwater to a surface water sewer/drain	N	N
	7 discharge rainwater to the combined sewer.	N	N
2c. Proposed Discharge Details			
Proposed discharge location	as existing		
Has the owner/regulator of the discharge location been	no change to existing regime		

Designer Company	Waterman Infrastructure & Environment	consulted?
------------------	---------------------------------------	------------

3a. Discharge Rates & Required Storage				
	Greenfield (GF) runoff rate (l/s)	Existing discharge rate (l/s)	Required storage for GF rate (m ³)	Proposed discharge rate (l/s)
Qbar				
1 in 1				
1 in 30				
1 in 100				
1 in 100 + CC				
Climate change allowance used		40%		
3b. Principal Method of Flow Control		n/a - as existing		
3c. Proposed SuDS Measures				
	Catchment area (m ²)	Plan area (m ²)	Storage vol. (m ³)	
Rainwater harvesting	0		0	
Infiltration systems	0		0	
Green roofs	0	0	0	
Blue roofs	0	0	0	
Filter strips	0	0	0	
Filter drains	0	0	0	
Bioretention / tree pits	0	0	0	
Pervious pavements	0	0	0	
Swales	0	0	0	
Basins/ponds	0	0	0	
Attenuation tanks	0		0	
Total	0	0	0	

4a. Discharge & Drainage Strategy	Page/section of drainage report
Infiltration feasibility (2a) – geotechnical factual and interpretive reports, including infiltration results	underlying contamination and potential for shallow groundwater in superficial deposits
Drainage hierarchy (2b)	n/a
Proposed discharge details (2c) – utility plans, correspondence / approval from owner/regulator of discharge location	n/a - no change in drainage regime
Discharge rates & storage (3a) – detailed hydrologic and hydraulic calculations	n/a - no change in drainage regime
Proposed SuDS measures & specifications (3b)	n/a - no change in drainage regime
4b. Other Supporting Details	Page/section of drainage report
Detailed Development Layout	Page 2
Detailed drainage design drawings, including exceedance flow routes	n/a - no change in drainage regime
Detailed landscaping plans	Page 2
Maintenance strategy	n/a
Demonstration of how the proposed SuDS measures improve:	
a) water quality of the runoff?	n/a
b) biodiversity?	n/a
c) amenity?	n/a