




PROPOSED REAR ELEVATION 1:100



PROPOSED SIDE ELEVATION 1:100

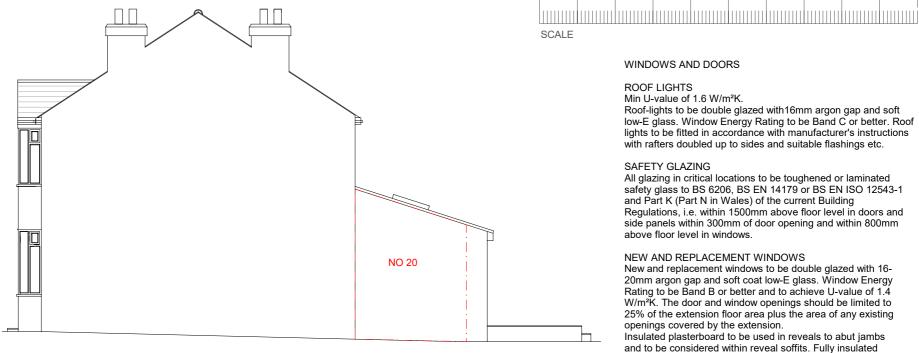



THIS DRAWING MUST NOT BE SCALED (Unless for planning authority purposes)

PRIOR TO THE COMMENCEMENT OF ANY WORKS THE BUILDER IS TO CHECK AND/OR DETERMINE ALL CONSTRUCTION DETAILS INCLUDING CHECKING EXISTING SITE LEVELS AND DIMENSIONS. THE DRAWING IS TO BE READ IN CONJUNCTION WITH ALL OTHER PROJECT DRAWINGS, CONSTRUCTION NOTES AND/OR PROJECT SPECIFICATION. ALL DISCREPANCIES SHOULD BE REPORTED IMMEDIATELY.

CDM Regulations 2007. Party Wall Act 1996, Clients and contractors are reminded that the project is within the scope of these regulations MBL Associates Ltd engaged as designers will not accept any liabilty for failer of these parties to carryout their duties as required by these

PLANNING

CLIENTS & CONTRACTORS ARE REMINDED THAT IF THE PROJECT REQUIRES AN APPLICATION FOR PLANNING, THIS APPLIES TO PRIOR APPROVAL. LAWFUL DEVELOPMENT APPROVAL. PERMITTED DEVELOPMENT RIGHTS TO RECENTLY BUILT PROPERTY'S AND HOUSES IN CONSERVATION AREAS. MBL ASSOCIATES Ltd. WILL NOT BE RESPONSIBLE IF WORKS COMMENCE AGAINST THIS ADVICE AND ENFORCEMENT ACTION IS TAKEN AGAINST YOU. MBL ASSOCIATES Ltd ADVISE THAT ALL CERTIFICATION OF PLANNING APPROVAL HAS BEEN GRANTED BEFORE ANY BUILDING WORK COMMENCES.

ALL STRUCTURAL INFORMATION TO BE IN CONNECTION WITH STRUCTURAL ENGINEERS CALCULATION AND DRAWINGS

ADDRESS

22 Chudleigh Road, Twickenham, TW27QR

DESCRIPTION

WINDOWS AND DOORS

Min U-value of 1.6 W/m²K.

above floor level in windows.

NEW AND REPLACEMENT WINDOWS

openings covered by the extension.

Roof-lights to be double glazed with 16mm argon gap and soft low-E glass. Window Energy Rating to be Band C or better. Roof lights to be fitted in accordance with manufacturer's instructions with rafters doubled up to sides and suitable flashings etc.

All glazing in critical locations to be toughened or laminated safety glass to BS 6206, BS EN 14179 or BS EN ISO 12543-1 and Part K (Part N in Wales) of the current Building Regulations, i.e. within 1500mm above floor level in doors and side panels within 300mm of door opening and within 800mm

New and replacement windows to be double glazed with 16-20mm argon gap and soft coat low-E glass. Window Energy

Rating to be Band B or better and to achieve U-value of 1.4

W/m²K. The door and window openings should be limited to 25% of the extension floor area plus the area of any existing

Insulated plasterboard to be used in reveals to abut jambs

and to be considered within reveal soffits. Fully insulated

and continuous cavity closers to be used around reveals. Windows and door frames to be taped to surrounding openings

ROOF LIGHTS

SAFETY GLAZING

PROPOSED ELEVATIONS

Scale:	Date:
1:100 @ A3	05/07/2024
Drawing No	CHR22/003C

COPYRIGHT MBL ASSOCIATES LIMITED (