



## INTERNAL DAYLIGHT REPORT

2 London Road, Twickenham

REPORT STATUS: 5.0



## Document Control Sheet

### REPORT STATUS: 5.0

<b>Client</b>	Sky Lofts		
<b>Development</b>	2 London Road, Twickenham TW1 3RY		
<b>Report Title</b>	Internal Daylight Report		
<b>Author</b>	Muhammad Ali	Reviewed by	Naomi Sadler
<b>Date</b>	19/06/2024	Revision No.	5.0
<b>Reason for Issue</b>	For planning permission application		

Revision History				
Revision	Date	Description	Prepared by	Checked by
1.0	20/05/2024	For information	Muhammad Ali	Naomi Sadler
2.0	21/06/2024	Revise the proposed building by incorporating passive measures	Muhammad Ali	Naomi Sadler
3.0	26/06/2024	Update the conclusion	Muhammad Ali	Naomi Sadler
4.0	18/09/2024	Update the internal daylight results with original windows schedule	Muhammad Ali	Naomi Sadler
5.0	19/09/2024	Update the wording	Muhammad Ali	Naomi Sadler

## About Sadler Energy and Environmental Services Ltd.

Our team of technical specialists offer advanced levels of expertise and experience to our clients. We have a wide experience of the construction and development industry from the concept and planning stage through to the completion of the project.

Our emphasis is to provide innovative and cost-effective solutions that respond to increasing demands for energy efficiency, quality and practical on-site applications.

## Table of Contents

Document Control Sheet.....	2
REPORT STATUS: 5.0.....	2
About Sadler Energy and Environmental Services Ltd. ....	2
1. Executive Summary .....	4
2. Introduction.....	5
2.1 Local Plan – London Borough of Richmond Upon Thames Council (2018) .....	5
3. BRE Guideline for Internal Daylight Assessment .....	6
3.1 Daylight Illuminance (sDA) Assessment .....	6
3.2 Daylight Factor Assessment .....	6
4. Sources of Information .....	7
5. Assumptions .....	7
6. Results Overview .....	8
6.1 Initial results (Existing Building) .....	8
Details of Initial results (Existing Building) .....	9
6.2 Mitigation measures and updated results .....	10
Details of Updated results (Proposed Building) .....	11
6.3 Discussion on Results .....	12
6.1.1 Plot 1.....	12
6.1.2 Plot 2.....	13
6.1.3 Plot 3.....	13
6.1.4 Plot 4.....	14
6.1.5 Plot 5 & Plot 6.....	14
7. Conclusion .....	15

## 1. Executive Summary

Sadler Energy & Environmental Services Ltd have been instructed by Sky Lofts to undertake a detailed daylight assessment to understand the potential daylight and sunlight changes that the proposed development, 2 London Road, Twickenham. The daylight evaluation takes into account the most recent drawings created by Wyeth Burrell Properties Architects, with the existing building plans dated May 3, 2024, and the proposed building plans dated June 13, 2024.

The daylight analysis has been concluded by employing the methodologies outlined in the Building Research Establishment Guidelines titled 'Site Layout Planning for Daylight and Sunlight - A Guide to Good Practice (2022)'. In order to carry out an assessment, we have generated a 3D computer model (Test Environment) of the proposed development and the relevant surrounding obstructions. Using this model and our specialist software, we have calculated the daylight levels within the proposed dwellings. Our assessment has considered all of the proposed residential units within the scheme. The daylight assessment considers all of the main habitable rooms (e.g. bedrooms, study, living rooms, kitchens etc.). However, areas like toilets, hallways, and staircases are not classified as habitable and are therefore excluded from the internal daylight assessment, in accordance with the BRE's guidelines in "Site Layout Planning for Daylight and Sunlight - A Guide to Good Practice (2022)."

The initial results show that only 35.7% of all habitable rooms assessed demonstrate compliance to the BRE minimum regulations. The further simulations were performed to increase the internal daylight level by adopting some passive measures. Finally, we have achieved around 71.4% of all habitable ensure compliance to the BRE minimum criteria. These changes ensure in an increase of around 100% in overall internal daylight results. The table provided below summarises the outcomes for the whole property (existing vs proposed). It is important to note that these guidelines are not a rigid set of rules but are advisory and need to be applied flexibly according to the specific context of a site.

Assessment Method	No. of rooms assessed	Rooms meeting target	Rooms meeting target	% Improvement
		Existing	Proposed	
Illuminance (SDA) & Daylight Factor (DF)	14	5 (35.7%)	10 (71.4%)	100%

*Internal Daylight Analysis Summary passing both assessments i.e. Illuminance (SDA) & Daylight Factor (DF)-Existing Vs Proposed*

Some rooms in the proposed development are still not meeting the requirements due to obstructions at both the rear and front sides, where in front two existing trees significantly block natural light, while on rear side where light obstruction is caused by the external walls of neighboring buildings surrounding the area. Furthermore, the kitchen/living/dining rooms of plot 1 and plot 3 have high room depth with obstruction of tree causing them fail to meet minimum criteria. The amount of natural light received could be improved through careful pruning and regular maintenance of the street trees.

Moreover, to address the issues for plot 5 and plot 6, roof lights have been suggested as a mitigation measure to enhance the amount of natural daylight in the habitable rooms on the 3<sup>rd</sup> floor roof. Furthermore, all the existing windows glass will be replaced with new glass that has a transmittance value of 0.75.

**The BRE guidelines in question are precisely that: guidelines which provide a recommendation to inform site layout and design. They are not mandatory, nor do they form planning policy, and their interpretation may be treated flexibly depending on the specifics of each site.**

## 2. Introduction

Sadler Energy and Environmental Services Ltd have been instructed to assess the quality of internal amenity within the proposed development at 2 London Road, Twickenham. Our assessment has considered all the proposed residential units within the dwelling. The daylight assessment considers all the main habitable rooms (bedrooms, living rooms, kitchens etc.), toilets, hallways and staircases are not considered habitable use. The report is based on a technical analysis that follows the guidelines outlined in the Building Research Establishment Guidelines called 'Site Layout Planning for Daylight and Sunlight - A Guide to Good Practice (2022)'.

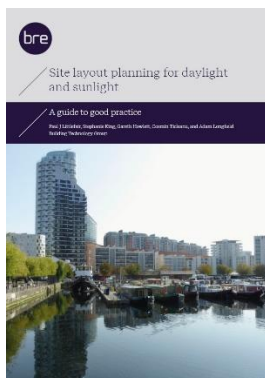


Figure 1 – Site Layout Planning for Daylight and Sunlight - A Guide to Good Practice (2022)

These guidelines are recommendations for site layout and design, but they are not mandatory and do not constitute planning policy. The interpretation of these guidelines can be flexible depending on the unique characteristics of each site.

- 2.1.1 The Building Research Establishment (BRE) Report 209, '*Site layout planning for daylight and sunlight: A guide to good practice*', is the reference document used by most local authorities for assessing daylight and sunlight in relation to new developments. Commonly referred to as 'the BRE guidelines', it provides various testing methodologies to calculate the potential light levels received by neighbours of a development site and provided within proposed new development.
- 2.1.2 The guidance given within the BRE document makes direct reference to the British Standard BS EN17037 (2018) and the CIBSE (Chartered Institute of Building Services Engineers) guide LG10: Daylighting – a guide for designers (2014). It is intended to be used in conjunction with these documents, which provide guidance on the assessment of daylight and sunlight within new buildings.

The BRE Guidelines are not mandatory, though decision-takers may consider the suitability of a proposed scheme for a site using the BRE guidance. Consideration will be given to the urban context within which a scheme is located, and the daylight and sunlight will be one of several planning considerations which the local authority will weigh in the planning balance.

### 2.1 Local Plan – London Borough of Richmond Upon Thames Council (2018)

#### 4.8 Amenity and Living Conditions

##### Policy LP 8 Amenity and Living Conditions

All development will be required to protect the amenity and living conditions for occupants of new, existing, adjoining and neighbouring properties. The Council will: 1. ensure the design and layout of buildings enables good standards of daylight and sunlight to be achieved in new development and in existing properties affected by new development; where existing daylight and sunlight conditions are already substandard, they should be improved where possible.

### 3. BRE Guideline for Internal Daylight Assessment

The 2022 update to the BRE 209 document was published on 9th June 2022. The new guidance reflects the UK National Annex of the British Standard: BS EN17037 (2018) and provides two methodologies for assessing the internal daylight amenity to new residential properties. These assessment methods are known as ‘Daylight Illuminance’ or ‘Daylight Factor and are described in more detail below: -

#### 3.1 Daylight Illuminance (sDA) Assessment

The Daylight Illuminance method utilises climactic data for the location of the site, based on a weather file for a typical or average year, to calculate the illuminance at points within a room on at least hourly intervals across a year. The illuminance is calculated across an assessment grid sat at the reference plane (usually desk height “0.85m”).

The guidance provides target illuminance levels that should be achieved across at least half of the reference plane for half of the daylight hours within a year. The targets set out within the national annex are as follows:

- ✎ Bedrooms – 100 Lux
- ✎ Living Rooms – 150 Lux
- ✎ Kitchens – 200 Lux

For spaces with a shared use the higher target would generally apply such that it would be appropriate to adopt a target of 150 Lux for a student bed sitting room if students would often spend time in their room during the day. The guidance notes that discretion should be used and, for example, a target of 150 Lux may be appropriate in a Living / Kitchen / Dining Room within a modern flatted development where the kitchens are not ‘habitable’ space, and small separate kitchens are to be avoided.

#### 3.2 Daylight Factor Assessment

The Daylight Factor method involves the computation of the daylight factor at each calculation point on the assessment grid.

The daylight factor is a ratio between internal and external illuminance expressed as a percentage. The calculation uses the CIE overcast sky model and is independent of orientation and location. In order to account for different climatic conditions at different locations different daylight factor targets may be applied for different cities with targets varying throughout the UK.

The daylight factor targets are to be achieved over at least 50% of the room assessment grid and are expressed as a median figure. For London these median daylight factor targets are:

- ✎ Bedrooms – 0.7%
- ✎ Living Rooms – 1.1%
- ✎ Kitchens – 1.4%

For multi-purpose living / kitchen / diner arrangements the higher ‘kitchen’ targets can be difficult to achieve due to the depth of internal space. In such cases, it is generally accepted that the 1.5% target for living rooms be used instead as this represents the predominant use of the space. The BRE guide gives the following: -

*“2.1.15 Non-daylit internal kitchens should be avoided wherever possible, especially if the kitchen is used as a dining area too. Daylight levels in kitchen areas should be checked. If the layout means that a small internal kitchen is inevitable, it should be directly linked to a well daylit room. Further guidance for assessment of this situation is given in Appendix C.”*

## 4. Sources of Information

2D Architectural drawings showing the proposed and surrounding buildings have been used to create a 3D computer model of the proposed development in the context of the surrounding buildings.

**Architect:** Wyeth Burrell Properties

### 2D drawings-v3.2 (Existing Building)

Existing Ground Floor Plan-FUL.04B.  
 Existing First Floor Plan-FUL.04C.  
 Existing Second Floor Plan-FUL.04D.  
 Existing Third Floor Plan-FUL.04E.  
 Existing Roof Plan-FUL.04F.  
 Existing Section- FUL.06.  
 Existing Section- FUL.07.  
 Existing Front & Rear Elevations- FUL.08A.  
 Existing Side Elevation- FUL.08B.  
 Location Plan- FUL.15.

### 2D drawings (Proposed Building)

Proposed Ground Floor Plan- P-01.  
 Proposed First Floor Plan- P-02.  
 Proposed Second Floor Plan- P-03.  
 Proposed Third Floor Plan- P-04.  
 Proposed Roof Plan- P-05.  
 Proposed Section- P-06.  
 Proposed Section- P-18.  
 Proposed Front & Rear Elevations- P-17.  
 Proposed Side Elevation- P-15.  
 Location Plan- FUL.15.

## 5. Assumptions

In order to produce the daylight and sunlight assessments in line with BRE guidance, we have applied a number of inputs to represent the physical nature of the proposed development and surrounding context. These inputs are: -

### Material reflectance values

Reflectance for rooms internal surfaces affect the resulting internal daylight. Lighter colours result in higher reflectance (white: 1.0; black:0.0). Windows Light Transmittance is the amount of light that enter the glazed surface.

Surface	Reflectance value
Interior walls	0.7
Interior ceilings	0.7
Floors	0.2
Exterior walls and obstructions	0.3
Exterior ground	0.2

Table 1 - Surface reflectance of construction materials

**Glazing properties**

We have assumed that the glazing used within the development will be standard clear double glazed with a low emissivity coating with a diffuse transmittance factor of 0.68 for initial simulations. However, as mitigation measure we have proposed to replace the new glazing with transmittance factor of 0.75. We have also applied a window framing factor, to account for the proportion of frame to glazing. We have used the standard BRE assumptions as listed in appendix C of the BRE guidance.

**6. Results Overview**

**6.1 Initial results (Existing Building)**

Initially, a detailed 3-dimensional computer model of the proposed development, and all the surrounding obstruction including trees and building of higher height difference was created. The model was assessed using proprietary software to calculate the various measures of daylight. The resulting levels were then compared to the relevant BRE guideline to determine the level of impact to each habitable room of residential development.

*Internal Daylight Analysis Summary passing both assessments i.e. Illuminance (SDA) & Daylight Factor (DF)-Old windows 0.68 transmittance values (Existing State)*

Assessment Method	No. of rooms assessed	Rooms meeting target
Illuminance (SDA) & Daylight Factor (DF)	14	5 (35.7%)

Table 2 - Internal Daylight Analysis Summary (Existing State)



### Details of Initial results (Existing Building)

Building Name	Unit No.	Floor	Room	Room Use	Illuminance (SDA)		Daylight Factor (DF)		
					Target Lux	% of Room meeting target	Target DF	% of Room meeting target	Median DF of Room
					(Lux)	(%)	(%)	(%)	(%)
Proposed	Plot 1	First	R1	LKD	150	38%	1.1	31%	0.989
			R2	Bedroom	100	8%	0.7	8%	0.692
			R3	Study	100	18%	0.7	12%	0.761
	Plot 2	First	R4	LKD	150	99%	1.1	99%	2.427
			R5	Bedroom	100	100%	0.7	100%	2.275
	Plot 3	Second	R6	LKD	150	45%	1.1	34%	0.8
			R7	Bedroom (1)	100	30%	0.7	24%	0.659
			R8	Bedroom (2)	100	47%	0.7	44%	0.963
	Plot 4	Second	R9	LKD	150	89%	1.1	81%	1.739
			R10	Bedroom	100	100%	0.7	71%	1.25
	Plot 5	Third	R11	LKD	150	14%	1.1	28%	2.486
			R12	Bedroom	100	33%	0.7	37%	3.389
	Plot 6	Third	R13	Bedroom	100	100%	0.7	81%	2.034
			R14	LKD	150	49%	1.1	37%	1.908

Table 3 - Internal Daylight Analysis Results (Existing Building)

## 6.2 Mitigation measures and updated results

- I. It is assumed that all window glass will be replaced with new glass that has a transmittance value of 0.75, characteristic of the new double glazing, in order to enhance the overall results.
- II. Two additional rooflights are proposed one for Plot 5-bedroom room and other for Plot 5 kitchen/living/dining room. Moreover, the size of Plot 6 kitchen/living/dining room rooflight is adjusted to 1.0m x 1.5m.

The results indicate that it helps the room meet the BRE criteria. The detailed results can be found in table 6.

Table 4 displays the results of rooms that meet both criteria, while other table 5 shows the results where rooms only meet the Illuminance (SDA) criteria.

*Internal Daylight Analysis Summary passing both assessments i.e. Illuminance (SDA) & Daylight Factor (DF)-New windows 0.75*

Assessment Method	No. of rooms assessed	Rooms meeting target
Illuminance (SDA) & Daylight Factor (DF)	14	10 (71.4%)

Table 4 - Internal Daylight Analysis Summary- Illuminance (SDA) & Daylight Factor (DF) - (0.75 Transmittance Value)

*Internal Daylight Analysis Summary, passing one assessment i.e. Illuminance (SDA)-New windows 0.75 transmittance values*

Assessment Method	No. of rooms assessed	Rooms meeting target
Illuminance (SDA)	14	11 (79%)

Table 5 - Internal Daylight Analysis Summary, Illuminance (SDA)- (0.75 Transmittance Value)

### Details of Updated results (Proposed Building)



Building Name	Unit No.	Floor	Room	Room Use	Illuminance (SDA)		Daylight Factor (DF)		
					Target Lux	% of Room meeting target	Target DF	% of Room meeting target	Median DF of Room
					(Lux)	(%)	(%)	(%)	(%)
Proposed	Plot 1	First	R1	LKD	150	41%	1.1	23%	0.911
			R2	Bedroom	100	31%	0.7	36%	0.692
			R3	Study	100	31%	0.7	35%	0.761
	Plot 2	First	R4	LKD	150	100%	1.1	79%	2.233
			R5	Bedroom	100	100%	0.7	100%	2.275
	Plot 3	Second	R6	LKD	150	51%	1.1	26%	0.865
			R7	Bedroom (1)	100	63%	0.7	62%	1.357
			R8	Bedroom (2)	100	70%	0.7	65%	0.963
	Plot 4	Second	R9	LKD	150	94%	1.1	75%	1.495
			R10	Bedroom	100	100%	0.7	85%	1.459
	Plot 5	Third	R11	LKD	150	81%	1.1	64%	2.773
			R12	Bedroom	100	100%	0.7	100%	3.389
	Plot 6	Third	R13	Bedroom	100	100%	0.7	85%	2.034
			R14	LKD	150	75%	1.1	51%	1.88

Table 6 - Internal Daylight Analysis Results (Proposed Building)




### 6.3 Discussion on Results

#### 6.1.1 Plot 1

The results with passive measures show that the Plot 1, bedroom 1 and study room still fails to meet the BRE criteria due to its position on the rear side of the development, where light obstruction is caused by the external walls of neighboring buildings surrounding the area.

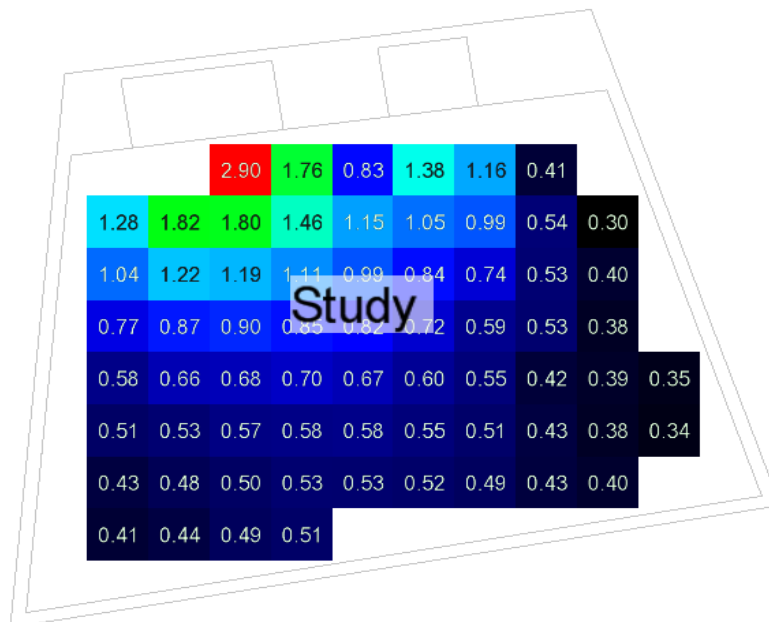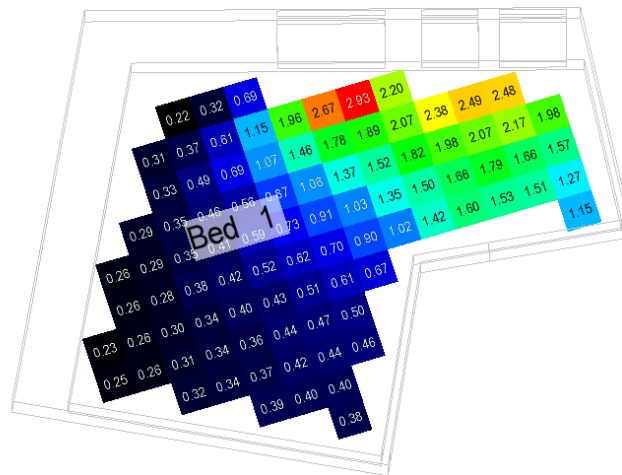

Further, the kitchen/living room fails due to the insufficient size of windows which do not provide sufficient daylight as per depth of room. Further, the trees in front of development act as obstruction and block major portion of daylight.



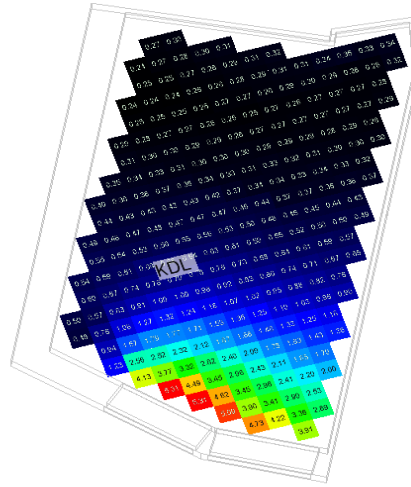


### 6.1.2 Plot 2

The findings show that all habitable rooms in plot 2 meet the BRE standards.

### 6.1.3 Plot 3

The findings represent that Plot 3, kitchen/living room does not meet the requirements due to the inadequate size of windows, which do not allow for sufficient daylight penetration considering the room's depth and further the tree in front cause blockage for light to fully transmit through glazing.

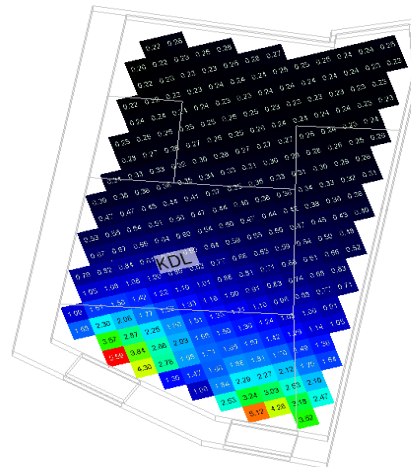


### 6.1.4 Plot 4

The findings show that all habitable rooms in plot 4 meet the BRE standards.

### 6.1.5 Plot 5 & Plot 6

The findings show that all habitable rooms in plot 5 and plot 6 with passive measures meet the BRE standards

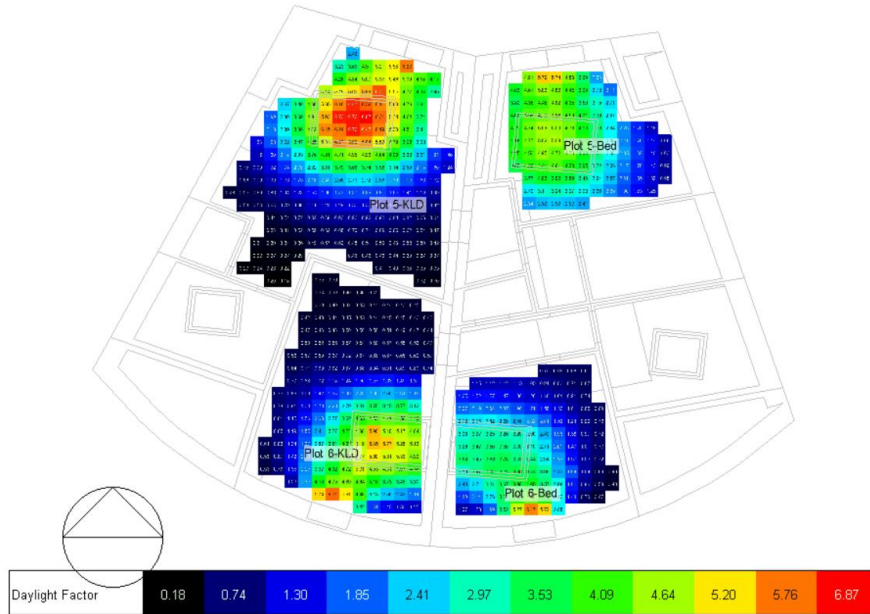

## 7. Conclusion

The daylighting analysis has been completed by utilising the methodologies specified in the Building Research Establishment Guidelines entitled 'Site Layout Planning for Daylight and Sunlight - A Guide to Good Practice (2022)'. The daylight assessment includes all the main habitable rooms (e.g. bedrooms, living rooms, kitchens, etc.), while toilets, hallways, and staircases are not considered habitable spaces.

### Results achieved:

The initial results indicate that more than 50% of the habitable rooms do not meet the minimum regulations set by BRE. The further simulations were performed to increase the internal daylight level by adopting some passive measures. Finally, we have achieved around 71% which are 10 out of 14 of all habitable ensure compliance to the BRE minimum criteria. The table provided below summarises the outcomes for the whole property (existing vs proposed).

It is important to note that these guidelines are not a rigid set of rules but are advisory and need to be applied flexibly according to the specific context of a site.

Assessment Method	No. of rooms assessed	Rooms meeting target	Rooms meeting target	% Improvement
		Existing	Proposed	
Illuminance (SDA) & Daylight Factor (DF)	14	5 (35.7%)	10 (71.4%)	100%

### Site complications and mitigation measures taken:

Some rooms in the proposed building are still not meeting the requirements due to obstructions at both the rear and front sides, where in front two existing trees significantly block natural light, while on rear side where light obstruction is caused by the external walls of neighboring buildings surrounding the area. Furthermore, the kitchen, living, and dining rooms of plot 1 and plot 3 have high room depth with obstruction of tree causing it fail to meet minimum criteria. The amount of natural light received could be improved through careful pruning and regular maintenance of the street trees.

To address the issue of plot 5 and plot 6 habitable rooms, roof lights have been suggested as a mitigation measure to enhance the amount of natural daylight in the habitable rooms. Furthermore, all the existing glazing will be replaced with new glazing that has a transmittance value of 0.75. These changes ensure in an increase of around 100% in overall internal daylight results.

The BRE guidelines in question are precisely that: guidelines which provide a recommendation to inform site layout and design. They are not mandatory, nor do they form planning policy and their interpretation may be treated flexibly depending on the specifics of each site.

## APPENDIX A – Model Image

Image 1


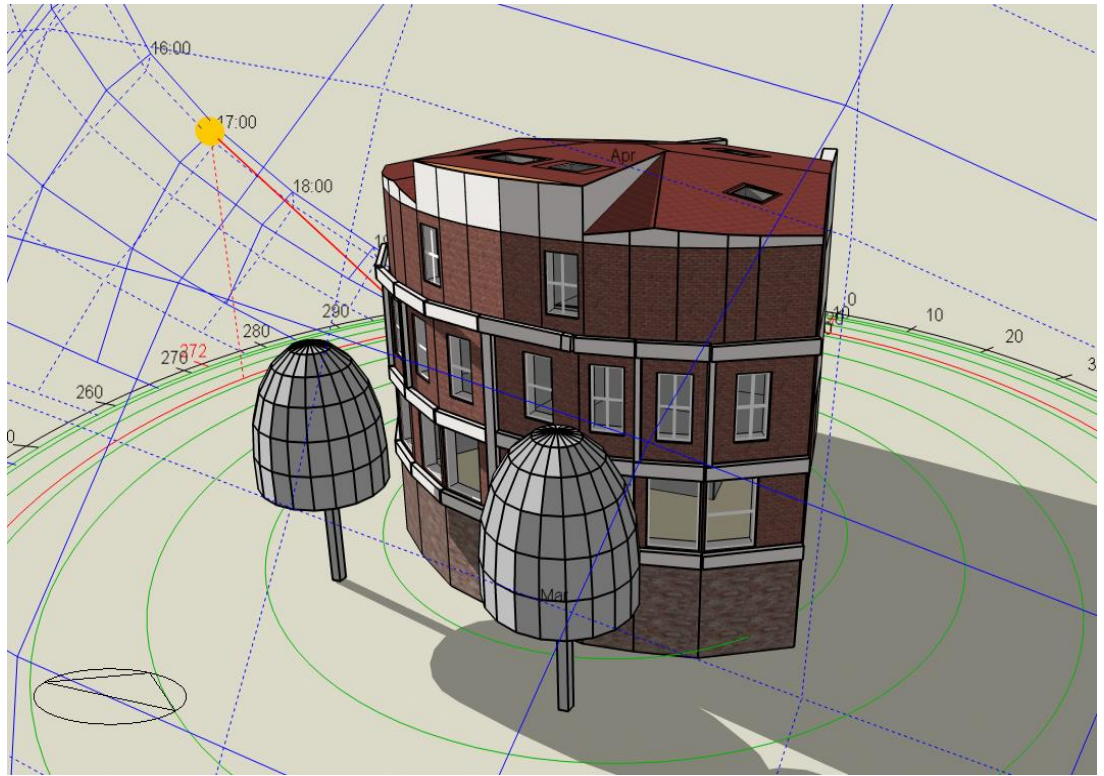


Image 2







## **APPENDIX B – Layouts of Proposed Development**

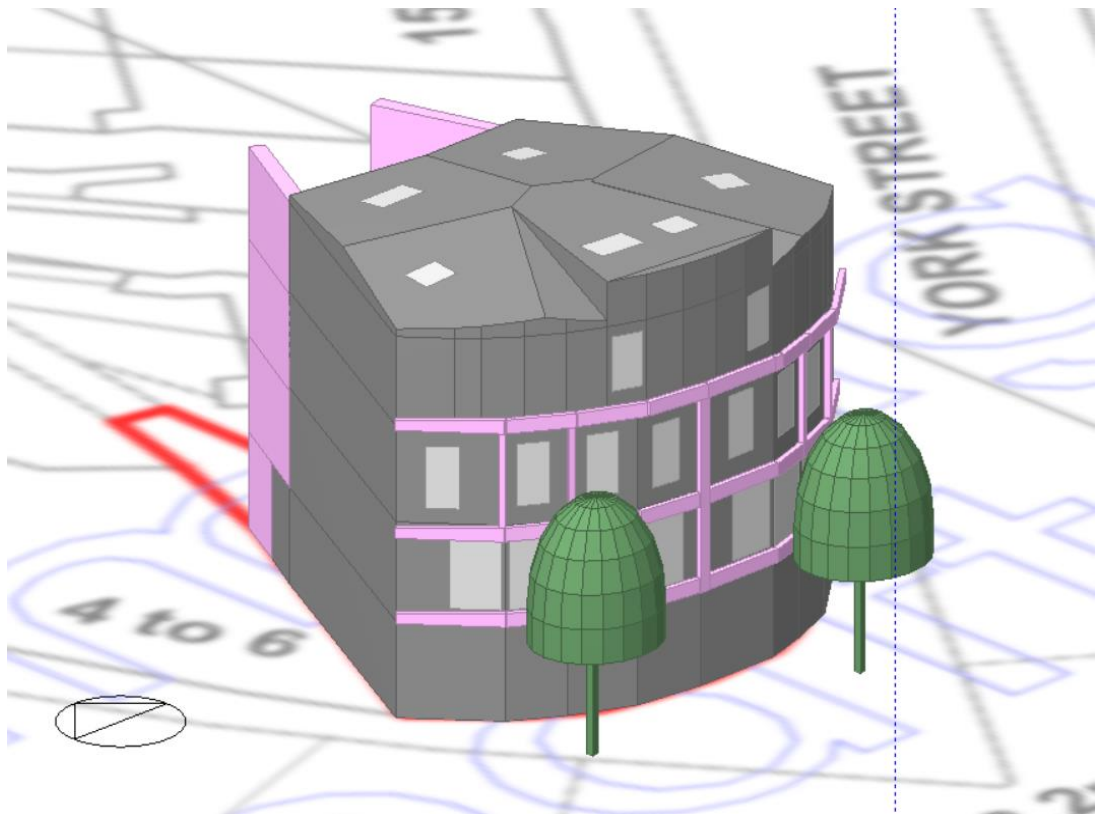

PROPOSED 1ST FLOOR PLAN

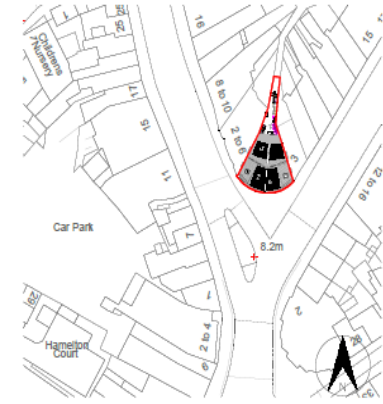

A. DOMLHY

REV	DATE	DESCRIPTION	DRN	CHKD

CLIENT  
Wyth Burrell Pearce Ltd. / Sklyoft

PROJECT  
Refurbishment of former HSBC Bank to create Commercial unit on B1 and GRND floors & 6 no. residential units on 1st/2nd and 3rd floors

DRAWING  
Proposed First Floor Plan



**LEWIS AND HICKEY**

18 Farnham Road  
Guthrie  
Surrey, GU1 4BA


Tel: 01483 560 908  
Fax: 01483 560 860  
Email: guthrie@lewisandhickey.com

SCALE	DATE	DRAWN	CHECKED
1:100	13.06.2024	HYA	

PROJECT No	DRAWING No	STATUS	REV
G4788	P-03	PLANNING	02



PROPOSED 2ND FLOOR PLAN

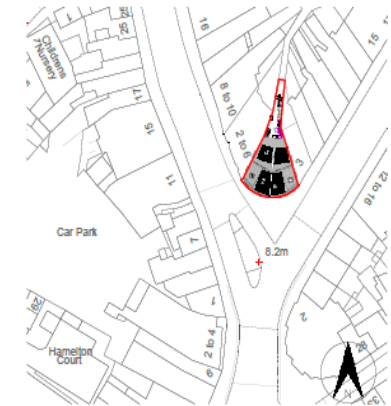

A DDMYY

REV	DATE	DESCRIPTION	DRN	CHKD

CLIENT  
Wyeth Burrell Pearce Ltd. /  
Skyloft

PROJECT  
Refurbishment of former HSBC Bank to create  
Commercial unit on B1 and GRND floors &  
6 no. residential units on 1st/2nd and 3rd floors

DRAWING  
Proposed Second Floor Plan




18 Farnham Road  
Godalming  
Surrey, GU11 4JX

LEWIS AND  
HICKEY

Tel: 01483 560 908  
Fax: 01483 560 960  
Email: info@lewisandhickey.com

SCALE	DATE	DRAWN	CHECKED
1:100	13.06.2024	HYA	
PROJECT No	DRAWING No	STATUS	REV
G4788	P-04	PLANNING	02

plan to approximate and report any discrepancies to the architect / designer.

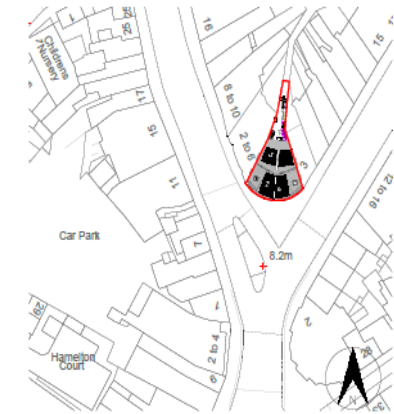

A. DDM/YY

REV.	DATE	DESCRIPTION	DRN	CHKD

CLIENT  
Wyeth Burrell Pearce Ltd. / Skyloft

PROJECT  
Refurbishment of former HSBC Bank to create Commercial unit on B1 and GRND floors & 6 no. residential units on 1st/2nd and 3rd floors

DRAWING  
Proposed Third Floor Plan




18 Farnham Road  
Twickenham  
Surrey, GU1 4JX

Tel: 01483 560 908  
Fax: 01483 560 950  
Email: info@lewisandhickey.com


**LEWIS AND HICKEY**

SCALE	DATE	DRAWN	CHECKED
1:100	13.06.2024	HYA	
PROJECT No	DRAWING No	STATUS	REV
G4788	P-05	PLANNING	02

PROPOSED 3RD FLOOR PLAN 1:100

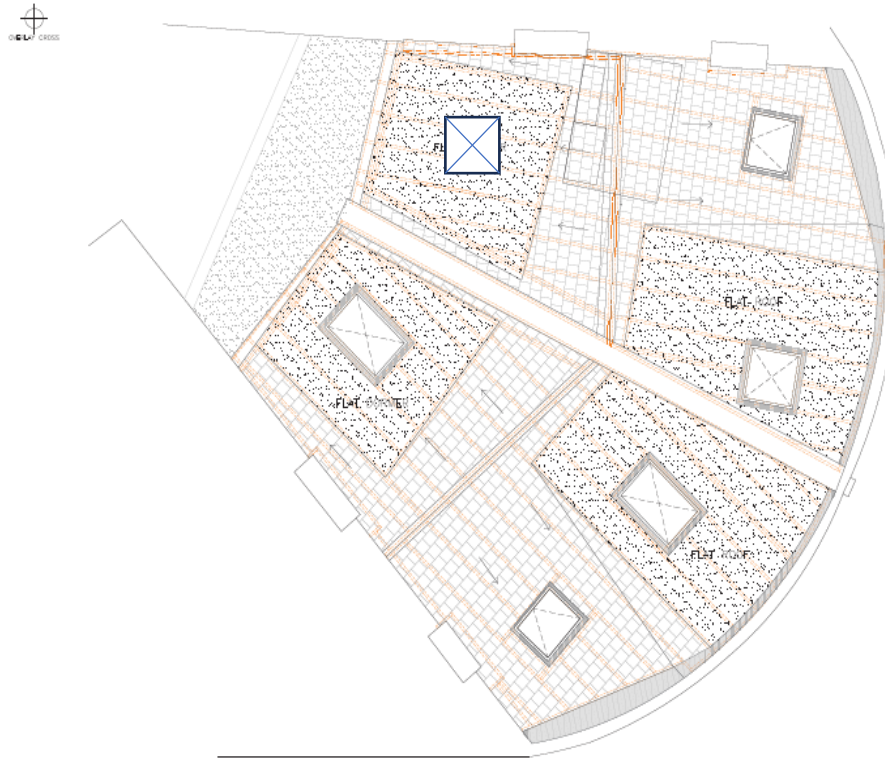

PROPOSED ROOF PLAN

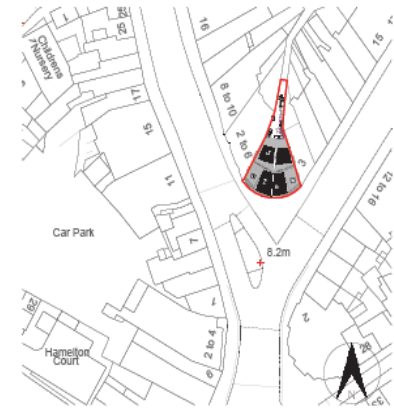

A DDMMYY

REV	DATE	DESCRIPTION	DRN	CHKD
-----	------	-------------	-----	------

CLIENT  
**Wyth Burrell Pearce Ltd. / Skyloft**

PROJECT  
**Refurbishment of former HSBC Bank to create Commercial unit on B1 and GRND floors & 6 no. residential units on 1st/2nd and 3rd floors**

DRAWING  
**Proposed Roof Plan**



18 Farnham Road  
 Guildford  
 Surrey, GU1 4BA

**LEWIS AND HICKEY**

Tel: 01483 560 908  
 Fax: 01483 560 660  
 Email: [info@lewisandhickey.com](mailto:info@lewisandhickey.com)

SCALE	DATE	DRAWN	CHECKED
-------	------	-------	---------

1:100	13.08.2024	HYA	
-------	------------	-----	--

PROJECT No	DRAWING No	STATUS	REV
------------	------------	--------	-----

G4788	P-06	PLANNING	02
-------	------	----------	----

This document is confidential. Neither the whole nor any part of this document may be disclosed to any third party without the prior written consent of Sadler Energy and Environmental Services Ltd. All rights reserved. Neither the whole nor any part of this document may be reproduced, stored in any retrieval system, or transmitted in any form or by any means (electronic, mechanical, reprographic recording or otherwise) without the prior written consent of the copyright owner.

**Sadler Energy and Environmental Services Ltd (SEES)**

Unit 5, Mill Court | The Sawmills | Durley

Southampton | Hampshire | SO32 2EJ

Telephone: 01962 718870

Email: [hello@sees.co.uk](mailto:hello@sees.co.uk)

Website: [www.sees.co.uk](http://www.sees.co.uk)