


FRONT ELEVATION- BOUNDARY FENCING

SECTION A'-A

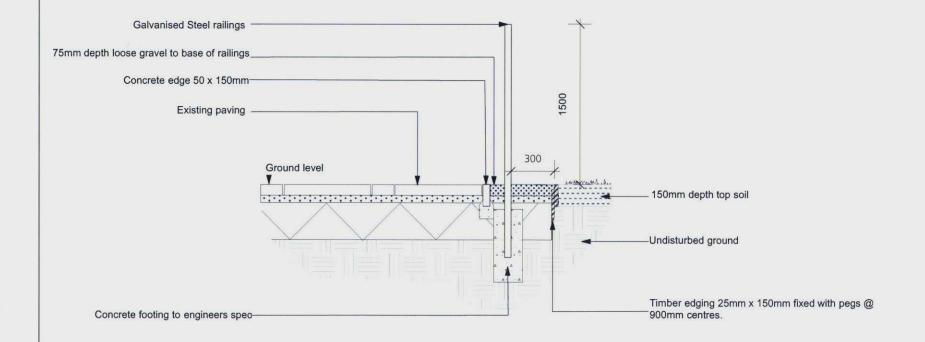

nut & washer.

Boundary Fence: Galvanised railings. Rails & anti-sag legs:40x10 flat Bars: 16 Dia. round equally spaced bars max 100mm apart. Posts: 60 x 60 x 3 mm with flush welded Bolts: galvanised cup square head bolts c/w

Overall height 1500mm above ground with upstand rods protruding through the top horizontal rail.


2No End pannels at either end of fence o marry with existing walls at 2000mm height. 1 set of matching double leaf swing gates each 1.5m wide.

All metalwork to be galvanised .
All component and panel dimensions, fixtures & fittings to be confirmed for suitability by the fencing manufacturer.

All below ground details to engineers design.



- This drawing is to be read in conjunction with other C&M landscape drawings and specifications.
- 2. Any discrepancies between sources of information should be immediately notified to the Landscape Architect for clarification.
- 3. Do not scale off this drawing.
- 4. All dimensions in mm unless otherwise stated.



The Old House, 2 Wellesley Court Road Croydon, Surrey CRO 1LE

t: +44 (0)020 8688 9083 f: +44 (0)020 8686 5844 e:london@colmog.co.uk www.colmog.co.uk