Greggs Bakery / Twickenham

SAP 10 Calculation Report
Townhouse

January 2023
Revision 01

1823-50-RPT-16

Predicted Energy Assessment

Twickenham London Square
London

Dwelling type: Enclosed mid House
Date of assessment: 05 December 2018
Produced by: Stroma Certification
Total floor area: 127 m²

This is a Predicted Energy Assessment for a property which is not yet complete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, an Energy Performance Certificate is required providing information about the energy performance of the completed property.

Energy performance has been assessed using the SAP 2012 methodology and is rated in terms of the energy use per square metre of floor area, energy efficiency based on fuel costs and environmental impact based on carbon dioxide (CO2) emissions.

Energy Efficiency Rating

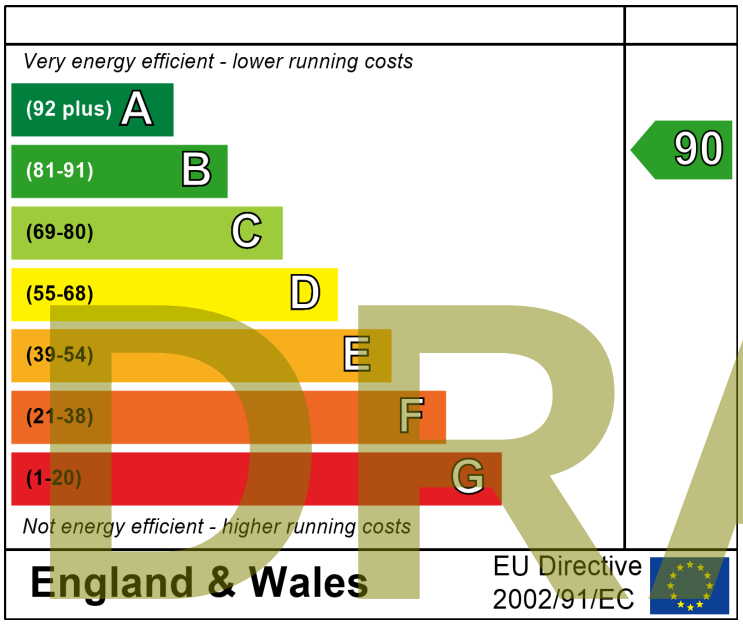

Environmental Impact (CO_2) Rating

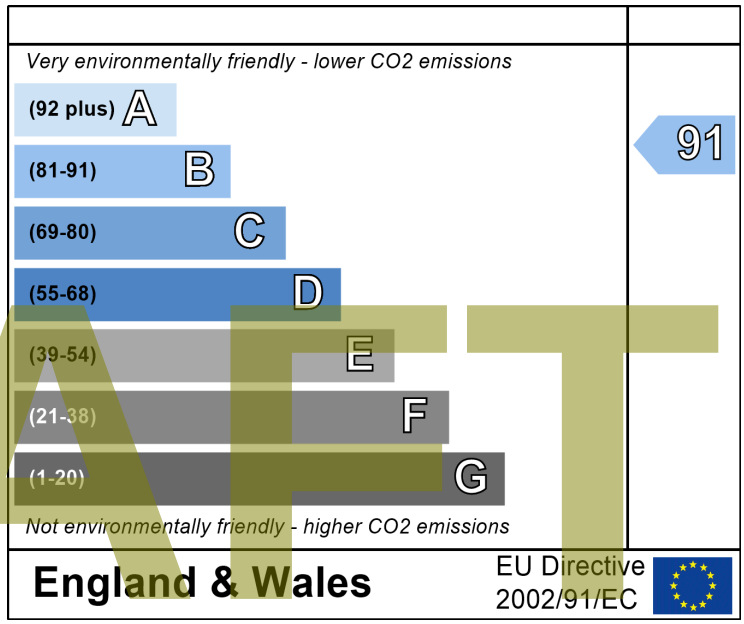

DRAFT

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO2) emissions. The higher the rating the less impact it has on the environment.

SAP WorkSheet: New dwelling design stage

User Details:

Assessor Name: **Stroma Number:**

Software Name: Stroma FSAP 2012 **Software Version:** Version: 1.0.5.57

Property Address: Gregs Bakery D12 - Townhouse

Address : Twickenham London Square, London

1. Overall dwelling dimensions:

	Area(m²)		Av. Height(m)		Volume(m³)	
Ground floor	31 (1a)	x	2.5 (2a)	=	77.5	(3a)
First floor	54 (1b)	x	2.5 (2b)	=	135	(3b)
Second floor	42 (1c)	x	2.5 (2c)	=	105	(3c)
Total floor area TFA = (1a)+(1b)+(1c)+(1d)+(1e)+.....(1n)	127 (4)					
Dwelling volume			(3a)+(3b)+(3c)+(3d)+(3e)+.....(3n)	=	317.5	(5)

2. Ventilation rate:

	main heating		secondary heating		other		total		m³ per hour	
Number of chimneys	0	+	0	+	0	=	0	x 40 =	0	(6a)
Number of open flues	0	+	0	+	0	=	0	x 20 =	0	(6b)
Number of intermittent fans							0	x 10 =	0	(7a)
Number of passive vents							0	x 10 =	0	(7b)
Number of flueless gas fires							0	x 40 =	0	(7c)

			Air changes per hour	
Infiltration due to chimneys, flues and fans =	(6a)+(6b)+(7a)+(7b)+(7c) =	0	÷ (5) =	0 (8)

If a pressurisation test has been carried out or is intended, proceed to (17), otherwise continue from (9) to (16)

Number of storeys in the dwelling (ns)			0 (9)
Additional infiltration		[(9)-1]x0.1 =	0 (10)
Structural infiltration: 0.25 for steel or timber frame or 0.35 for masonry construction			0 (11)
if both types of wall are present, use the value corresponding to the greater wall area (after deducting areas of openings); if equal user 0.35			
If suspended wooden floor, enter 0.2 (unsealed) or 0.1 (sealed), else enter 0			0 (12)
If no draught lobby, enter 0.05, else enter 0			0 (13)
Percentage of windows and doors draught stripped			0 (14)
Window infiltration	0.25 - [0.2 x (14) ÷ 100] =		0 (15)
Infiltration rate	(8) + (10) + (11) + (12) + (13) + (15) =		0 (16)
Air permeability value, q50, expressed in cubic metres per hour per square metre of envelope area			3 (17)
If based on air permeability value, then	(18) = [(17) ÷ 20]+(8), otherwise (18) = (16)		0.15 (18)
Air permeability value applies if a pressurisation test has been done or a degree air permeability is being used			
Number of sides sheltered			0 (19)
Shelter factor	(20) = 1 - [0.075 x (19)] =		1 (20)
Infiltration rate incorporating shelter factor	(21) = (18) x (20) =		0.15 (21)

Infiltration rate modified for monthly wind speed

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec

Monthly average wind speed from Table 7

(22)m=	5.1	5	4.9	4.4	4.3	3.8	3.8	3.7	4	4.3	4.5	4.7

DRAFT

SAP WorkSheet: New dwelling design stage

Wind Factor (22a)m = (22)m ÷ 4

(22a)m=	1.27	1.25	1.23	1.1	1.08	0.95	0.95	0.92	1	1.08	1.12	1.18

Adjusted infiltration rate (allowing for shelter and wind speed) = (21a) x (22a)m

0.19	0.19	0.18	0.16	0.16	0.14	0.14	0.14	0.15	0.16	0.17	0.18

Calculate effective air change rate for the applicable case

If mechanical ventilation: 0.5 (23a)

If exhaust air heat pump using Appendix N, (23b) = (23a) × Fmv (equation (N5)) , otherwise (23b) = (23a) 0.5 (23b)

If balanced with heat recovery: efficiency in % allowing for in-use factor (from Table 4h) = 78.2 (23c)

a) If balanced mechanical ventilation with heat recovery (MVHR) (24a)m = (22b)m + (23b) × [1 – (23c) ÷ 100]

(24a)m=	0.3	0.3	0.29	0.27	0.27	0.25	0.25	0.25	0.26	0.27	0.28	0.29	(24a)

b) If balanced mechanical ventilation without heat recovery (MV) (24b)m = (22b)m + (23b)

(24b)m=	0	0	0	0	0	0	0	0	0	0	0	0	(24b)

c) If whole house extract ventilation or positive input ventilation from outside
if (22b)m < 0.5 × (23b), then (24c) = (23b); otherwise (24c) = (22b) m + 0.5 × (23b)

(24c)m=	0	0	0	0	0	0	0	0	0	0	0	0	(24c)

d) If natural ventilation or whole house positive input ventilation from loft
if (22b)m = 1, then (24d)m = (22b)m otherwise (24d)m = 0.5 + [(22b)m² x 0.5]

(24d)m=	0	0	0	0	0	0	0	0	0	0	0	0	(24d)

Effective air change rate - enter (24a) or (24b) or (24c) or (24d) in box (25)

(25)m=	0.3	0.3	0.29	0.27	0.27	0.25	0.25	0.25	0.26	0.27	0.28	0.29	(25)

DRAFT

3. Heat losses and heat loss parameter:

ELEMENT	Gross area (m²)	Openings m²	Net Area A ,m²		U-value W/m2K		A X U (W/K)	k-value kJ/m²·K	A X k kJ/K	
Doors			2.1	x	1.3	=	2.73			(26)
Windows Type 1			2.88	x1/[1/(1.3)+ 0.04]		=	3.56			(27)
Windows Type 2			0.38	x1/[1/(1.3)+ 0.04]		=	0.47			(27)
Windows Type 3			4.08	x1/[1/(1.3)+ 0.04]		=	5.04			(27)
Windows Type 4			2.16	x1/[1/(1.3)+ 0.04]		=	2.67			(27)
Windows Type 5			4.08	x1/[1/(1.3)+ 0.04]		=	5.04			(27)
Windows Type 6			2.16	x1/[1/(1.3)+ 0.04]		=	2.67			(27)
Windows Type 7			2.89	x1/[1/(1.3)+ 0.04]		=	3.57			(27)
Windows Type 8			1.55	x1/[1/(1.3)+ 0.04]		=	1.92			(27)
Windows Type 9			2.89	x1/[1/(1.3)+ 0.04]		=	3.57			(27)
Windows Type 10			4	x1/[1/(1.3)+ 0.04]		=	4.94			(27)
Floor Type 1			31	x	0.12	=	3.72			(28)
Floor Type 2			17.2	x	0.12	=	2.064			(28)
Floor Type 3			1.5	x	0.12	=	0.18			(28)
Walls Type1	50.85	9.85	41	x	0.15	=	6.15			(29)
Walls Type2	9.24	6.48	2.76	x	0.15	=	0.41			(29)
Walls Type3	33.9	12.84	21.06	x	0.15	=	3.16			(29)

SAP WorkSheet: New dwelling design stage

Walls Type4	8.4	0	8.4	x	0.14	=	1.2		(29)
Walls Type5	18.3	0	18.3	x	0.14	=	2.62		(29)
Roof Type1	27.36	0	27.36	x	0.15	=	4.1		(30)
Roof Type2	71.82	0	71.82	x	0.15	=	10.77		(30)
Total area of elements, m²			269.57						(31)
Party wall			7.75	x	0	=	0		(32)
Party wall			24	x	0	=	0		(32)
Party wall			17.75	x	0	=	0		(32)
Party wall			24	x	0	=	0		(32)
Party wall			24	x	0	=	0		(32)
Party wall			17.75	x	0	=	0		(32)
Internal wall **			11.25						(32c)
Internal wall **			9						(32c)
Internal wall **			16						(32c)
Internal wall **			23						(32c)
Internal wall **			14						(32c)
Internal wall **			16.5						(32c)
Internal wall **			10.75						(32c)
Internal wall **			11.13						(32c)
Internal wall **			14						(32c)
Internal wall **			22						(32c)
Internal wall **			15						(32c)
Internal wall **			23						(32c)
Internal floor			31						(32d)
Internal floor			42						(32d)
Internal ceiling			73						(32e)

DRAFT

** for windows and roof windows, use effective window U-value calculated using formula 1/[(1/U-value)+0.04] as given in paragraph 3.2*

*** include the areas on both sides of internal walls and partitions*

Fabric heat loss, W/K = S (A x U) (26)…(30) + (32) = 70.56 (33)

Heat capacity Cm = S(A x k) ((28)…(30) + (32) + (32a)…(32e) = 31647.63 (34)

Thermal mass parameter (TMP = Cm ÷ TFA) in kJ/m²K Indicative Value: Medium 250 (35)

For design assessments where the details of the construction are not known precisely the indicative values of TMP in Table 1f can be used instead of a detailed calculation.

Thermal bridges : S (L x Y) calculated using Appendix K 16.23 (36)

if details of thermal bridging are not known (36) = 0.05 x (31)

Total fabric heat loss (33) + (36) = 86.79 (37)

Ventilation heat loss calculated monthly (38)m = 0.33 × (25)m x (5)

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	
(38)m=	31.46	31.07	30.67	28.71	28.32	26.35	26.35	25.96	27.14	28.32	29.1	29.89	(38)

Heat transfer coefficient, W/K (39)m = (37) + (38)m

(39)m=	118.25	117.86	117.47	115.5	115.11	113.14	113.14	112.75	113.93	115.11	115.9	116.68	

Average = Sum(39)$_{1...12}$ /12= 115.4 (39)

SAP WorkSheet: New dwelling design stage

Heat loss parameter (HLP), W/m²K (40)m = (39)m ÷ (4)

(40)m=	0.93	0.93	0.92	0.91	0.91	0.89	0.89	0.89	0.9	0.91	0.91	0.92

Average = Sum(40)$_{1...12}$ /12= 0.91 (40)

Number of days in month (Table 1a)

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
(41)m=	31	28	31	30	31	30	31	31	30	31	30	31

(41)

4. Water heating energy requirement: kWh/year:

Assumed occupancy, N 2.89 (42)
if TFA > 13.9, N = 1 + 1.76 x [1 - exp(-0.000349 x (TFA -13.9)2)] + 0.0013 x (TFA -13.9)
if TFA £ 13.9, N = 1

Annual average hot water usage in litres per day Vd,average = (25 x N) + 36 102.76 (43)
Reduce the annual average hot water usage by 5% if the dwelling is designed to achieve a water use target of not more that 125 litres per person per day (all water use, hot and cold)

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
(44)m=	113.04	108.93	104.82	100.71	96.6	92.48	92.48	96.6	100.71	104.82	108.93	113.04

Hot water usage in litres per day for each month Vd,m = factor from Table 1c x (43)

Total = Sum(44)$_{1...12}$ = 1233.13 (44)

Energy content of hot water used - calculated monthly = 4.190 x Vd,m x nm x DTm / 3600 kWh/month (see Tables 1b, 1c, 1d)

(45)m=	167.63	146.61	151.29	131.9	126.56	109.21	101.2	116.13	117.51	136.95	149.49	162.34

Total = Sum(45)$_{1...12}$ = 1616.83 (45)

If instantaneous water heating at point of use (no hot water storage), enter 0 in boxes (46) to (61)

(46)m=	25.14	21.99	22.69	19.78	18.98	16.38	15.18	17.42	17.63	20.54	22.42	24.35

(46)

Water storage loss:

Storage volume (litres) including any solar or WWHRS storage within same vessel 245 (47)

If community heating and no tank in dwelling, enter 110 litres in (47)
Otherwise if no stored hot water (this includes instantaneous combi boilers) enter '0' in (47)
Water storage loss:

a) If manufacturer's declared loss factor is known (kWh/day): 0.54 (48)

Temperature factor from Table 2b 1.0368 (49)

Energy lost from water storage, kWh/year (48) x (49) = 0 (50)

b) If manufacturer's declared cylinder loss factor is not known:

Hot water storage loss factor from Table 2 (kWh/litre/day) 0 (51)

If community heating see section 4.3

Volume factor from Table 2a 0 (52)

Temperature factor from Table 2b 0 (53)

Energy lost from water storage, kWh/year (47) x (51) x (52) x (53) = 0 (54)

Enter (50) or (54) in (55) 1.04 (55)

Water storage loss calculated for each month ((56)m = (55) × (41)m

(56)m=	32.14	29.03	32.14	31.1	32.14	31.1	32.14	32.14	31.1	32.14	31.1	32.14

(56)

If cylinder contains dedicated solar storage, (57)m = (56)m x [(50) – (H11)] ÷ (50), else (57)m = (56)m where (H11) is from Appendix H

(57)m=	32.14	29.03	32.14	31.1	32.14	31.1	32.14	32.14	31.1	32.14	31.1	32.14

(57)

Primary circuit loss (annual) from Table 3 0 (58)

Primary circuit loss calculated for each month (59)m = (58) ÷ 365 × (41)m
(modified by factor from Table H5 if there is solar water heating and a cylinder thermostat)

(59)m=	0	0	0	0	0	0	0	0	0	0	0	0

(59)

DRAFT

Combi loss calculated for each month (61)m = (60) ÷ 365 × (41)m

(61)m=	0	0	0	0	0	0	0	0	0	0	0	0	(61)

Total heat required for water heating calculated for each month (62)m = 0.85 × (45)m + (46)m + (57)m + (59)m + (61)m

(62)m=	199.77	175.64	183.43	163	158.7	140.31	133.34	148.27	148.62	169.09	180.6	194.48	(62)

Solar DHW input calculated using Appendix G or Appendix H (negative quantity) (enter '0' if no solar contribution to water heating)

(add additional lines if FGHRS and/or WWHRS applies, see Appendix G)

(63)m=	0	0	0	0	0	0	0	0	0	0	0	0	(63)

Output from water heater

(64)m=	199.77	175.64	183.43	163	158.7	140.31	133.34	148.27	148.62	169.09	180.6	194.48	

Output from water heater (annual)$_{1...12}$ 1995.26 (64)

Heat gains from water heating, kWh/month 0.25 ´ [0.85 × (45)m + (61)m] + 0.8 x [(46)m + (57)m + (59)m]

(65)m=	55.74	48.75	50.3	43.86	42.08	36.31	33.65	38.61	39.07	45.54	49.71	53.98	(65)

include (57)m in calculation of (65)m only if cylinder is in the dwelling or hot water is from community heating

5. Internal gains (see Table 5 and 5a):

Metabolic gains (Table 5), Watts

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	
(66)m=	173.21	173.21	173.21	173.21	173.21	173.21	173.21	173.21	173.21	173.21	173.21	173.21	(66)

Lighting gains (calculated in Appendix L, equation L9 or L9a), also see Table 5

(67)m=	65.54	58.21	47.34	35.84	26.79	22.62	24.44	31.77	42.64	54.14	63.19	67.36	(67)

Appliances gains (calculated in Appendix L, equation L13 or L13a), also see Table 5

(68)m=	438.91	443.46	431.98	407.55	376.71	347.72	328.35	323.8	335.28	359.71	390.55	419.54	(68)

Cooking gains (calculated in Appendix L, equation L15 or L15a), also see Table 5

(69)m=	55.21	55.21	55.21	55.21	55.21	55.21	55.21	55.21	55.21	55.21	55.21	55.21	(69)

Pumps and fans gains (Table 5a)

(70)m=	0	0	0	0	0	0	0	0	0	0	0	0	(70)

Losses e.g. evaporation (negative values) (Table 5)

(71)m=	-115.47	-115.47	-115.47	-115.47	-115.47	-115.47	-115.47	-115.47	-115.47	-115.47	-115.47	-115.47	(71)

Water heating gains (Table 5)

(72)m=	74.92	72.54	67.61	60.91	56.56	50.43	45.23	51.9	54.27	61.21	69.04	72.55	(72)

Total internal gains = (66)m + (67)m + (68)m + (69)m + (70)m + (71)m + (72)m

(73)m=	692.31	687.16	659.88	617.24	573	533.71	510.96	520.41	545.13	588	635.72	672.4	(73)

6. Solar gains:

Solar gains are calculated using solar flux from Table 6a and associated equations to convert to the applicable orientation.

Orientation:	Access Factor Table 6d		Area m²		Flux Table 6a		g_ Table 6b		FF Table 6c		Gains (W)	
East	0.9x 0.77	x	0.38	x	19.64	x	0.4	x	0.8	=	1.66	(76)
East	0.9x 0.77	x	2.16	x	19.64	x	0.4	x	0.8	=	9.41	(76)
East	0.9x 0.77	x	4.08	x	19.64	x	0.4	x	0.8	=	17.77	(76)
East	0.9x 0.77	x	2.16	x	19.64	x	0.4	x	0.8	=	9.41	(76)
East	0.9x 0.77	x	1.55	x	19.64	x	0.4	x	0.8	=	6.75	(76)

DRAFT

SAP WorkSheet: New dwelling design stage

East	0.9x	0.77	x	2.89	x	19.64	x	0.4	x	0.8	=	12.59	(76)
East	0.9x	0.77	x	4	x	19.64	x	0.4	x	0.8	=	17.42	(76)
East	0.9x	0.77	x	0.38	x	38.42	x	0.4	x	0.8	=	3.24	(76)
East	0.9x	0.77	x	2.16	x	38.42	x	0.4	x	0.8	=	18.4	(76)
East	0.9x	0.77	x	4.08	x	38.42	x	0.4	x	0.8	=	34.76	(76)
East	0.9x	0.77	x	2.16	x	38.42	x	0.4	x	0.8	=	18.4	(76)
East	0.9x	0.77	x	1.55	x	38.42	x	0.4	x	0.8	=	13.21	(76)
East	0.9x	0.77	x	2.89	x	38.42	x	0.4	x	0.8	=	24.62	(76)
East	0.9x	0.77	x	4	x	38.42	x	0.4	x	0.8	=	34.08	(76)
East	0.9x	0.77	x	0.38	x	63.27	x	0.4	x	0.8	=	5.33	(76)
East	0.9x	0.77	x	2.16	x	63.27	x	0.4	x	0.8	=	30.31	(76)
East	0.9x	0.77	x	4.08	x	63.27	x	0.4	x	0.8	=	57.25	(76)
East	0.9x	0.77	x	2.16	x	63.27	x	0.4	x	0.8	=	30.31	(76)
East	0.9x	0.77	x	1.55	x	63.27	x	0.4	x	0.8	=	21.75	(76)
East	0.9x	0.77	x	2.89	x	63.27	x	0.4	x	0.8	=	40.55	(76)
East	0.9x	0.77	x	4	x	63.27	x	0.4	x	0.8	=	56.13	(76)
East	0.9x	0.77	x	0.38	x	92.28	x	0.4	x	0.8	=	7.78	(76)
East	0.9x	0.77	x	2.16	x	92.28	x	0.4	x	0.8	=	44.2	(76)
East	0.9x	0.77	x	4.08	x	92.28	x	0.4	x	0.8	=	83.49	(76)
East	0.9x	0.77	x	2.16	x	92.28	x	0.4	x	0.8	=	44.2	(76)
East	0.9x	0.77	x	1.55	x	92.28	x	0.4	x	0.8	=	31.72	(76)
East	0.9x	0.77	x	2.89	x	92.28	x	0.4	x	0.8	=	59.14	(76)
East	0.9x	0.77	x	4	x	92.28	x	0.4	x	0.8	=	81.86	(76)
East	0.9x	0.77	x	0.38	x	113.09	x	0.4	x	0.8	=	9.53	(76)
East	0.9x	0.77	x	2.16	x	113.09	x	0.4	x	0.8	=	54.17	(76)
East	0.9x	0.77	x	4.08	x	113.09	x	0.4	x	0.8	=	102.32	(76)
East	0.9x	0.77	x	2.16	x	113.09	x	0.4	x	0.8	=	54.17	(76)
East	0.9x	0.77	x	1.55	x	113.09	x	0.4	x	0.8	=	38.87	(76)
East	0.9x	0.77	x	2.89	x	113.09	x	0.4	x	0.8	=	72.48	(76)
East	0.9x	0.77	x	4	x	113.09	x	0.4	x	0.8	=	100.32	(76)
East	0.9x	0.77	x	0.38	x	115.77	x	0.4	x	0.8	=	9.76	(76)
East	0.9x	0.77	x	2.16	x	115.77	x	0.4	x	0.8	=	55.45	(76)
East	0.9x	0.77	x	4.08	x	115.77	x	0.4	x	0.8	=	104.75	(76)
East	0.9x	0.77	x	2.16	x	115.77	x	0.4	x	0.8	=	55.45	(76)
East	0.9x	0.77	x	1.55	x	115.77	x	0.4	x	0.8	=	39.79	(76)
East	0.9x	0.77	x	2.89	x	115.77	x	0.4	x	0.8	=	74.2	(76)
East	0.9x	0.77	x	4	x	115.77	x	0.4	x	0.8	=	102.69	(76)
East	0.9x	0.77	x	0.38	x	110.22	x	0.4	x	0.8	=	9.29	(76)
East	0.9x	0.77	x	2.16	x	110.22	x	0.4	x	0.8	=	52.79	(76)
East	0.9x	0.77	x	4.08	x	110.22	x	0.4	x	0.8	=	99.72	(76)
East	0.9x	0.77	x	2.16	x	110.22	x	0.4	x	0.8	=	52.79	(76)

DRAFT

SAP WorkSheet: New dwelling design stage

East	0.9x	0.77	x	1.55	x	110.22	x	0.4	x	0.8	=	37.89	(76)
East	0.9x	0.77	x	2.89	x	110.22	x	0.4	x	0.8	=	70.64	(76)
East	0.9x	0.77	x	4	x	110.22	x	0.4	x	0.8	=	97.77	(76)
East	0.9x	0.77	x	0.38	x	94.68	x	0.4	x	0.8	=	7.98	(76)
East	0.9x	0.77	x	2.16	x	94.68	x	0.4	x	0.8	=	45.35	(76)
East	0.9x	0.77	x	4.08	x	94.68	x	0.4	x	0.8	=	85.66	(76)
East	0.9x	0.77	x	2.16	x	94.68	x	0.4	x	0.8	=	45.35	(76)
East	0.9x	0.77	x	1.55	x	94.68	x	0.4	x	0.8	=	32.54	(76)
East	0.9x	0.77	x	2.89	x	94.68	x	0.4	x	0.8	=	60.68	(76)
East	0.9x	0.77	x	4	x	94.68	x	0.4	x	0.8	=	83.98	(76)
East	0.9x	0.77	x	0.38	x	73.59	x	0.4	x	0.8	=	6.2	(76)
East	0.9x	0.77	x	2.16	x	73.59	x	0.4	x	0.8	=	35.25	(76)
East	0.9x	0.77	x	4.08	x	73.59	x	0.4	x	0.8	=	66.58	(76)
East	0.9x	0.77	x	2.16	x	73.59	x	0.4	x	0.8	=	35.25	(76)
East	0.9x	0.77	x	1.55	x	73.59	x	0.4	x	0.8	=	25.29	(76)
East	0.9x	0.77	x	2.89	x	73.59	x	0.4	x	0.8	=	47.16	(76)
East	0.9x	0.77	x	4	x	73.59	x	0.4	x	0.8	=	65.28	(76)
East	0.9x	0.77	x	0.38	x	45.59	x	0.4	x	0.8	=	3.84	(76)
East	0.9x	0.77	x	2.16	x	45.59	x	0.4	x	0.8	=	21.84	(76)
East	0.9x	0.77	x	4.08	x	45.59	x	0.4	x	0.8	=	41.25	(76)
East	0.9x	0.77	x	2.16	x	45.59	x	0.4	x	0.8	=	21.84	(76)
East	0.9x	0.77	x	1.55	x	45.59	x	0.4	x	0.8	=	15.67	(76)
East	0.9x	0.77	x	2.89	x	45.59	x	0.4	x	0.8	=	29.22	(76)
East	0.9x	0.77	x	4	x	45.59	x	0.4	x	0.8	=	40.44	(76)
East	0.9x	0.77	x	0.38	x	24.49	x	0.4	x	0.8	=	2.06	(76)
East	0.9x	0.77	x	2.16	x	24.49	x	0.4	x	0.8	=	11.73	(76)
East	0.9x	0.77	x	4.08	x	24.49	x	0.4	x	0.8	=	22.16	(76)
East	0.9x	0.77	x	2.16	x	24.49	x	0.4	x	0.8	=	11.73	(76)
East	0.9x	0.77	x	1.55	x	24.49	x	0.4	x	0.8	=	8.42	(76)
East	0.9x	0.77	x	2.89	x	24.49	x	0.4	x	0.8	=	15.69	(76)
East	0.9x	0.77	x	4	x	24.49	x	0.4	x	0.8	=	21.72	(76)
East	0.9x	0.77	x	0.38	x	16.15	x	0.4	x	0.8	=	1.36	(76)
East	0.9x	0.77	x	2.16	x	16.15	x	0.4	x	0.8	=	7.74	(76)
East	0.9x	0.77	x	4.08	x	16.15	x	0.4	x	0.8	=	14.61	(76)
East	0.9x	0.77	x	2.16	x	16.15	x	0.4	x	0.8	=	7.74	(76)
East	0.9x	0.77	x	1.55	x	16.15	x	0.4	x	0.8	=	5.55	(76)
East	0.9x	0.77	x	2.89	x	16.15	x	0.4	x	0.8	=	10.35	(76)
East	0.9x	0.77	x	4	x	16.15	x	0.4	x	0.8	=	14.33	(76)
West	0.9x	0.77	x	2.88	x	19.64	x	0.4	x	0.8	=	12.54	(80)
West	0.9x	0.77	x	4.08	x	19.64	x	0.4	x	0.8	=	17.77	(80)
West	0.9x	0.77	x	2.89	x	19.64	x	0.4	x	0.8	=	12.59	(80)

DRAFT

SAP WorkSheet: New dwelling design stage

West	0.9x	0.77	x	2.88	x	38.42	x	0.4	x	0.8	=	24.54	(80)
West	0.9x	0.77	x	4.08	x	38.42	x	0.4	x	0.8	=	34.76	(80)
West	0.9x	0.77	x	2.89	x	38.42	x	0.4	x	0.8	=	24.62	(80)
West	0.9x	0.77	x	2.88	x	63.27	x	0.4	x	0.8	=	40.41	(80)
West	0.9x	0.77	x	4.08	x	63.27	x	0.4	x	0.8	=	57.25	(80)
West	0.9x	0.77	x	2.89	x	63.27	x	0.4	x	0.8	=	40.55	(80)
West	0.9x	0.77	x	2.88	x	92.28	x	0.4	x	0.8	=	58.94	(80)
West	0.9x	0.77	x	4.08	x	92.28	x	0.4	x	0.8	=	83.49	(80)
West	0.9x	0.77	x	2.89	x	92.28	x	0.4	x	0.8	=	59.14	(80)
West	0.9x	0.77	x	2.88	x	113.09	x	0.4	x	0.8	=	72.23	(80)
West	0.9x	0.77	x	4.08	x	113.09	x	0.4	x	0.8	=	102.32	(80)
West	0.9x	0.77	x	2.89	x	113.09	x	0.4	x	0.8	=	72.48	(80)
West	0.9x	0.77	x	2.88	x	115.77	x	0.4	x	0.8	=	73.94	(80)
West	0.9x	0.77	x	4.08	x	115.77	x	0.4	x	0.8	=	104.75	(80)
West	0.9x	0.77	x	2.89	x	115.77	x	0.4	x	0.8	=	74.2	(80)
West	0.9x	0.77	x	2.88	x	110.22	x	0.4	x	0.8	=	70.39	(80)
West	0.9x	0.77	x	4.08	x	110.22	x	0.4	x	0.8	=	99.72	(80)
West	0.9x	0.77	x	2.89	x	110.22	x	0.4	x	0.8	=	70.64	(80)
West	0.9x	0.77	x	2.88	x	94.68	x	0.4	x	0.8	=	60.47	(80)
West	0.9x	0.77	x	4.08	x	94.68	x	0.4	x	0.8	=	85.66	(80)
West	0.9x	0.77	x	2.89	x	94.68	x	0.4	x	0.8	=	60.68	(80)
West	0.9x	0.77	x	2.88	x	73.59	x	0.4	x	0.8	=	47	(80)
West	0.9x	0.77	x	4.08	x	73.59	x	0.4	x	0.8	=	66.58	(80)
West	0.9x	0.77	x	2.89	x	73.59	x	0.4	x	0.8	=	47.16	(80)
West	0.9x	0.77	x	2.88	x	45.59	x	0.4	x	0.8	=	29.12	(80)
West	0.9x	0.77	x	4.08	x	45.59	x	0.4	x	0.8	=	41.25	(80)
West	0.9x	0.77	x	2.89	x	45.59	x	0.4	x	0.8	=	29.22	(80)
West	0.9x	0.77	x	2.88	x	24.49	x	0.4	x	0.8	=	15.64	(80)
West	0.9x	0.77	x	4.08	x	24.49	x	0.4	x	0.8	=	22.16	(80)
West	0.9x	0.77	x	2.89	x	24.49	x	0.4	x	0.8	=	15.69	(80)
West	0.9x	0.77	x	2.88	x	16.15	x	0.4	x	0.8	=	10.32	(80)
West	0.9x	0.77	x	4.08	x	16.15	x	0.4	x	0.8	=	14.61	(80)
West	0.9x	0.77	x	2.89	x	16.15	x	0.4	x	0.8	=	10.35	(80)

DRAFT

Solar gains in watts, calculated for each month (83)m = Sum(74)m …(82)m

(83)m=	117.9	230.64	379.83	553.96	678.9	694.98	661.65	568.34	441.76	273.67	147.01	96.96	(83)

Total gains – internal and solar (84)m = (73)m + (83)m , watts

(84)m=	810.21	917.8	1039.71	1171.21	1251.9	1228.69	1172.61	1088.75	986.89	861.67	782.73	769.35	(84)

7. Mean internal temperature (heating season)

Temperature during heating periods in the living area from Table 9, Th1 (°C) 21 (85)

Utilisation factor for gains for living area, h1,m (see Table 9a)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec

(86)m=	1	0.99	0.98	0.92	0.78	0.58	0.42	0.47	0.75	0.96	0.99	1	(86)

Mean internal temperature in living area T1 (follow steps 3 to 7 in Table 9c)

(87)m=	20.28	20.38	20.56	20.77	20.9	20.95	20.96	20.95	20.93	20.74	20.47	20.27	(87)

Temperature during heating periods in rest of dwelling from Table 9, Th2 (°C)

(88)m=	20.14	20.14	20.15	20.16	20.16	20.18	20.18	20.18	20.17	20.16	20.16	20.15	(88)

Utilisation factor for gains for rest of dwelling, h2,m (see Table 9a)

(89)m=	1	0.99	0.97	0.9	0.73	0.51	0.34	0.39	0.68	0.94	0.99	1	(89)

Mean internal temperature in the rest of dwelling T2 (follow steps 3 to 7 in Table 9c)

(90)m=	19.48	19.59	19.76	19.97	20.09	20.13	20.13	20.13	20.11	19.95	19.68	19.47	(90)

fLA = Living area ÷ (4) = 0.16 (91)

Mean internal temperature (for the whole dwelling) = fLA × T1 + (1 – fLA) × T2

(92)m=	19.61	19.71	19.89	20.1	20.22	20.26	20.26	20.27	20.24	20.08	19.81	19.6	(92)

Apply adjustment to the mean internal temperature from Table 4e, where appropriate

(93)m=	19.61	19.71	19.89	20.1	20.22	20.26	20.26	20.27	20.24	20.08	19.81	19.6	(93)

8. Space heating requirement

Set Ti to the mean internal temperature obtained at step 11 of Table 9b, so that Ti,m=(76)m and re-calculate the utilisation factor for gains using Table 9a

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	
Utilisation factor for gains, hm:													
(94)m=	1	0.99	0.97	0.9	0.74	0.52	0.35	0.4	0.68	0.94	0.99	1	(94)
Useful gains, hmGm , W = (94)m x (84)m													
(95)m=	806.52	908.44	1008.65	1051.55	922.4	635.01	414.09	434.97	672.97	808.94	774.75	766.73	(95)
Monthly average external temperature from Table 8													
(96)m=	4.3	4.9	6.5	8.9	11.7	14.6	16.6	16.4	14.1	10.6	7.1	4.2	(96)
Heat loss rate for mean internal temperature, Lm , W =[(39)m x [(93)m– (96)m]													
(97)m=	1810.43	1745.98	1572.67	1293.44	980.35	640.47	414.52	435.86	699.73	1090.87	1472.63	1797.09	(97)
Space heating requirement for each month, kWh/month = 0.024 x [(97)m – (95)m] x (41)m													
(98)m=	746.91	562.83	419.63	174.15	43.12	0	0	0	0	209.76	502.47	766.59	

Total per year (kWh/year) = Sum(98)$_{1...5,9...12}$ = 3425.47 (98)

Space heating requirement in kWh/m²/year 26.97 (99)

8c. Space cooling requirement

Calculated for June, July and August. See Table 10b

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	
Heat loss rate Lm (calculated using 25°C internal temperature and external temperature from Table 10)													
(100)m=	0	0	0	0	0	1063.56	837.27	856.92	0	0	0	0	(100)
Utilisation factor for loss hm													
(101)m=	0	0	0	0	0	0.94	0.97	0.96	0	0	0	0	(101)
Useful loss, hmLm (Watts) = (100)m x (101)m													
(102)m=	0	0	0	0	0	1000.04	815.71	821.85	0	0	0	0	(102)
Gains (solar gains calculated for applicable weather region, see Table 10)													
(103)m=	0	0	0	0	0	1346.02	1284.31	1184.71	0	0	0	0	(103)
Space cooling requirement for month, whole dwelling, continuous (kWh) = 0.024 x [(103)m – (102)m] x (41)m set (104)m to zero if (104)m < 3 × (98)m													
(104)m=	0	0	0	0	0	249.11	348.64	269.96	0	0	0	0	

Total = Sum(104) = 867.71 (104)

DRAFT

SAP WorkSheet: New dwelling design stage

Cooled fraction — f C = cooled area ÷ (4) = 0.6 (105)

Intermittency factor (Table 10b)

(106)m=	0	0	0	0	0	0.25	0.25	0.25	0	0	0	0

Total = Sum(104) = 0 (106)

Space cooling requirement for month = (104)m × (105) × (106)m

(107)m=	0	0	0	0	0	37.56	52.57	40.71	0	0	0	0

Total = Sum(107) = 130.84 (107)

Space cooling requirement in kWh/m²/year — (107) ÷ (4) = 1.03 (108)

9a. Energy requirements – Individual heating systems including micro-CHP)

Space heating:

Fraction of space heat from secondary/supplementary system — 0 (201)

Fraction of space heat from main system(s) — (202) = 1 – (201) = 1 (202)

Fraction of total heating from main system 1 — (204) = (202) × [1 – (203)] = 1 (204)

Efficiency of main space heating system 1 — 286.65 (206)

Efficiency of secondary/supplementary heating system, % — 0 (208)

Cooling System Energy Efficiency Ratio — 6.25 (209)

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	kWh/year
Space heating requirement (calculated above)	746.91	562.83	419.63	174.15	43.12	0	0	0	0	209.76	502.47	766.59	
(211)m = {[(98)m x (204)] } x 100 ÷ (206) (211)	260.57	196.35	146.39	60.76	15.04	0	0	0	0	73.18	175.29	267.44	

Total (kWh/year) =Sum(211)$_{1...5,10...12}$ = 1195.02 (211)

Space heating fuel (secondary), kWh/month
= {[(98)m x (201)] } x 100 ÷ (208)

(215)m=	0	0	0	0	0	0	0	0	0	0	0	0	

Total (kWh/year) =Sum(215)$_{1...5,10...12}$ = 0 (215)

Water heating

Output from water heater (calculated above)

	199.77	175.64	183.43	163	158.7	140.31	133.34	148.27	148.62	169.09	180.6	194.48

Efficiency of water heater — 262.3 (216)

(217)m=	262.3	262.3	262.3	262.3	262.3	262.3	262.3	262.3	262.3	262.3	262.3	262.3	(217)

Fuel for water heating, kWh/month
(219)m = (64)m x 100 ÷ (217)m

(219)m=	76.16	66.96	69.93	62.14	60.5	53.49	50.84	56.53	56.66	64.47	68.85	74.15	

Total = Sum(219a)$_{1...12}$ = 760.69 (219)

Space cooling fuel, kWh/month.
(221)m = (107)m÷ (209)

(221)m=	0	0	0	0	0	6.01	8.41	6.51	0	0	0	0	

Total = Sum(221)$_{6...8}$ = 20.93 (221)

Annual totals	**kWh/year**	**kWh/year**
Space heating fuel used, main system 1		1195.02
Water heating fuel used		760.69
Space cooling fuel used		20.93

DRAFT

SAP WorkSheet: New dwelling design stage

Electricity for pumps, fans and electric keep-hot			
mechanical ventilation - balanced, extract or positive input from outside	266.3		(230a)
Total electricity for the above, kWh/year	sum of (230a)…(230g) =	266.3	(231)
Electricity for lighting		462.99	(232)
Electricity generated by PVs		-405.9	(233)
Total delivered energy for all uses (211)...(221) + (231) + (232)...(237b) =		2300.04	(338)

10a. Fuel costs - individual heating systems:

	Fuel kWh/year		Fuel Price (Table 12)		Fuel Cost £/year	
Space heating - main system 1	(211)	x	13.19	x 0.01 =	157.62	(240)
Space heating - main system 2	(213)	x	0	x 0.01 =	0	(241)
Space heating - secondary	(215)	x	13.19	x 0.01 =	0	(242)
Water heating cost (other fuel)	(219)		13.19	x 0.01 =	100.34	(247)
Space cooling	(221)		13.19	x 0.01 =	2.76	(248)
Pumps, fans and electric keep-hot	(231)		13.19	x 0.01 =	35.13	(249)
(if off-peak tariff, list each of (230a) to (230g) separately as applicable and apply fuel price according to Table 12a						
Energy for lighting	(232)		13.19	x 0.01 =	61.07	(250)
Additional standing charges (Table 12)					0	(251)
	one of (233) to (235) x)		13.19	x 0.01 =	-53.54	(252)
Appendix Q items: repeat lines (253) and (254) as needed						
Total energy cost	(245)...(247) + (250)...(254) =				303.37	(255)

DRAFT

11a. SAP rating - individual heating systems

Energy cost deflator (Table 12)		0.42 (256)
Energy cost factor (ECF)	[(255) x (256)] ÷ [(4) + 45.0] =	0.74 (257)
SAP rating (Section 12)		89.67 (258)

12a. CO2 emissions – Individual heating systems including micro-CHP

	Energy kWh/year		Emission factor kg CO2/kWh		Emissions kg CO2/year	
Space heating (main system 1)	(211)	x	0.519	=	620.22	(261)
Space heating (secondary)	(215)	x	0.519	=	0	(263)
Water heating	(219)	x	0.519	=	394.8	(264)
Space and water heating	(261) + (262) + (263) + (264) =				1015.01	(265)
Space cooling	(221)	x	0.519	=	10.86	(266)
Electricity for pumps, fans and electric keep-hot	(231)	x	0.519	=	138.21	(267)
Electricity for lighting	(232)	x	0.519	=	240.29	(268)
Energy saving/generation technologies						

SAP WorkSheet: New dwelling design stage

Item 1	0.519	=	-210.66	(269)
Total CO2, kg/year	sum of (265)…(271) =		1193.72	(272)
CO2 emissions per m²	(272) ÷ (4) =		9.4	(273)
EI rating (section 14)			91	(274)

13a. Primary Energy

	Energy kWh/year		**Primary** factor		**P. Energy** kWh/year	
Space heating (main system 1)	(211)	x	3.07	=	3668.71	(261)
Space heating (secondary)	(215)	x	3.07	=	0	(263)
Energy for water heating	(219)	x	3.07	=	2335.33	(264)
Space and water heating	(261) + (262) + (263) + (264) =				6004.04	(265)
Space cooling	(221)	x	3.07	=	64.27	(266)
Electricity for pumps, fans and electric keep-hot	(231)	x	3.07	=	817.55	(267)
Electricity for lighting	(232)	x	0	=	1421.37	(268)
Energy saving/generation technologies						
Item 1			3.07	=	-1246.12	(269)
‘Total Primary Energy	sum of (265)…(271) =				7061.11	(272)
Primary energy kWh/m²/year	(272) ÷ (4) =				55.6	(273)

DRAFT

DER WorkSheet: New dwelling design stage

User Details:

Assessor Name: **Stroma Number:**

Software Name: Stroma FSAP 2012 **Software Version:** Version: 1.0.5.57

Property Address: Gregs Bakery D12 - Townhouse

Address : Twickenham London Square, London

1. Overall dwelling dimensions:

	Area(m²)		Av. Height(m)		Volume(m³)	
Ground floor	31	(1a) x	2.5	(2a) =	77.5	(3a)
First floor	54	(1b) x	2.5	(2b) =	135	(3b)
Second floor	42	(1c) x	2.5	(2c) =	105	(3c)
Total floor area TFA = (1a)+(1b)+(1c)+(1d)+(1e)+.....(1n)	127	(4)				
Dwelling volume			(3a)+(3b)+(3c)+(3d)+(3e)+.....(3n) =		317.5	(5)

2. Ventilation rate:

	main heating		secondary heating		other		total		m³ per hour	
Number of chimneys	0	+	0	+	0	=	0	x 40 =	0	(6a)
Number of open flues	0	+	0	+	0	=	0	x 20 =	0	(6b)
Number of intermittent fans							0	x 10 =	0	(7a)
Number of passive vents							0	x 10 =	0	(7b)
Number of flueless gas fires							0	x 40 =	0	(7c)

			Air changes per hour	
Infiltration due to chimneys, flues and fans =	(6a)+(6b)+(7a)+(7b)+(7c) =	0	÷ (5) =	0 (8)
If a pressurisation test has been carried out or is intended, proceed to (17), otherwise continue from (9) to (16)				
Number of storeys in the dwelling (ns)				0 (9)
Additional infiltration			[(9)-1]x0.1 =	0 (10)
Structural infiltration: 0.25 for steel or timber frame or 0.35 for masonry construction				0 (11)
if both types of wall are present, use the value corresponding to the greater wall area (after deducting areas of openings); if equal user 0.35				
If suspended wooden floor, enter 0.2 (unsealed) or 0.1 (sealed), else enter 0				0 (12)
If no draught lobby, enter 0.05, else enter 0				0 (13)
Percentage of windows and doors draught stripped				0 (14)
Window infiltration	0.25 - [0.2 x (14) ÷ 100] =			0 (15)
Infiltration rate	(8) + (10) + (11) + (12) + (13) + (15) =			0 (16)
Air permeability value, q50, expressed in cubic metres per hour per square metre of envelope area				3 (17)
If based on air permeability value, then	(18) = [(17) ÷ 20]+(8), otherwise (18) = (16)			0.15 (18)
Air permeability value applies if a pressurisation test has been done or a degree air permeability is being used				
Number of sides sheltered				0 (19)
Shelter factor	(20) = 1 - [0.075 x (19)] =			1 (20)
Infiltration rate incorporating shelter factor	(21) = (18) x (20) =			0.15 (21)

Infiltration rate modified for monthly wind speed

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec

Monthly average wind speed from Table 7

(22)m=	5.1	5	4.9	4.4	4.3	3.8	3.8	3.7	4	4.3	4.5	4.7

DRAFT

DER WorkSheet: New dwelling design stage

Wind Factor (22a)m = (22)m ÷ 4

(22a)m=	1.27	1.25	1.23	1.1	1.08	0.95	0.95	0.92	1	1.08	1.12	1.18

Adjusted infiltration rate (allowing for shelter and wind speed) = (21a) x (22a)m

0.19	0.19	0.18	0.16	0.16	0.14	0.14	0.14	0.15	0.16	0.17	0.18

Calculate effective air change rate for the applicable case

If mechanical ventilation: 0.5 (23a)

If exhaust air heat pump using Appendix N, (23b) = (23a) × Fmv (equation (N5)) , otherwise (23b) = (23a) 0.5 (23b)

If balanced with heat recovery: efficiency in % allowing for in-use factor (from Table 4h) = 78.2 (23c)

a) If balanced mechanical ventilation with heat recovery (MVHR) (24a)m = (22b)m + (23b) × [1 – (23c) ÷ 100]

(24a)m=	0.3	0.3	0.29	0.27	0.27	0.25	0.25	0.25	0.26	0.27	0.28	0.29	(24a)

b) If balanced mechanical ventilation without heat recovery (MV) (24b)m = (22b)m + (23b)

(24b)m=	0	0	0	0	0	0	0	0	0	0	0	0	(24b)

c) If whole house extract ventilation or positive input ventilation from outside
if (22b)m < 0.5 × (23b), then (24c) = (23b); otherwise (24c) = (22b) m + 0.5 × (23b)

(24c)m=	0	0	0	0	0	0	0	0	0	0	0	0	(24c)

d) If natural ventilation or whole house positive input ventilation from loft
if (22b)m = 1, then (24d)m = (22b)m otherwise (24d)m = 0.5 + [(22b)m² x 0.5]

(24d)m=	0	0	0	0	0	0	0	0	0	0	0	0	(24d)

Effective air change rate - enter (24a) or (24b) or (24c) or (24d) in box (25)

(25)m=	0.3	0.3	0.29	0.27	0.27	0.25	0.25	0.25	0.26	0.27	0.28	0.29	(25)

DRAFT

3. Heat losses and heat loss parameter:

ELEMENT	Gross area (m²)	Openings m²	Net Area A ,m²		U-value W/m2K		A X U (W/K)	k-value kJ/m²·K	A X k kJ/K	
Doors			2.1	x	1.3	=	2.73			(26)
Windows Type 1			2.88	x1/[1/(1.3)+ 0.04]		=	3.56			(27)
Windows Type 2			0.38	x1/[1/(1.3)+ 0.04]		=	0.47			(27)
Windows Type 3			4.08	x1/[1/(1.3)+ 0.04]		=	5.04			(27)
Windows Type 4			2.16	x1/[1/(1.3)+ 0.04]		=	2.67			(27)
Windows Type 5			4.08	x1/[1/(1.3)+ 0.04]		=	5.04			(27)
Windows Type 6			2.16	x1/[1/(1.3)+ 0.04]		=	2.67			(27)
Windows Type 7			2.89	x1/[1/(1.3)+ 0.04]		=	3.57			(27)
Windows Type 8			1.55	x1/[1/(1.3)+ 0.04]		=	1.92			(27)
Windows Type 9			2.89	x1/[1/(1.3)+ 0.04]		=	3.57			(27)
Windows Type 10			4	x1/[1/(1.3)+ 0.04]		=	4.94			(27)
Floor Type 1			31	x	0.12	=	3.72			(28)
Floor Type 2			17.2	x	0.12	=	2.064			(28)
Floor Type 3			1.5	x	0.12	=	0.18			(28)
Walls Type1	50.85	9.85	41	x	0.15	=	6.15			(29)
Walls Type2	9.24	6.48	2.76	x	0.15	=	0.41			(29)
Walls Type3	33.9	12.84	21.06	x	0.15	=	3.16			(29)

DER WorkSheet: New dwelling design stage

Walls Type4	8.4	0	8.4	x	0.14	=	1.2		(29)
Walls Type5	18.3	0	18.3	x	0.14	=	2.62		(29)
Roof Type1	27.36	0	27.36	x	0.15	=	4.1		(30)
Roof Type2	71.82	0	71.82	x	0.15	=	10.77		(30)
Total area of elements, m²			269.57						(31)
Party wall			7.75	x	0	=	0		(32)
Party wall			24	x	0	=	0		(32)
Party wall			17.75	x	0	=	0		(32)
Party wall			24	x	0	=	0		(32)
Party wall			24	x	0	=	0		(32)
Party wall			17.75	x	0	=	0		(32)
Internal wall **			11.25						(32c)
Internal wall **			9						(32c)
Internal wall **			16						(32c)
Internal wall **			23						(32c)
Internal wall **			14						(32c)
Internal wall **			16.5						(32c)
Internal wall **			10.75						(32c)
Internal wall **			11.13						(32c)
Internal wall **			14						(32c)
Internal wall **			22						(32c)
Internal wall **			15						(32c)
Internal wall **			23						(32c)
Internal floor			31						(32d)
Internal floor			42						(32d)
Internal ceiling			73						(32e)

DRAFT

** for windows and roof windows, use effective window U-value calculated using formula 1/[(1/U-value)+0.04] as given in paragraph 3.2*

*** include the areas on both sides of internal walls and partitions*

Fabric heat loss, W/K = S (A x U) (26)…(30) + (32) = 70.56 (33)

Heat capacity Cm = S(A x k) ((28)…(30) + (32) + (32a)…(32e) = 31647.63 (34)

Thermal mass parameter (TMP = Cm ÷ TFA) in kJ/m²K Indicative Value: Medium 250 (35)

For design assessments where the details of the construction are not known precisely the indicative values of TMP in Table 1f can be used instead of a detailed calculation.

Thermal bridges : S (L x Y) calculated using Appendix K 16.23 (36)

if details of thermal bridging are not known (36) = 0.05 x (31)

Total fabric heat loss (33) + (36) = 86.79 (37)

Ventilation heat loss calculated monthly (38)m = 0.33 × (25)m x (5)

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	
(38)m=	31.46	31.07	30.67	28.71	28.32	26.35	26.35	25.96	27.14	28.32	29.1	29.89	(38)

Heat transfer coefficient, W/K (39)m = (37) + (38)m

(39)m=	118.25	117.86	117.47	115.5	115.11	113.14	113.14	112.75	113.93	115.11	115.9	116.68	

Average = Sum(39)$_{1...12}$ /12= 115.4 (39)

DER WorkSheet: New dwelling design stage

Heat loss parameter (HLP), W/m²K (40)m = (39)m ÷ (4)

(40)m=	0.93	0.93	0.92	0.91	0.91	0.89	0.89	0.89	0.9	0.91	0.91	0.92

Average = Sum(40)$_{1...12}$ /12= 0.91 (40)

Number of days in month (Table 1a)

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
(41)m=	31	28	31	30	31	30	31	31	30	31	30	31

(41)

4. Water heating energy requirement: kWh/year:

Assumed occupancy, N 2.89 (42)
if TFA > 13.9, N = 1 + 1.76 x [1 - exp(-0.000349 x (TFA -13.9)2)] + 0.0013 x (TFA -13.9)
if TFA £ 13.9, N = 1

Annual average hot water usage in litres per day Vd,average = (25 x N) + 36 102.76 (43)
Reduce the annual average hot water usage by 5% if the dwelling is designed to achieve a water use target of not more that 125 litres per person per day (all water use, hot and cold)

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
(44)m=	113.04	108.93	104.82	100.71	96.6	92.48	92.48	96.6	100.71	104.82	108.93	113.04

Hot water usage in litres per day for each month Vd,m = factor from Table 1c x (43)

Total = Sum(44)$_{1...12}$ = 1233.13 (44)

Energy content of hot water used - calculated monthly = 4.190 x Vd,m x nm x DTm / 3600 kWh/month (see Tables 1b, 1c, 1d)

(45)m=	167.63	146.61	151.29	131.9	126.56	109.21	101.2	116.13	117.51	136.95	149.49	162.34

Total = Sum(45)$_{1...12}$ = 1616.83 (45)

If instantaneous water heating at point of use (no hot water storage), enter 0 in boxes (46) to (61)

(46)m=	25.14	21.99	22.69	19.78	18.98	16.38	15.18	17.42	17.63	20.54	22.42	24.35

(46)

Water storage loss:

Storage volume (litres) including any solar or WWHRS storage within same vessel 245 (47)

If community heating and no tank in dwelling, enter 110 litres in (47)
Otherwise if no stored hot water (this includes instantaneous combi boilers) enter '0' in (47)
Water storage loss:

a) If manufacturer's declared loss factor is known (kWh/day): 0.54 (48)

Temperature factor from Table 2b 1.0368 (49)

Energy lost from water storage, kWh/year (48) x (49) = 0 (50)

b) If manufacturer's declared cylinder loss factor is not known:

Hot water storage loss factor from Table 2 (kWh/litre/day) 0 (51)

If community heating see section 4.3

Volume factor from Table 2a 0 (52)

Temperature factor from Table 2b 0 (53)

Energy lost from water storage, kWh/year (47) x (51) x (52) x (53) = 0 (54)

Enter (50) or (54) in (55) 1.04 (55)

Water storage loss calculated for each month ((56)m = (55) × (41)m

(56)m=	32.14	29.03	32.14	31.1	32.14	31.1	32.14	32.14	31.1	32.14	31.1	32.14

(56)

If cylinder contains dedicated solar storage, (57)m = (56)m x [(50) – (H11)] ÷ (50), else (57)m = (56)m where (H11) is from Appendix H

(57)m=	32.14	29.03	32.14	31.1	32.14	31.1	32.14	32.14	31.1	32.14	31.1	32.14

(57)

Primary circuit loss (annual) from Table 3 0 (58)

Primary circuit loss calculated for each month (59)m = (58) ÷ 365 × (41)m
(modified by factor from Table H5 if there is solar water heating and a cylinder thermostat)

(59)m=	0	0	0	0	0	0	0	0	0	0	0	0

(59)

DRAFT

DER WorkSheet: New dwelling design stage

Combi loss calculated for each month (61)m = (60) ÷ 365 × (41)m

(61)m=	0	0	0	0	0	0	0	0	0	0	0	0	(61)

Total heat required for water heating calculated for each month (62)m = 0.85 × (45)m + (46)m + (57)m + (59)m + (61)m

(62)m=	199.77	175.64	183.43	163	158.7	140.31	133.34	148.27	148.62	169.09	180.6	194.48	(62)

Solar DHW input calculated using Appendix G or Appendix H (negative quantity) (enter '0' if no solar contribution to water heating)

(add additional lines if FGHRS and/or WWHRS applies, see Appendix G)

(63)m=	0	0	0	0	0	0	0	0	0	0	0	0	(63)

Output from water heater

(64)m=	199.77	175.64	183.43	163	158.7	140.31	133.34	148.27	148.62	169.09	180.6	194.48	

Output from water heater (annual)$_{1...12}$ 1995.26 (64)

Heat gains from water heating, kWh/month 0.25 ´ [0.85 × (45)m + (61)m] + 0.8 x [(46)m + (57)m + (59)m]

(65)m=	55.74	48.75	50.3	43.86	42.08	36.31	33.65	38.61	39.07	45.54	49.71	53.98	(65)

include (57)m in calculation of (65)m only if cylinder is in the dwelling or hot water is from community heating

5. Internal gains (see Table 5 and 5a):

Metabolic gains (Table 5), Watts

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	
(66)m=	144.34	144.34	144.34	144.34	144.34	144.34	144.34	144.34	144.34	144.34	144.34	144.34	(66)

Lighting gains (calculated in Appendix L, equation L9 or L9a), also see Table 5

(67)m=	26.22	23.29	18.94	14.34	10.72	9.05	9.78	12.71	17.06	21.66	25.28	26.94	(67)

Appliances gains (calculated in Appendix L, equation L13 or L13a), also see Table 5

(68)m=	294.07	297.12	289.43	273.06	252.39	232.97	220	216.95	224.64	241.01	261.67	281.09	(68)

Cooking gains (calculated in Appendix L, equation L15 or L15a), also see Table 5

(69)m=	37.43	37.43	37.43	37.43	37.43	37.43	37.43	37.43	37.43	37.43	37.43	37.43	(69)

Pumps and fans gains (Table 5a)

(70)m=	0	0	0	0	0	0	0	0	0	0	0	0	(70)

Losses e.g. evaporation (negative values) (Table 5)

(71)m=	-115.47	-115.47	-115.47	-115.47	-115.47	-115.47	-115.47	-115.47	-115.47	-115.47	-115.47	-115.47	(71)

Water heating gains (Table 5)

(72)m=	74.92	72.54	67.61	60.91	56.56	50.43	45.23	51.9	54.27	61.21	69.04	72.55	(72)

Total internal gains = (66)m + (67)m + (68)m + (69)m + (70)m + (71)m + (72)m

(73)m=	461.5	459.25	442.28	414.61	385.97	358.75	341.3	347.85	362.26	390.17	422.28	446.89	(73)

6. Solar gains:

Solar gains are calculated using solar flux from Table 6a and associated equations to convert to the applicable orientation.

Orientation:	Access Factor Table 6d		Area m²		Flux Table 6a		g_ Table 6b		FF Table 6c		Gains (W)	
East	0.9x 0.77	x	0.38	x	19.64	x	0.4	x	0.8	=	1.66	(76)
East	0.9x 0.77	x	2.16	x	19.64	x	0.4	x	0.8	=	9.41	(76)
East	0.9x 0.77	x	4.08	x	19.64	x	0.4	x	0.8	=	17.77	(76)
East	0.9x 0.77	x	2.16	x	19.64	x	0.4	x	0.8	=	9.41	(76)
East	0.9x 0.77	x	1.55	x	19.64	x	0.4	x	0.8	=	6.75	(76)

DRAFT

DER WorkSheet: New dwelling design stage

East	0.9x	0.77	x	2.89	x	19.64	x	0.4	x	0.8	=	12.59	(76)
East	0.9x	0.77	x	4	x	19.64	x	0.4	x	0.8	=	17.42	(76)
East	0.9x	0.77	x	0.38	x	38.42	x	0.4	x	0.8	=	3.24	(76)
East	0.9x	0.77	x	2.16	x	38.42	x	0.4	x	0.8	=	18.4	(76)
East	0.9x	0.77	x	4.08	x	38.42	x	0.4	x	0.8	=	34.76	(76)
East	0.9x	0.77	x	2.16	x	38.42	x	0.4	x	0.8	=	18.4	(76)
East	0.9x	0.77	x	1.55	x	38.42	x	0.4	x	0.8	=	13.21	(76)
East	0.9x	0.77	x	2.89	x	38.42	x	0.4	x	0.8	=	24.62	(76)
East	0.9x	0.77	x	4	x	38.42	x	0.4	x	0.8	=	34.08	(76)
East	0.9x	0.77	x	0.38	x	63.27	x	0.4	x	0.8	=	5.33	(76)
East	0.9x	0.77	x	2.16	x	63.27	x	0.4	x	0.8	=	30.31	(76)
East	0.9x	0.77	x	4.08	x	63.27	x	0.4	x	0.8	=	57.25	(76)
East	0.9x	0.77	x	2.16	x	63.27	x	0.4	x	0.8	=	30.31	(76)
East	0.9x	0.77	x	1.55	x	63.27	x	0.4	x	0.8	=	21.75	(76)
East	0.9x	0.77	x	2.89	x	63.27	x	0.4	x	0.8	=	40.55	(76)
East	0.9x	0.77	x	4	x	63.27	x	0.4	x	0.8	=	56.13	(76)
East	0.9x	0.77	x	0.38	x	92.28	x	0.4	x	0.8	=	7.78	(76)
East	0.9x	0.77	x	2.16	x	92.28	x	0.4	x	0.8	=	44.2	(76)
East	0.9x	0.77	x	4.08	x	92.28	x	0.4	x	0.8	=	83.49	(76)
East	0.9x	0.77	x	2.16	x	92.28	x	0.4	x	0.8	=	44.2	(76)
East	0.9x	0.77	x	1.55	x	92.28	x	0.4	x	0.8	=	31.72	(76)
East	0.9x	0.77	x	2.89	x	92.28	x	0.4	x	0.8	=	59.14	(76)
East	0.9x	0.77	x	4	x	92.28	x	0.4	x	0.8	=	81.86	(76)
East	0.9x	0.77	x	0.38	x	113.09	x	0.4	x	0.8	=	9.53	(76)
East	0.9x	0.77	x	2.16	x	113.09	x	0.4	x	0.8	=	54.17	(76)
East	0.9x	0.77	x	4.08	x	113.09	x	0.4	x	0.8	=	102.32	(76)
East	0.9x	0.77	x	2.16	x	113.09	x	0.4	x	0.8	=	54.17	(76)
East	0.9x	0.77	x	1.55	x	113.09	x	0.4	x	0.8	=	38.87	(76)
East	0.9x	0.77	x	2.89	x	113.09	x	0.4	x	0.8	=	72.48	(76)
East	0.9x	0.77	x	4	x	113.09	x	0.4	x	0.8	=	100.32	(76)
East	0.9x	0.77	x	0.38	x	115.77	x	0.4	x	0.8	=	9.76	(76)
East	0.9x	0.77	x	2.16	x	115.77	x	0.4	x	0.8	=	55.45	(76)
East	0.9x	0.77	x	4.08	x	115.77	x	0.4	x	0.8	=	104.75	(76)
East	0.9x	0.77	x	2.16	x	115.77	x	0.4	x	0.8	=	55.45	(76)
East	0.9x	0.77	x	1.55	x	115.77	x	0.4	x	0.8	=	39.79	(76)
East	0.9x	0.77	x	2.89	x	115.77	x	0.4	x	0.8	=	74.2	(76)
East	0.9x	0.77	x	4	x	115.77	x	0.4	x	0.8	=	102.69	(76)
East	0.9x	0.77	x	0.38	x	110.22	x	0.4	x	0.8	=	9.29	(76)
East	0.9x	0.77	x	2.16	x	110.22	x	0.4	x	0.8	=	52.79	(76)
East	0.9x	0.77	x	4.08	x	110.22	x	0.4	x	0.8	=	99.72	(76)
East	0.9x	0.77	x	2.16	x	110.22	x	0.4	x	0.8	=	52.79	(76)

DRAFT

DER WorkSheet: New dwelling design stage

East	0.9x	0.77	x	1.55	x	110.22	x	0.4	x	0.8	=	37.89	(76)
East	0.9x	0.77	x	2.89	x	110.22	x	0.4	x	0.8	=	70.64	(76)
East	0.9x	0.77	x	4	x	110.22	x	0.4	x	0.8	=	97.77	(76)
East	0.9x	0.77	x	0.38	x	94.68	x	0.4	x	0.8	=	7.98	(76)
East	0.9x	0.77	x	2.16	x	94.68	x	0.4	x	0.8	=	45.35	(76)
East	0.9x	0.77	x	4.08	x	94.68	x	0.4	x	0.8	=	85.66	(76)
East	0.9x	0.77	x	2.16	x	94.68	x	0.4	x	0.8	=	45.35	(76)
East	0.9x	0.77	x	1.55	x	94.68	x	0.4	x	0.8	=	32.54	(76)
East	0.9x	0.77	x	2.89	x	94.68	x	0.4	x	0.8	=	60.68	(76)
East	0.9x	0.77	x	4	x	94.68	x	0.4	x	0.8	=	83.98	(76)
East	0.9x	0.77	x	0.38	x	73.59	x	0.4	x	0.8	=	6.2	(76)
East	0.9x	0.77	x	2.16	x	73.59	x	0.4	x	0.8	=	35.25	(76)
East	0.9x	0.77	x	4.08	x	73.59	x	0.4	x	0.8	=	66.58	(76)
East	0.9x	0.77	x	2.16	x	73.59	x	0.4	x	0.8	=	35.25	(76)
East	0.9x	0.77	x	1.55	x	73.59	x	0.4	x	0.8	=	25.29	(76)
East	0.9x	0.77	x	2.89	x	73.59	x	0.4	x	0.8	=	47.16	(76)
East	0.9x	0.77	x	4	x	73.59	x	0.4	x	0.8	=	65.28	(76)
East	0.9x	0.77	x	0.38	x	45.59	x	0.4	x	0.8	=	3.84	(76)
East	0.9x	0.77	x	2.16	x	45.59	x	0.4	x	0.8	=	21.84	(76)
East	0.9x	0.77	x	4.08	x	45.59	x	0.4	x	0.8	=	41.25	(76)
East	0.9x	0.77	x	2.16	x	45.59	x	0.4	x	0.8	=	21.84	(76)
East	0.9x	0.77	x	1.55	x	45.59	x	0.4	x	0.8	=	15.67	(76)
East	0.9x	0.77	x	2.89	x	45.59	x	0.4	x	0.8	=	29.22	(76)
East	0.9x	0.77	x	4	x	45.59	x	0.4	x	0.8	=	40.44	(76)
East	0.9x	0.77	x	0.38	x	24.49	x	0.4	x	0.8	=	2.06	(76)
East	0.9x	0.77	x	2.16	x	24.49	x	0.4	x	0.8	=	11.73	(76)
East	0.9x	0.77	x	4.08	x	24.49	x	0.4	x	0.8	=	22.16	(76)
East	0.9x	0.77	x	2.16	x	24.49	x	0.4	x	0.8	=	11.73	(76)
East	0.9x	0.77	x	1.55	x	24.49	x	0.4	x	0.8	=	8.42	(76)
East	0.9x	0.77	x	2.89	x	24.49	x	0.4	x	0.8	=	15.69	(76)
East	0.9x	0.77	x	4	x	24.49	x	0.4	x	0.8	=	21.72	(76)
East	0.9x	0.77	x	0.38	x	16.15	x	0.4	x	0.8	=	1.36	(76)
East	0.9x	0.77	x	2.16	x	16.15	x	0.4	x	0.8	=	7.74	(76)
East	0.9x	0.77	x	4.08	x	16.15	x	0.4	x	0.8	=	14.61	(76)
East	0.9x	0.77	x	2.16	x	16.15	x	0.4	x	0.8	=	7.74	(76)
East	0.9x	0.77	x	1.55	x	16.15	x	0.4	x	0.8	=	5.55	(76)
East	0.9x	0.77	x	2.89	x	16.15	x	0.4	x	0.8	=	10.35	(76)
East	0.9x	0.77	x	4	x	16.15	x	0.4	x	0.8	=	14.33	(76)
West	0.9x	0.77	x	2.88	x	19.64	x	0.4	x	0.8	=	12.54	(80)
West	0.9x	0.77	x	4.08	x	19.64	x	0.4	x	0.8	=	17.77	(80)
West	0.9x	0.77	x	2.89	x	19.64	x	0.4	x	0.8	=	12.59	(80)

DRAFT

DER WorkSheet: New dwelling design stage

West	0.9x	0.77	x	2.88	x	38.42	x	0.4	x	0.8	=	24.54	(80)
West	0.9x	0.77	x	4.08	x	38.42	x	0.4	x	0.8	=	34.76	(80)
West	0.9x	0.77	x	2.89	x	38.42	x	0.4	x	0.8	=	24.62	(80)
West	0.9x	0.77	x	2.88	x	63.27	x	0.4	x	0.8	=	40.41	(80)
West	0.9x	0.77	x	4.08	x	63.27	x	0.4	x	0.8	=	57.25	(80)
West	0.9x	0.77	x	2.89	x	63.27	x	0.4	x	0.8	=	40.55	(80)
West	0.9x	0.77	x	2.88	x	92.28	x	0.4	x	0.8	=	58.94	(80)
West	0.9x	0.77	x	4.08	x	92.28	x	0.4	x	0.8	=	83.49	(80)
West	0.9x	0.77	x	2.89	x	92.28	x	0.4	x	0.8	=	59.14	(80)
West	0.9x	0.77	x	2.88	x	113.09	x	0.4	x	0.8	=	72.23	(80)
West	0.9x	0.77	x	4.08	x	113.09	x	0.4	x	0.8	=	102.32	(80)
West	0.9x	0.77	x	2.89	x	113.09	x	0.4	x	0.8	=	72.48	(80)
West	0.9x	0.77	x	2.88	x	115.77	x	0.4	x	0.8	=	73.94	(80)
West	0.9x	0.77	x	4.08	x	115.77	x	0.4	x	0.8	=	104.75	(80)
West	0.9x	0.77	x	2.89	x	115.77	x	0.4	x	0.8	=	74.2	(80)
West	0.9x	0.77	x	2.88	x	110.22	x	0.4	x	0.8	=	70.39	(80)
West	0.9x	0.77	x	4.08	x	110.22	x	0.4	x	0.8	=	99.72	(80)
West	0.9x	0.77	x	2.89	x	110.22	x	0.4	x	0.8	=	70.64	(80)
West	0.9x	0.77	x	2.88	x	94.68	x	0.4	x	0.8	=	60.47	(80)
West	0.9x	0.77	x	4.08	x	94.68	x	0.4	x	0.8	=	85.66	(80)
West	0.9x	0.77	x	2.89	x	94.68	x	0.4	x	0.8	=	60.68	(80)
West	0.9x	0.77	x	2.88	x	73.59	x	0.4	x	0.8	=	47	(80)
West	0.9x	0.77	x	4.08	x	73.59	x	0.4	x	0.8	=	66.58	(80)
West	0.9x	0.77	x	2.89	x	73.59	x	0.4	x	0.8	=	47.16	(80)
West	0.9x	0.77	x	2.88	x	45.59	x	0.4	x	0.8	=	29.12	(80)
West	0.9x	0.77	x	4.08	x	45.59	x	0.4	x	0.8	=	41.25	(80)
West	0.9x	0.77	x	2.89	x	45.59	x	0.4	x	0.8	=	29.22	(80)
West	0.9x	0.77	x	2.88	x	24.49	x	0.4	x	0.8	=	15.64	(80)
West	0.9x	0.77	x	4.08	x	24.49	x	0.4	x	0.8	=	22.16	(80)
West	0.9x	0.77	x	2.89	x	24.49	x	0.4	x	0.8	=	15.69	(80)
West	0.9x	0.77	x	2.88	x	16.15	x	0.4	x	0.8	=	10.32	(80)
West	0.9x	0.77	x	4.08	x	16.15	x	0.4	x	0.8	=	14.61	(80)
West	0.9x	0.77	x	2.89	x	16.15	x	0.4	x	0.8	=	10.35	(80)

DRAFT

Solar gains in watts, calculated for each month (83)m = Sum(74)m …(82)m

(83)m=	117.9	230.64	379.83	553.96	678.9	694.98	661.65	568.34	441.76	273.67	147.01	96.96	(83)

Total gains – internal and solar (84)m = (73)m + (83)m , watts

(84)m=	579.4	689.89	822.11	968.57	1064.87	1053.73	1002.95	916.2	804.02	663.84	569.29	543.85	(84)

7. Mean internal temperature (heating season)

Temperature during heating periods in the living area from Table 9, Th1 (°C) 21 (85)

Utilisation factor for gains for living area, h1,m (see Table 9a)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec

(86)m=	1	1	0.99	0.96	0.86	0.66	0.49	0.56	0.85	0.99	1	1	(86)

Mean internal temperature in living area T1 (follow steps 3 to 7 in Table 9c)

(87)m=	20.15	20.26	20.44	20.68	20.87	20.94	20.95	20.95	20.9	20.64	20.34	20.14	(87)

Temperature during heating periods in rest of dwelling from Table 9, Th2 (°C)

(88)m=	20.14	20.14	20.15	20.16	20.16	20.18	20.18	20.18	20.17	20.16	20.16	20.15	(88)

Utilisation factor for gains for rest of dwelling, h2,m (see Table 9a)

(89)m=	1	1	0.99	0.95	0.82	0.59	0.4	0.46	0.79	0.98	1	1	(89)

Mean internal temperature in the rest of dwelling T2 (follow steps 3 to 7 in Table 9c)

(90)m=	19.35	19.46	19.65	19.89	20.06	20.13	20.13	20.13	20.09	19.86	19.56	19.35	(90)

fLA = Living area ÷ (4) = 0.16 (91)

Mean internal temperature (for the whole dwelling) = fLA × T1 + (1 – fLA) × T2

(92)m=	19.48	19.59	19.77	20.02	20.19	20.26	20.26	20.26	20.22	19.98	19.69	19.47	(92)

Apply adjustment to the mean internal temperature from Table 4e, where appropriate

(93)m=	19.48	19.59	19.77	20.02	20.19	20.26	20.26	20.26	20.22	19.98	19.69	19.47	(93)

8. Space heating requirement

Set Ti to the mean internal temperature obtained at step 11 of Table 9b, so that Ti,m=(76)m and re-calculate the utilisation factor for gains using Table 9a

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	
Utilisation factor for gains, hm:													
(94)m=	1	1	0.99	0.95	0.82	0.6	0.41	0.47	0.79	0.98	1	1	(94)
Useful gains, hmGm , W = (94)m x (84)m													
(95)m=	578.94	688.2	813.7	919.19	872.97	628.26	413.45	433.48	637.1	650.33	568.15	543.56	(95)
Monthly average external temperature from Table 8													
(96)m=	4.3	4.9	6.5	8.9	11.7	14.6	16.6	16.4	14.1	10.6	7.1	4.2	(96)
Heat loss rate for mean internal temperature, Lm , W =[(39)m x [(93)m– (96)m]													
(97)m=	1794.88	1730.9	1559.3	1284.34	977.06	640.02	414.47	435.75	697.32	1080.14	1458.54	1782.02	(97)
Space heating requirement for each month, kWh/month = 0.024 x [(97)m – (95)m] x (41)m													
(98)m=	904.66	700.69	554.73	262.91	77.45	0	0	0	0	319.77	641.09	921.42	

Total per year (kWh/year) = Sum(98)$_{1...5,9...12}$ = 4382.71 (98)

Space heating requirement in kWh/m²/year 34.51 (99)

8c. Space cooling requirement

Calculated for June, July and August. See Table 10b

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	
Heat loss rate Lm (calculated using 25°C internal temperature and external temperature from Table 10)													
(100)m=	0	0	0	0	0	1063.56	837.27	856.92	0	0	0	0	(100)
Utilisation factor for loss hm													
(101)m=	0	0	0	0	0	0.94	0.97	0.96	0	0	0	0	(101)
Useful loss, hmLm (Watts) = (100)m x (101)m													
(102)m=	0	0	0	0	0	1000.04	815.71	821.85	0	0	0	0	(102)
Gains (solar gains calculated for applicable weather region, see Table 10)													
(103)m=	0	0	0	0	0	1346.02	1284.31	1184.71	0	0	0	0	(103)
Space cooling requirement for month, whole dwelling, continuous (kWh) = 0.024 x [(103)m – (102)m] x (41)m set (104)m to zero if (104)m < 3 × (98)m													
(104)m=	0	0	0	0	0	249.11	348.64	269.96	0	0	0	0	

Total = Sum(104) = 867.71 (104)

DRAFT

DER WorkSheet: New dwelling design stage

Cooled fraction — f C = cooled area ÷ (4) = 0.6 (105)

Intermittency factor (Table 10b)

(106)m=	0	0	0	0	0	0.25	0.25	0.25	0	0	0	0

Total = Sum(104)$_{6...8}$ = 0 (106)

Space cooling requirement for month = (104)m × (105) × (106)m

(107)m=	0	0	0	0	0	37.56	52.57	40.71	0	0	0	0

Total = Sum(107)$_{6...8}$ = 130.84 (107)

Space cooling requirement in kWh/m²/year — (107) ÷ (4) = 1.03 (108)

9a. Energy requirements – Individual heating systems including micro-CHP)

Space heating:

Fraction of space heat from secondary/supplementary system — 0 (201)

Fraction of space heat from main system(s) — (202) = 1 – (201) = 1 (202)

Fraction of total heating from main system 1 — (204) = (202) × [1 – (203)] = 1 (204)

Efficiency of main space heating system 1 — 286.65 (206)

Efficiency of secondary/supplementary heating system, % — 0 (208)

Cooling System Energy Efficiency Ratio — 6.25 (209)

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	kWh/year
Space heating requirement (calculated above)	904.66	700.69	554.73	262.91	77.45	0	0	0	0	319.77	641.09	921.42	
(211)m = {[(98)m x (204)] } x 100 ÷ (206) (211)	315.6	244.44	193.52	91.72	27.02	0	0	0	0	111.56	223.65	321.45	

Total (kWh/year) =Sum(211)$_{1...5,10...12}$ = 1528.96 (211)

Space heating fuel (secondary), kWh/month
= {[(98)m x (201)] } x 100 ÷ (208)

(215)m=	0	0	0	0	0	0	0	0	0	0	0	0	

Total (kWh/year) =Sum(215)$_{1...5,10...12}$ = 0 (215)

Water heating

Output from water heater (calculated above)

	199.77	175.64	183.43	163	158.7	140.31	133.34	148.27	148.62	169.09	180.6	194.48

Efficiency of water heater — 262.3 (216)

(217)m=	262.3	262.3	262.3	262.3	262.3	262.3	262.3	262.3	262.3	262.3	262.3	262.3	(217)

Fuel for water heating, kWh/month
(219)m = (64)m x 100 ÷ (217)m

(219)m=	76.16	66.96	69.93	62.14	60.5	53.49	50.84	56.53	56.66	64.47	68.85	74.15	

Total = Sum(219a)$_{1...12}$ = 760.69 (219)

Space cooling fuel, kWh/month.
(221)m = (107)m÷ (209)

(221)m=	0	0	0	0	0	6.01	8.41	6.51	0	0	0	0	

Total = Sum(221)$_{6...8}$ = 20.93 (221)

Annual totals	**kWh/year**	**kWh/year**
Space heating fuel used, main system 1		1528.96
Water heating fuel used		760.69
Space cooling fuel used		20.93

DRAFT

DER WorkSheet: New dwelling design stage

Electricity for pumps, fans and electric keep-hot			
mechanical ventilation - balanced, extract or positive input from outside	266.3		(230a)
Total electricity for the above, kWh/year	sum of (230a)…(230g) =	266.3	(231)
Electricity for lighting		462.99	(232)
Electricity generated by PVs		-405.9	(233)
Total delivered energy for all uses (211)...(221) + (231) + (232)...(237b) =		2633.98	(338)

12a. CO2 emissions – Individual heating systems including micro-CHP

	Energy kWh/year		Emission factor kg CO2/kWh		Emissions kg CO2/year	
Space heating (main system 1)	(211) x		0.519	=	793.53	(261)
Space heating (secondary)	(215) x		0.519	=	0	(263)
Water heating	(219) x		0.519	=	394.8	(264)
Space and water heating	(261) + (262) + (263) + (264) =				1188.33	(265)
Space cooling	(221) x		0.519	=	10.86	(266)
Electricity for pumps, fans and electric keep-hot	(231) x		0.519	=	138.21	(267)
Electricity for lighting	(232) x		0.519	=	240.29	(268)
Energy saving/generation technologies Item 1			0.519	=	-210.66	(269)
Total CO2, kg/year		sum of (265)…(271) =			1367.04	(272)
Dwelling CO2 Emission Rate		(272) ÷ (4) =			10.76	(273)
EI rating (section 14)					89	(274)

DRAFT