

FLOOR TILE CLEANING


WHOLE CERAMIC FLOOR AREA TO BE CLEANED WITH THE FOLLOWING APPLICATION:

WHOLE FLOOR TO BE CLEANED FOLLOWING APPLICATION

SOFTENING AND REMOVING LATEX SCREEDING

CHEMICALLY TREATING AREAS TO REMOVE GLUE RESIDUE AND PAINT SPLASHES

HAND WASHING AND SCRUBBING WITH HAND STEAM CLEANERS



PROPOSED REPAIRS TO FLOOR

CRACK IN CONCRETE, TILES TO BE LIFTED FOR CONCRETE REPAIR AND FLOOR TILING TO BE REINSTATED TO MATCH EXISTING


Crack in tiled floor of conservatory above irregular 'crack' in underside of slab, refer to **Elite Designers' drawing Sk100 and schedule Sk200**

Resin-inject slab and 'stitch' with M8 SS rebars set into recesses cut into top of slab, 400mm long, 30mm down, at 250mm centres

CONSERVATORY FLOOR TILING PROPOSED REPAIRS



Scale 1:20

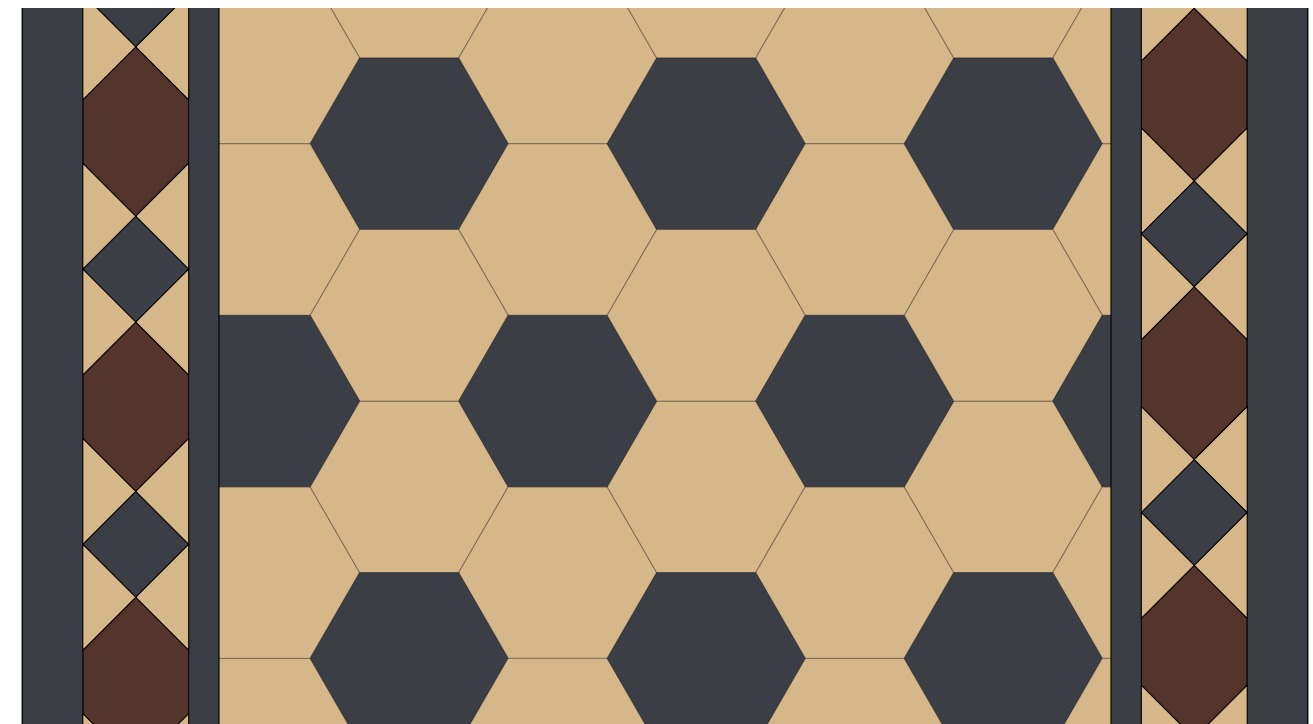

DRAWING OF TILING COLOURATION AND PATTERN