

Indicative only

Tree Protection Area KEEP OUT

Do not move this fence
FROM A COUNTY PLANNING ACT 1990
TREES INCLUDED IN THIS FENCE ARE PROTECTED BY PLANNING CONDITIONS
AND ARE THE SUBJECT OF A TREE PRESERVATION ORDER.
COMPLIANCE OF A TREE PRESERVATION ORDER MAY LEAD TO CRIMINAL
PROSECUTION.
ANY INCURSION INTO THE PROTECTED AREA MUST BE WITH THE WRITTEN
PERMISSION OF THE LOCAL PLANNING AUTHORITY.

Protective Fencing

To be erected prior to the commencement of all works on site, and retained in place throughout construction.
Specification: To comprise of 2m tall welded mesh panels on rubber or concrete feet. Panels are to be joined together using a minimum of two anti-tamper couplers. Installed so that they can only be removed from inside the fence. The panels should be supported on the inner side by stabilizer struts, which should be attached to a base plate and secured with ground pins.
All weather notices should be erected at regular intervals on the weld mesh panels with words such as "Tree Protection Area - Keep Out".

Ground protection

New temporary ground protection should be capable of supporting any traffic entering or using the site without being distorted or causing compaction of underlying soil.
Note: The ground protection might comprise one of the following:
a) for pedestrian movements only, a single thickness of scaffold boards placed either on top of a driven scaffold frame, or as a suspended walkway; or on top of a compression-resistant layer (e.g. 100mm depth of woodchip); laid onto a geotextile membrane;
b) for pedestrian-operated plant up to a gross weight of 2t, proprietary inter-linked ground protection boards placed on top of a compression-resistant layer (e.g. 100mm depth of woodchip); laid onto a geotextile membrane;
c) for wheeled or tracked construction traffic exceeding 2t gross weight, an alternative system (e.g. proprietary system or pre-cast reinforced concrete slabs) to an engineering specification designed in conjunction with arboricultural advice, to accommodate the likely loading to which it will be subjected.
For situations other than those described in a) or b), the ground boarding is to be designed by a suitably qualified person to an engineering specification in conjunction with arboricultural advice, to be able to support the expected loading to be placed upon it.
In all cases, the objective of the ground boarding is to avoid compaction of the soil beneath, so that tree root function remains unimpaired.

Tree Work Schedule

No.	Species	Works	Category
1	Apple	Not to ground level	1

All tree work is to be undertaken in accordance with British Standard BS 3968:2010 Tree work - Recommendations.
All stumps are to be removed and the site is to be left as found.
Care is to be taken of the ground around retained trees to make sure that it does not become compacted as a result of tree surgery operations. No equipment or vehicles such as timber lorries, tractors, excavators or cranes shall be parked or driven beneath the crowns of any retained trees, to prevent subsequent compaction and root death.

Arboricultural Supervision

The arboricultural consultant will be required to attend site to directly supervise all demolition and construction works that have to be undertaken within the root protection areas. This will include:
1. Pre-commencement site meeting.
2. Location of protective measures.
3. Any additional demolition and/or excavations within or adjacent to RPAs, including foundations, hard surfacing or underground services (a non-exhaustive list).
4. Arboricultural sign off and removal of protective measures.

Arboricultural Method Statement

Please refer to Arbortech Consulting Ltd Tree Schedule and Arboricultural Method Statement, for full details on all surveyed trees and how all aspects of the development might be implemented without detriment to retained trees.



Project:
**59 Ennerdale Road
Richmond
TW9 2DN**

Client:
Richard Brewster

Drawing:
Tree Protection Plan

Based on:
1607-P2-C

Drawing No:
Arbtech TPP 01


Date:
Jan 2025

Scale:
1:100 @ A0

Drawn:
DM

Key:

Tree No.:	1	Tree Category:	Category 1	Trunk:	○
RPA:	○	Category 1	○	Category 2	○
Category:	○	Existing	○	Proposed	○
Protective fencing:	○	Ground boarding:	○		○

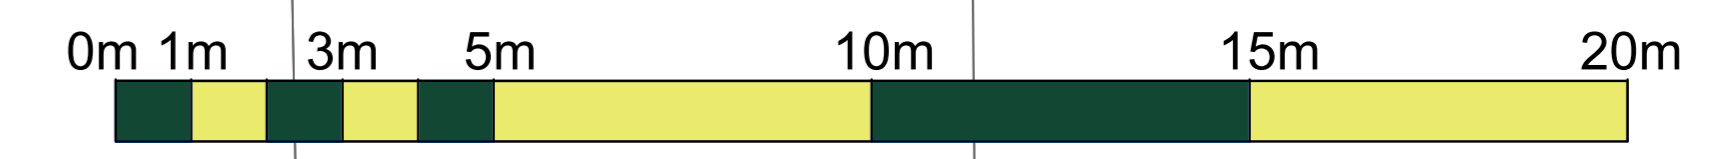


ENNERDALE ROAD

Ground protection:
The existing hard surface will be retained to act as ground protection within the RPAs of retained trees 1 & 2 for the duration of the development. If removed this should be done under direct arboricultural supervision and replaced with temporary ground boarding.

Protective fencing

Ground protection:
Temporary ground boarding

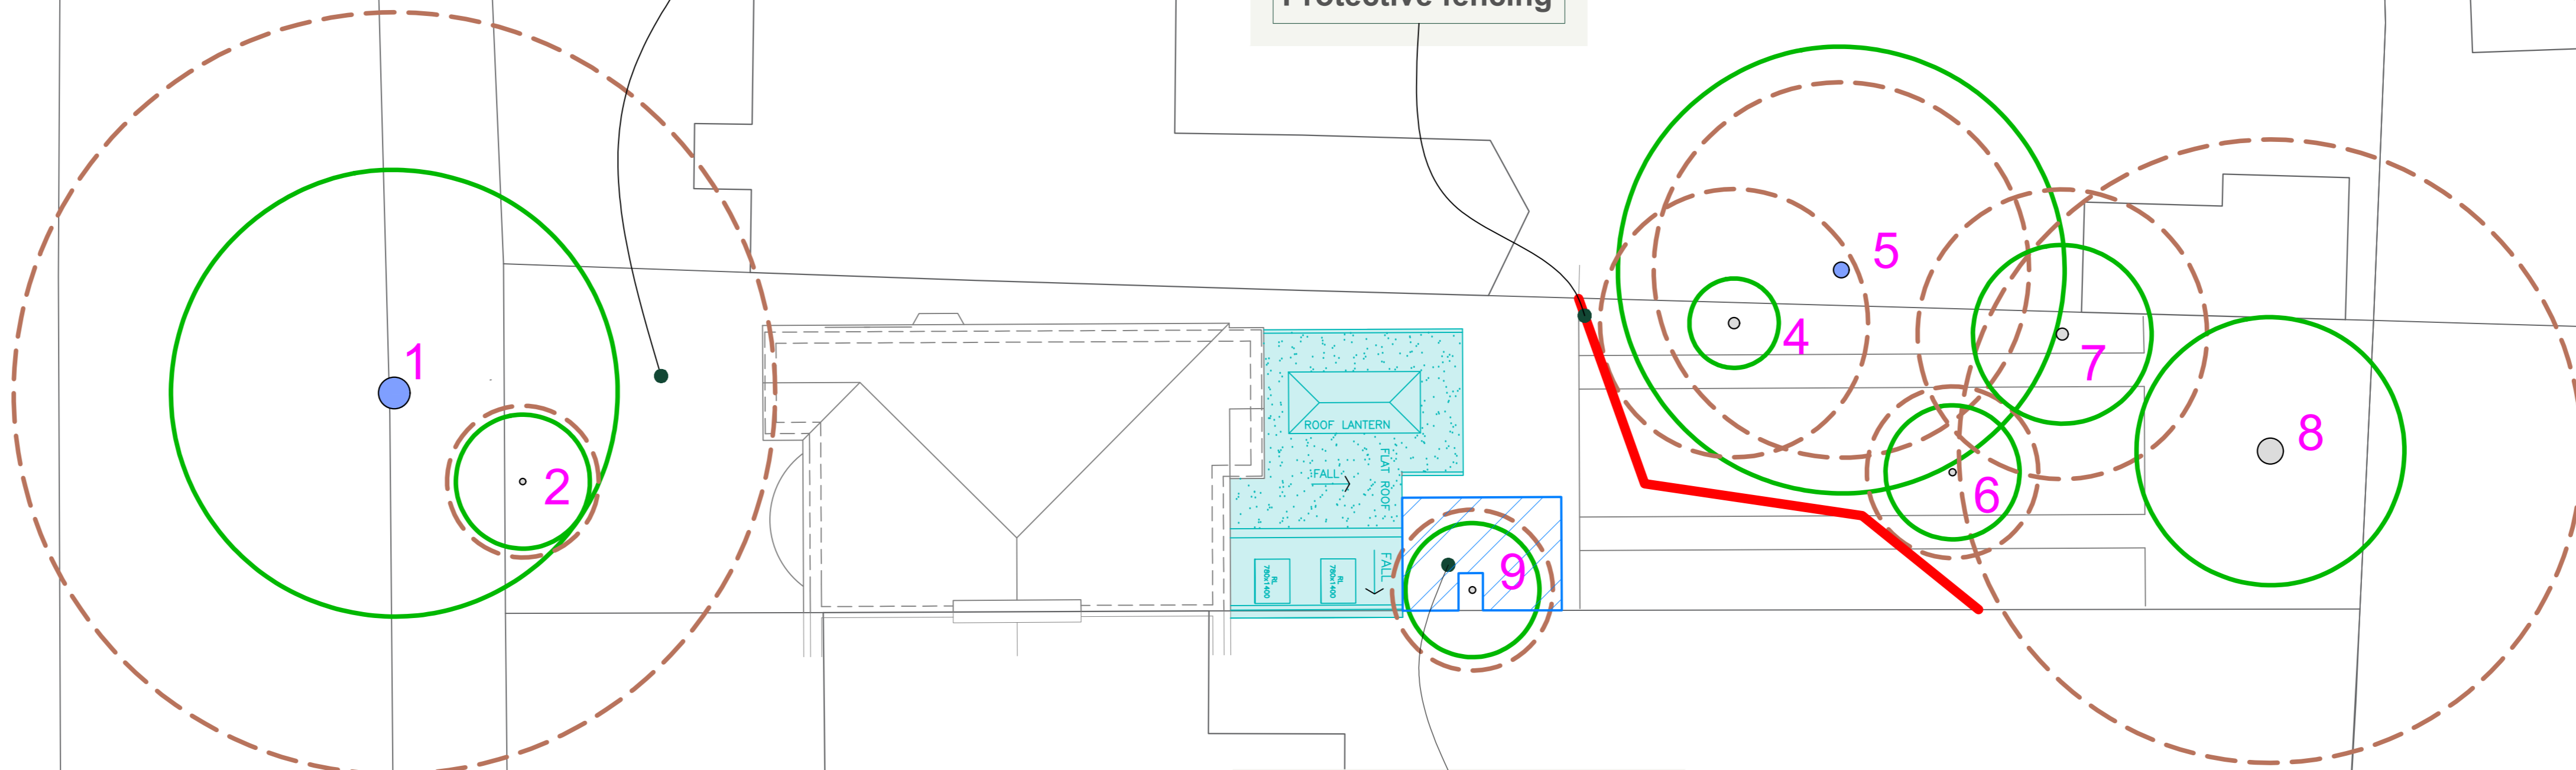

88

53

70

62

67